

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200MDP1T5B7M1RE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
			
ON	NONE	ON	
2-3,5-6	OPEN	2-1,5-4	




CIRCUIT: DPDT

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4(VA) @20V max. (ACor DC)
5. CONTACT MATERIAL:
Copper Alloy w/SILVER plate.
6. ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. CONTACT RESISTANCE: 20mILLI-Ohms max. Typical Initial @2-4VDC
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.



BOTTOM VIEW

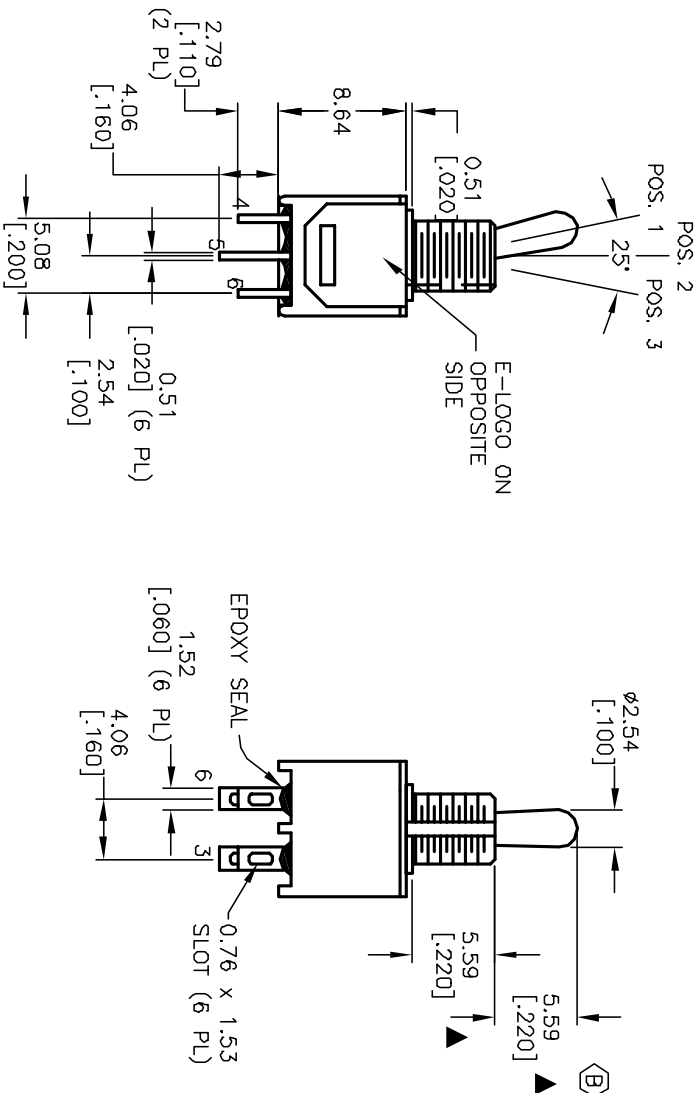

B	13094	5.59 WAS 6.86	4/29/03	AR
A	13040	RELEASED FOR PRODUCTION	4/14/03	AR
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE				
200MDP1T5B7M1RE				
E-SWITCH®				
SCALE	DATE	DR	DWG	REV
2:1	4/14/03	AR	T221019	B