

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)  
[200MDP2T1B3M6QE](#)



For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



SWITCH FUNCTION		
PDS: 1	PDS: 2	PDS: 3
DN	NONE	(DN)
2-3,5-6	OPEN	2-1,5-4

(DN) = MOMENTARY

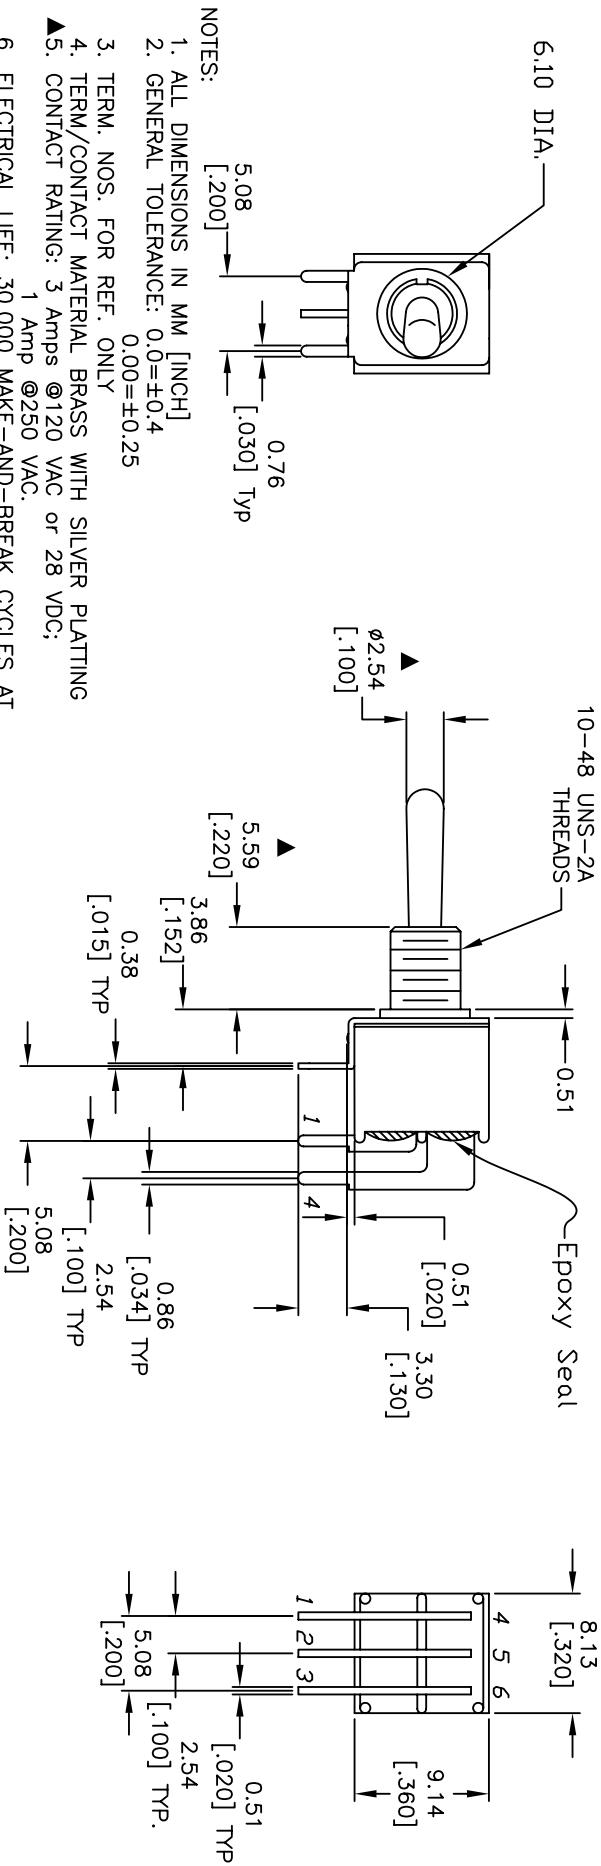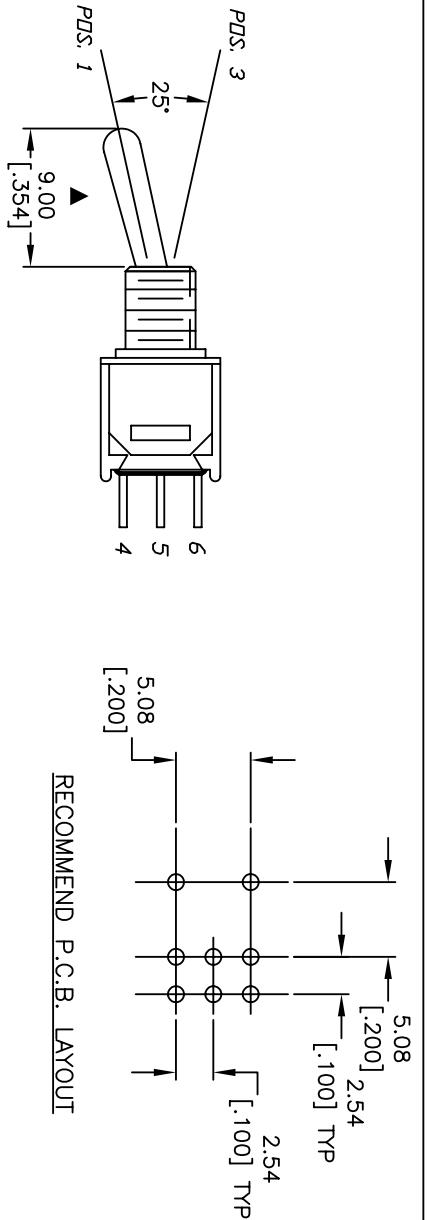

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: 0.0=±0.4 0.00=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. TERM./CONTACT MATERIAL BRASS WITH SILVER PLATING
  5. CONTACT RATING: 3 Amps @120 VAC or 28 VDC;  
1 Amp @250 VAC.
  6. ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
  7. INSULATION RESISTANCE: 1,000M OHMS MIN.
  8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
  9. OPERATING TEMP.: -40°C to 85°
  10. ▲ DENOTES CRITICAL PARAMETER.
  11. 2002/95/EC (ROHS) COMPLIANT

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	17427	9.40 ACTUATOR TO 9.00	7/2/07	TN
A	14258	RELEASED FOR PRODUCTION	8/23/04	AR

TITLE		SCALE		DATE		DR		DWG		REV	
200MDP2T1B3M6QE		2:1		7/2/07		TN		T211092		B	



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED