

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200MSP1T2B1M1QEH](#)

For any questions, you can email us directly:




sales@integrated-circuit.com

SHEET 1 OF 1



ISOMETRIC

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	OPEN	2-1

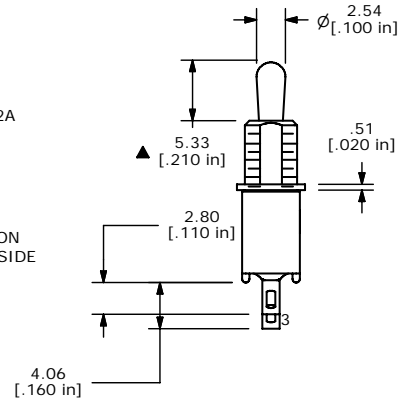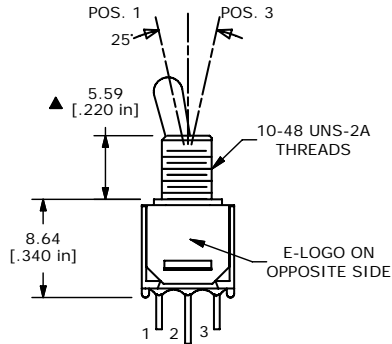

- NOTE:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - PLATING MATERIAL: SILVER
 - RATING: 3 AMPS @ 120VAC OR 28VDC UL, CUL
1 AMPS @ 250VAC UL, CUL
 - ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 - INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 - DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
 - OPERATING TEMP.: -30°C to 85°C
 - DENOTES CRITICAL PARAMETER.
 - HARDWARE TO BE SHIPPED BULK
- ▲ T200001 - HEX NUT - QTY 2
 T200000 - LOCK WASHER - QTY 1
 T200002 - LOCK RING - QTY 1



A	15111	REDRAWN	7/27/05	RC
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE 200MSP1T2B1M1QEH				
SCALE 2:1	DATE 7/27/2005	DR RC	DWG ST211037	REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED