

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200MSP1T3B4M6RE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



SHEET OF






CIRCUIT: SPDT

SWITCH FUNCTION

PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-3	OPEN	2-1

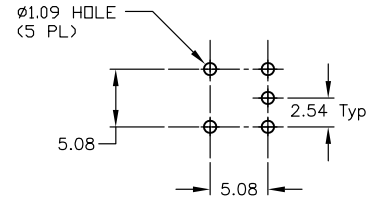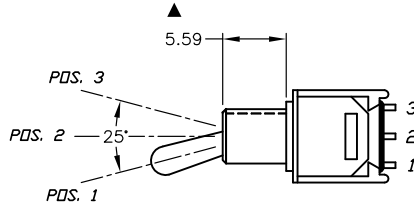

RECOMMENDED P.C.B LAYOUT

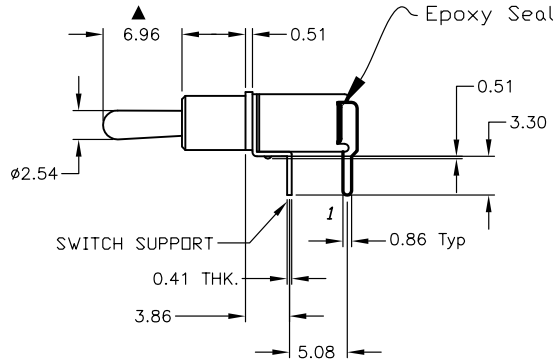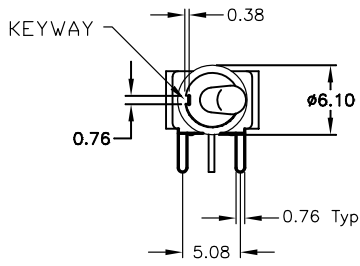

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
- ▲4. CONTACT RATING: 0.4VA MAX. @20 VAC OR DC
5. FIXED TERMINAL & MOVING CONTACT: GOLD PLATE OVER NICKLE PLATE
6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

TITLE					200MSP1T3B4M6RE				
SCALE	DATE	DR	DWG	REV	SCALE	DATE	DR	DWG	REV
2:1	11/26/03	AR	T211040	A					

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED