

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)  
[200MSP3T4B2M7RE](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

SHEET 1 OF 1




CIRCUIT: SPDT  
 CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1

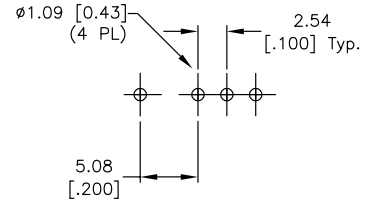

RECOMMENDED P.C.B. LAYOUT

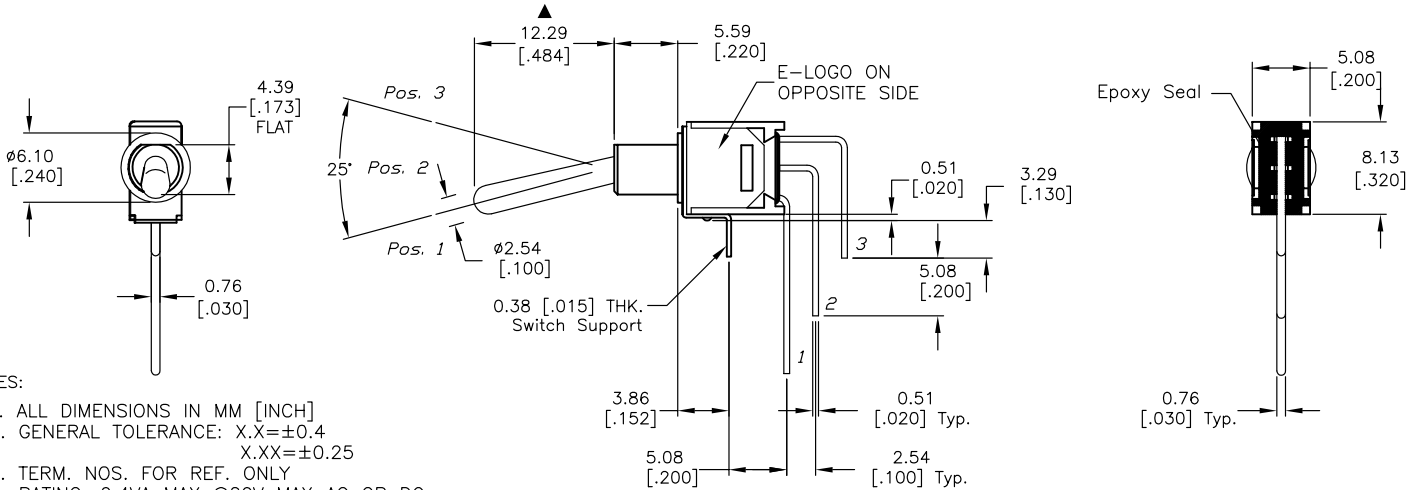

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. RATING: 0.4VA MAX @20V MAX AC OR DC.
  - ▲ 5. FIXED TERM. MOVING CONTACT: COPPER ALLOY WITH GOLD PLATE OVER NICKLE PLATE
  6. ELECTRICAL LIFE: 30,000 make-and-break cycle at full load.
  7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
  8. OPERATING TEMP.: -30°C to 85°C
  9. ▲ DENOTES CRITICAL PARAMETER.

**E-SWITCH®**

A	14021	RELEASED FOR PRODUCTION	5/19/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE					200MSP3T4B2M7RE				
SCALE	DATE	DR	DWG	REV	SCALE	DATE	DR	DWG	REV
2:1	5/19/04	AR	T211051	A					

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED