

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[200MSP4T1B4M7QE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


SHEET OF




CIRCUIT: SPDT
 CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
<DN>	OFF	<DN>
2-3	OPEN	2-1

()=Momentary

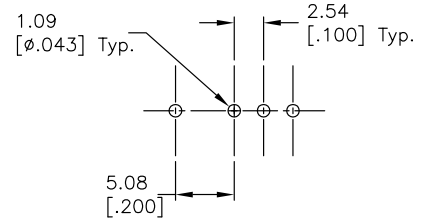

RECOMMEND P.C.B. LAYOUT

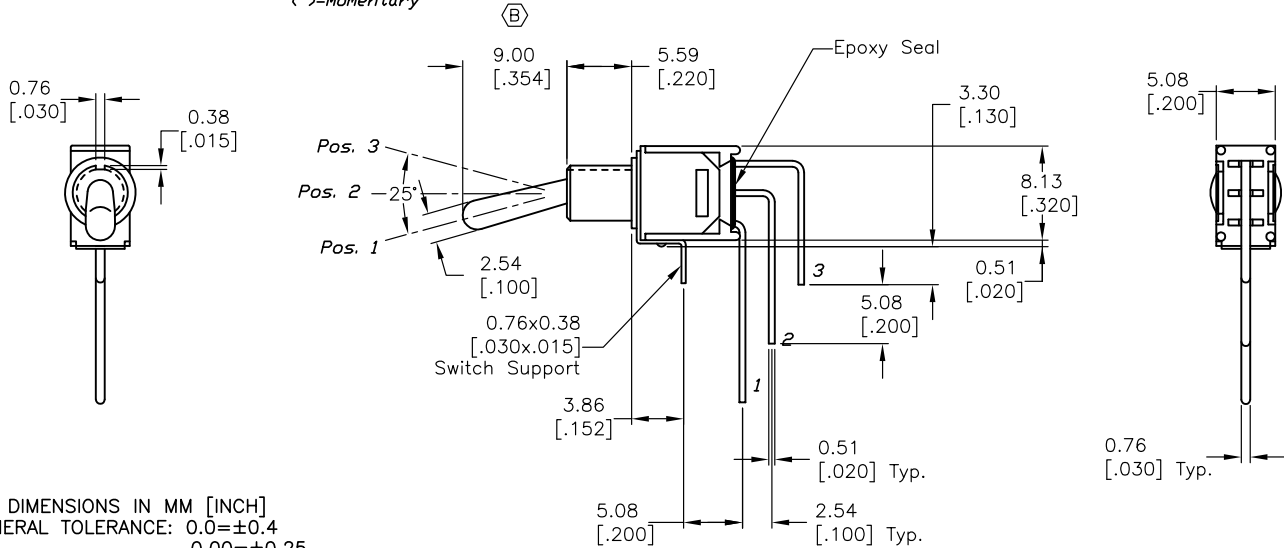

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: 0.0±0.4
0.00±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 3A @120VAC or 28VDC; 1A @250VAC.
- FIXED TERM. MOVING CONTACT: Silver plated Copper alloy
- ELECTRICAL LIFE: 30,000 make-and-break cycle at full load.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C

E-SWITCH®

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	14465	CORRECT ACTUATOR	11/8/04	AR
A	10333	RELEASED FOR PRODUCTION		

TITLE				
200MSP4T1B4M7QE				
SCALE	DATE	DR	DWG	REV
2:1	8/26/99	MM	T211050	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED