

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[3003P1J1M7QE](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

SHEET 0F

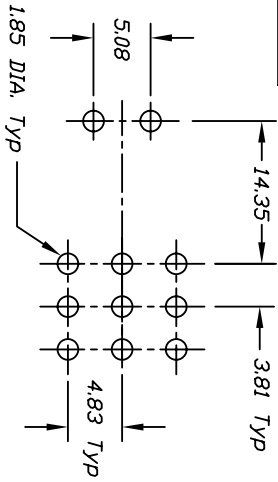




CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NONE	DN
2-3-5-6	OPEN	2-1-5-4
8-9		8-7

- NOTES:
1. ALL DIMENSIONS IN MM
 2. TERMINAL NUMBERS FOR REF ONLY
 3. PLATING MATERIAL: SILVER
 4. RATING: 2A @250VAC, 5A @120VAC OR 28VDC AT FULL LOAD.
 5. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES
 6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 7. DIELECTRIC STRENGTH: 1,000 V RMS @50A LEVEL.
 8. OPERATING TEMP: -30°C to 85°C
 10. ▲ DENOTES CRITICAL PARAMETER.

REV.	ECN NO.	DESCRIPTION	DATE	CHKD.
A		RELEASED FOR PRODUCTION	8/5/05	PV
B	15140	REVISED/ADD NOTES 4-10		

TOLERANCES	
0.0	±0.4
0.00	±0.25

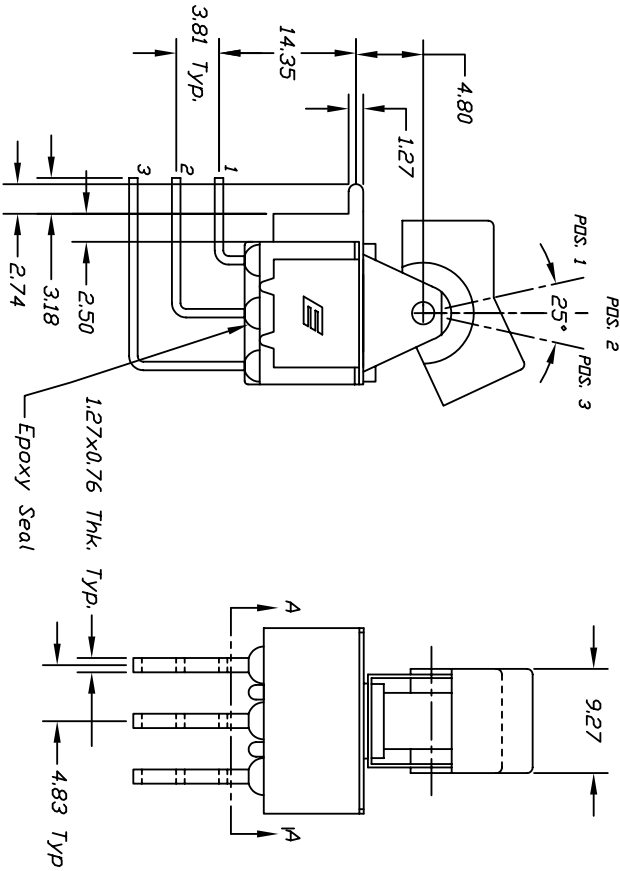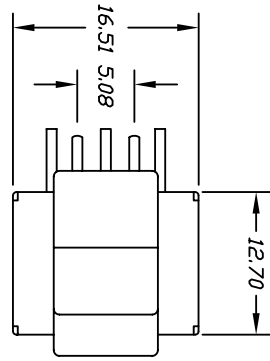

TITLE		SCALE	DATE	DR	DWG	REV
300 3P1 J1 M7 Q E		2:1	6/1/98	MM	T331006	B

E-SWITCH®