

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[300AWSP4J1VS2QE](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET OF

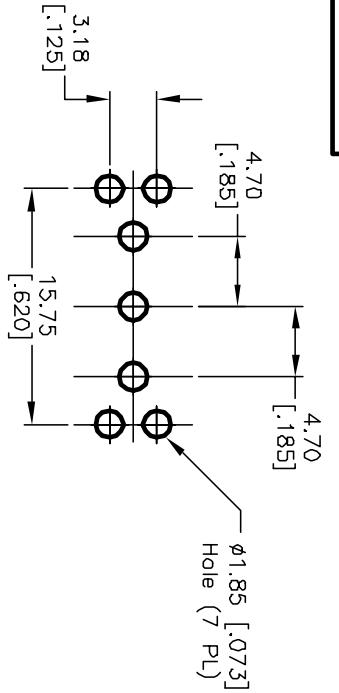

RECOMMENDED P.C.B. LAYOUT




SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
<DN>	DEF	<DN>
2-3	DPEN	2-1

NOTES:

() =Momentary

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC
2A @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver Plate
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C
11. ACTUATOR: COLOR: BLACK NYLON UL94HB

**SHOWN IN MOMENTARY
POSITION FOR OVERALL
HEIGHT

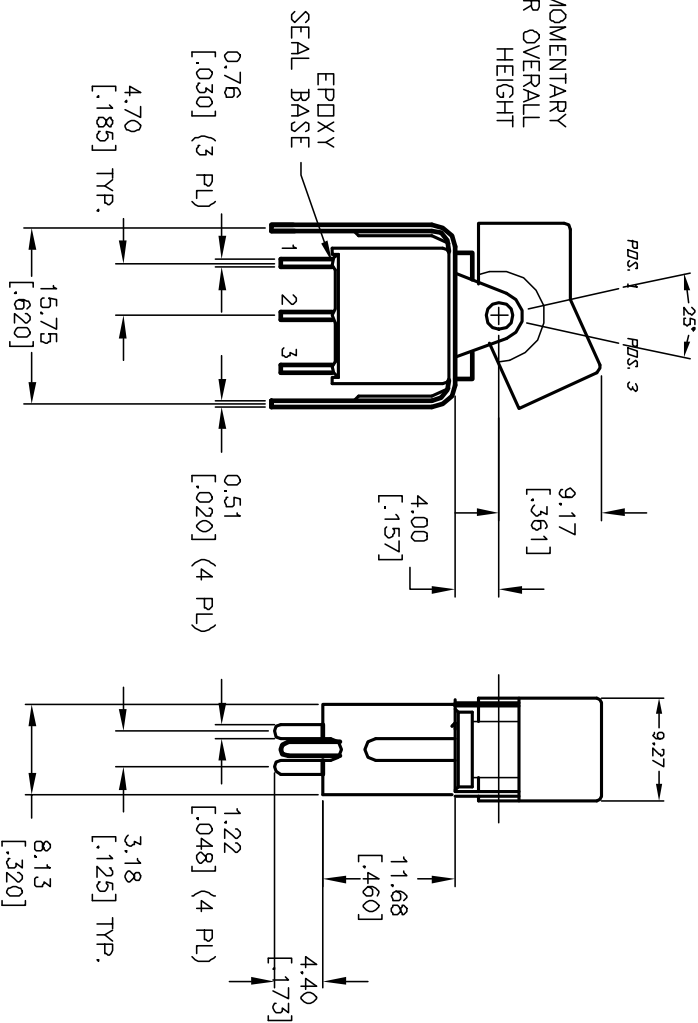

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12303	RELEASED	7/11/02	CJB

TITLE	SCALE	DATE	DR	DATE	REV
300A WSP-4 J1 VS2 Q E	2:1	7/11/02	CJB	T301430	A

E-SWITCH®

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSMITTED