

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[300DP2R6BLKM3QE](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

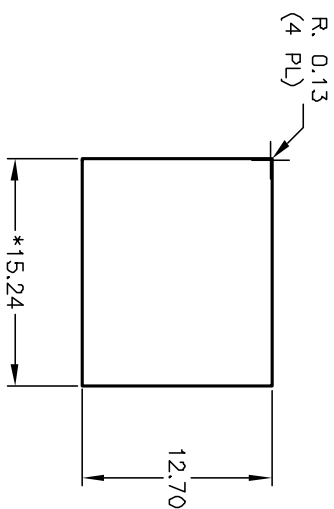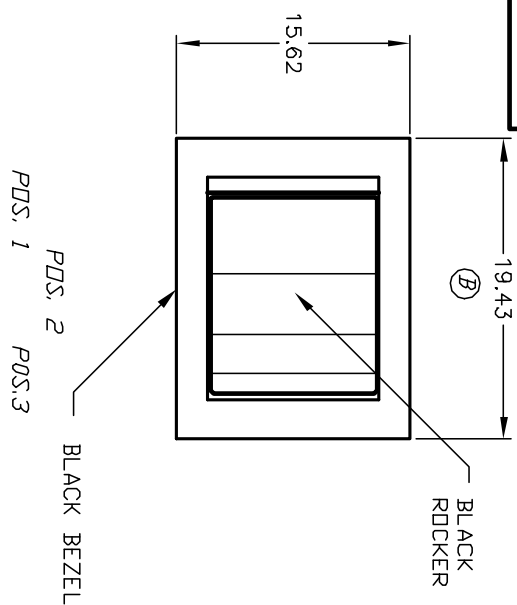

PANEL THICKNESS
* DIMENSION IS 15.75/15.88
FOR PANEL THICKNESS BETWEEN
1.52mm TO 3.18mm

SWITCH FUNCTION			
	PDS. 1	PDS. 2	PDS. 3
			
DN		NONE	(DN)
2-3,5-6		OPEN	2-1,5-4



< >=MENTARY



CIRCUIT: DPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
X.XX=±0.4
2. GENERAL TOLERANCE: X.X=±0.4
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 2BVDC
2A @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver Plate
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

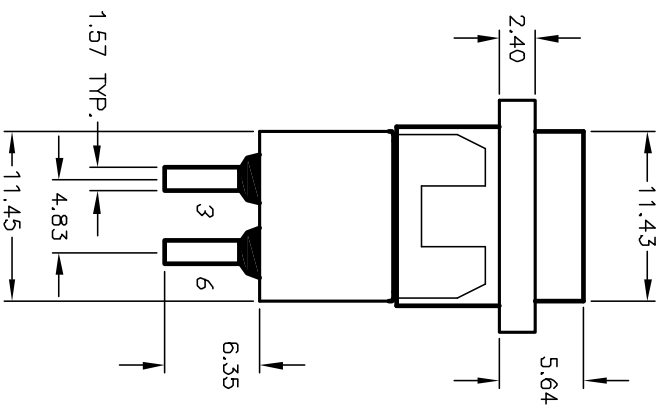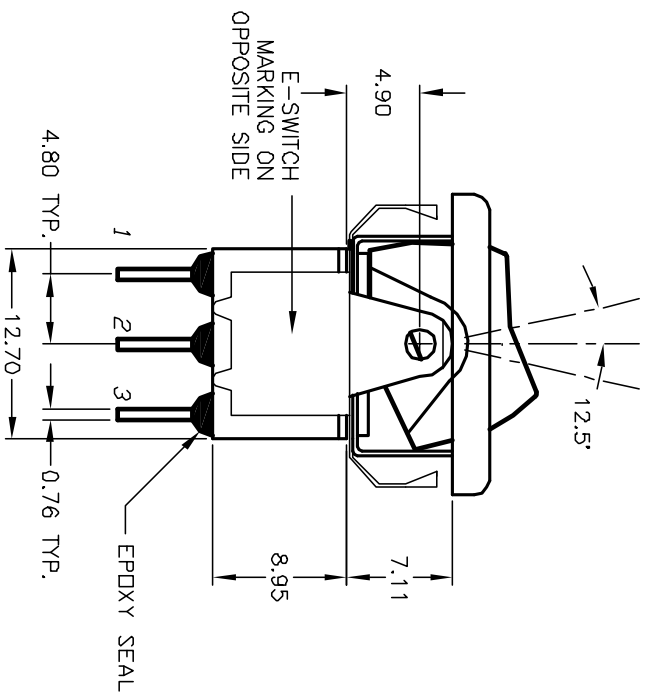

B	12120	DIMENSION WAS 2010	5/6/02	CB
A	12031	RELEASED FOR PRODUCTION	4/2/02	CB
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

TITLE			
300 DP-2 R6 BLK M3 Q E BLK			
SCALE	DATE	DR	REV
2:1	4/2/02	CB	B