






Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[300DP4J3BLKM2RE](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

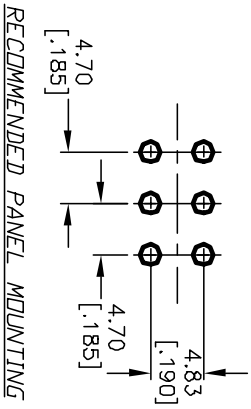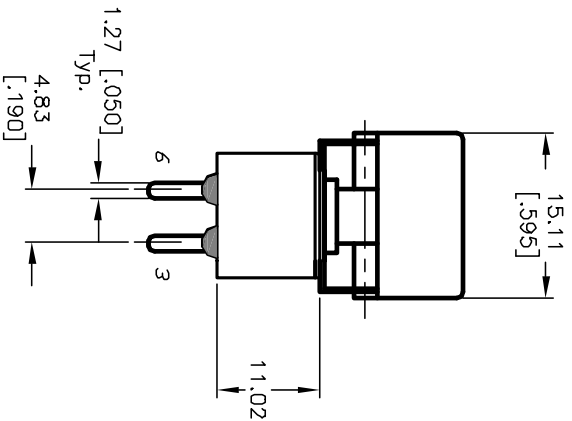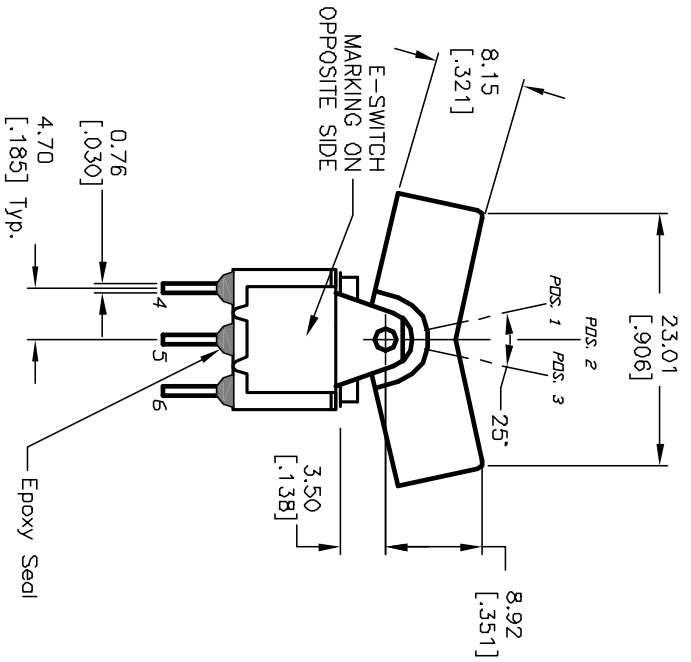

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
(DN)	OFF	(DN)	
2-3,5-6	OPEN	2-1,5-4	

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20 max. (AC or DC)
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Gold plate over Nickel plate.
6. CONTACT RESISTANCE: 10mILLI Ohms max initial @2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
8. INSULATION RESISTANCE: 1,000M Ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

E-SWITCH®

B	12759	DESCRIPTION WAS INCORRECT	2/24/03	CB
A	12759	RELEASED FOR PRODUCTION	1/27/03	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE	300 DP-4 J3 M2 RE (GOLD CONTACTS)	SCALE	1.5:1	DATE	1/27/03	DR	CB	DWG	T3224032	REV	B
-------	-----------------------------------	-------	-------	------	---------	----	----	-----	----------	-----	---

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PREPARED FOR THE E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED