

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)  
[400MDP2R6BLKM7QE](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

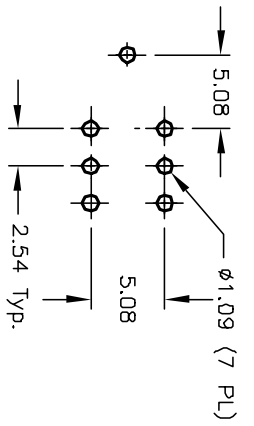

RECOMMENDED P.C.B. LAYOUT



CIRCUIT: DPDT  
 CONTACT CONFIGURATION


SWITCH FUNCTION		
PQS. 1	PQS. 2	PQS. 3
DN	NONE	DN
2-3,5-6	OPEN	2-1,5-4

(B)

[ 1 ] = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120VAC, OR 28VDC  
1A @250VAC
5. FIXED TERMINAL/MOVING CONTACT MATERIAL:  
COPPER ALLOY w/SILVER PLATING
6. ELECTRIC LIFE: 30,000 make-and-break cycles  
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP. -50°C to +85°C
10. ▲ DESIGNATE MAJOR FEATURE

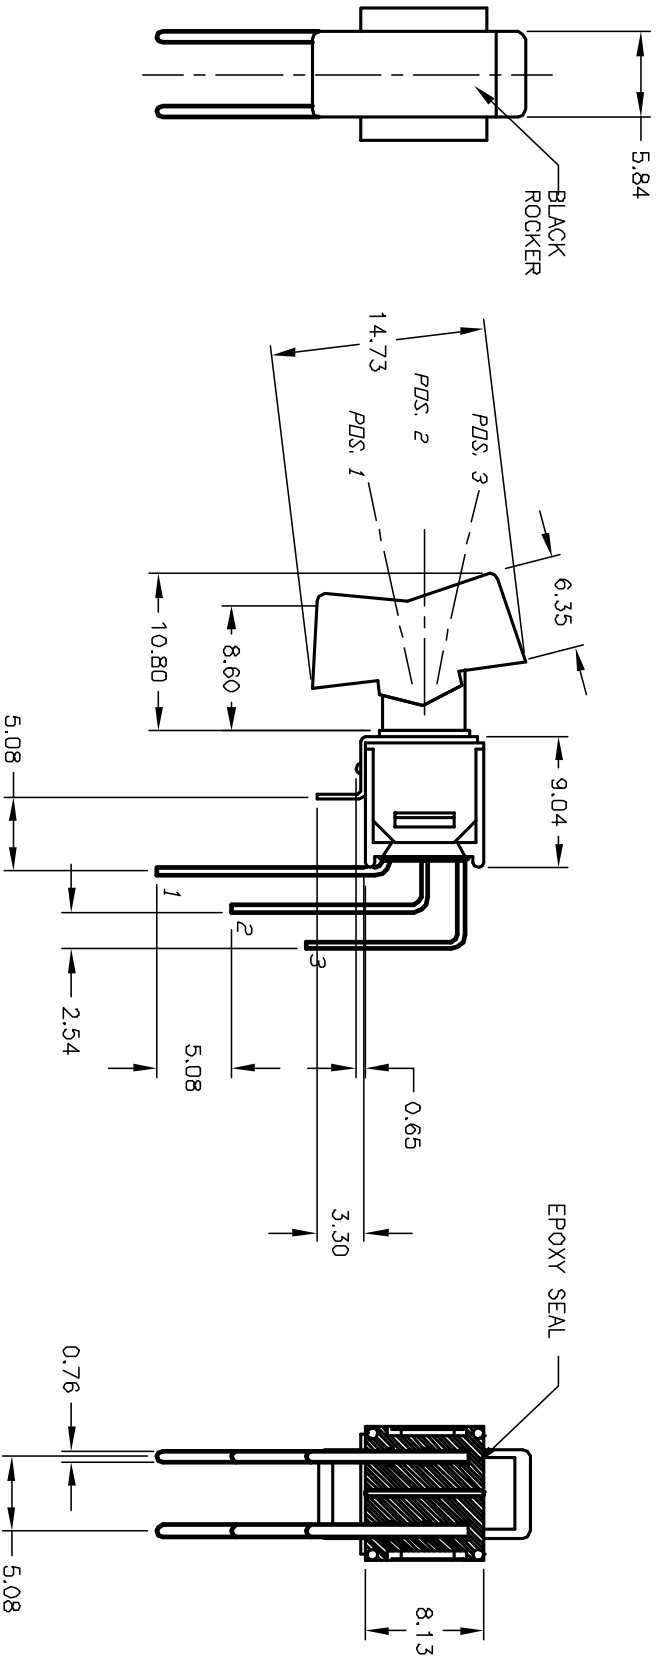

REV.	B	12074	FUNCTION WAS CHG DN	4/18/02	CJB
ECN NO.			DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

TITLE		400 MDP-2 R6 (BLK) M7 QE	
SCALE	2:1	DATE	2/8/02
DR	CJB	DWG	T421007
REV	B		

**E-SWITCH®**