

## Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)  
[400MSP1R6BLKVS2RE](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

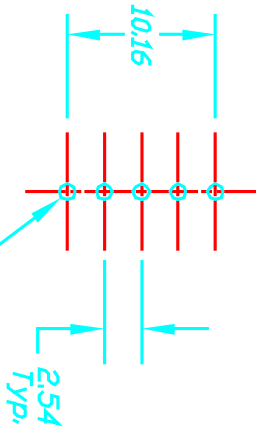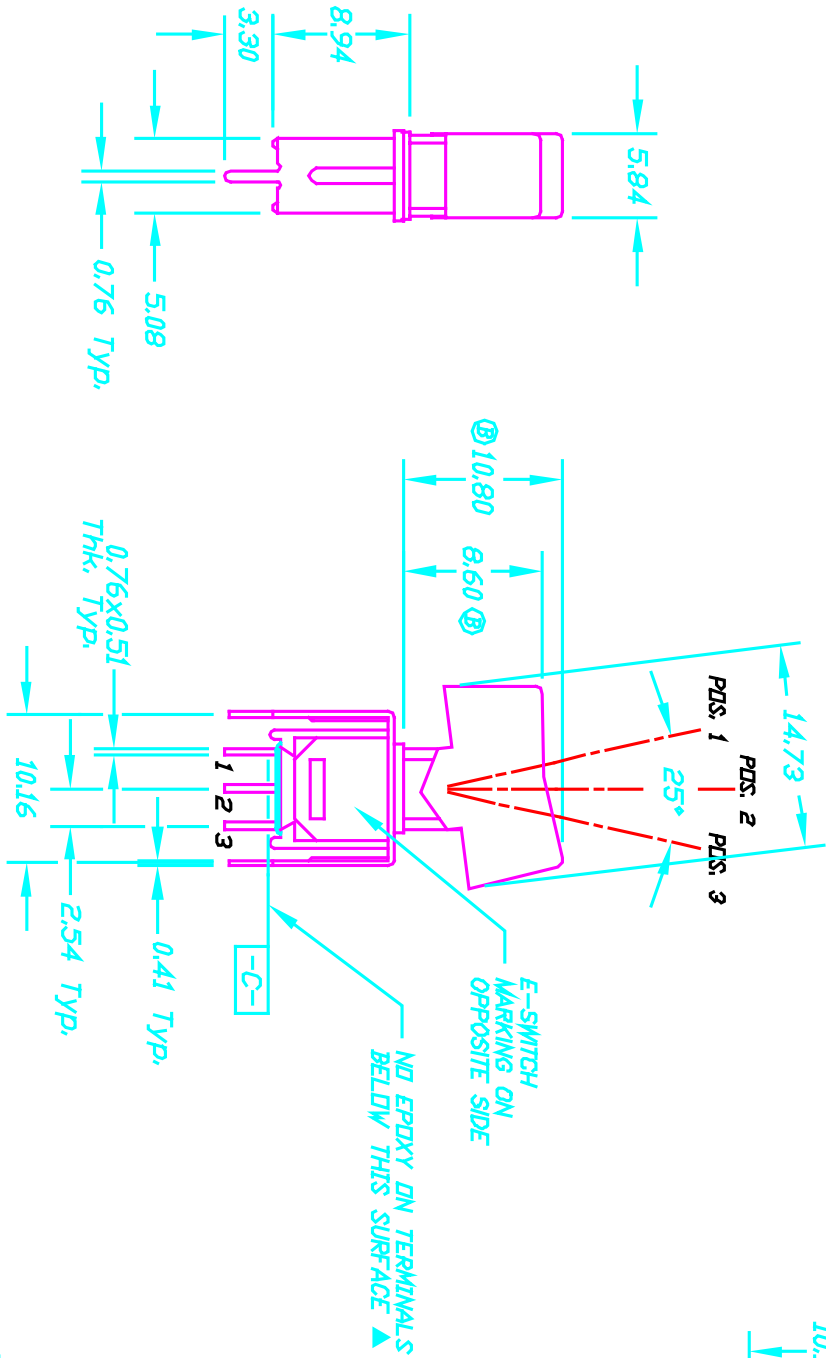

CIRCUIT: SPDT CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS: 1	PDS: 2	PDS: 3
DN	NONE	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4  
0.00=±0.25
3. CONTACT RATING: 0.4(VA) max. 20VAC or DC max.
4. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/Au plate over Ni plate.
5. ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
6. INSULATION RESISTANCE: 1,000 Ohms min.
7. DIELECTRIC STRENGTH: 1,000 V RMS sea level.
8. OPERATING TEMP.: -30°C to 85°C

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	10276	RELEASED FOR PRODUCTION		

TITLE		SCALE	DATE	DR	3WG	REV
400 MSP-1 R6/BLK VS2 R E		2:1	7/14/99	MM	T411018	A



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED