

Excellent Integrated System Limited


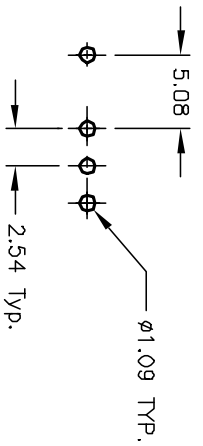
Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[400MSP4R1BLKM7QE](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

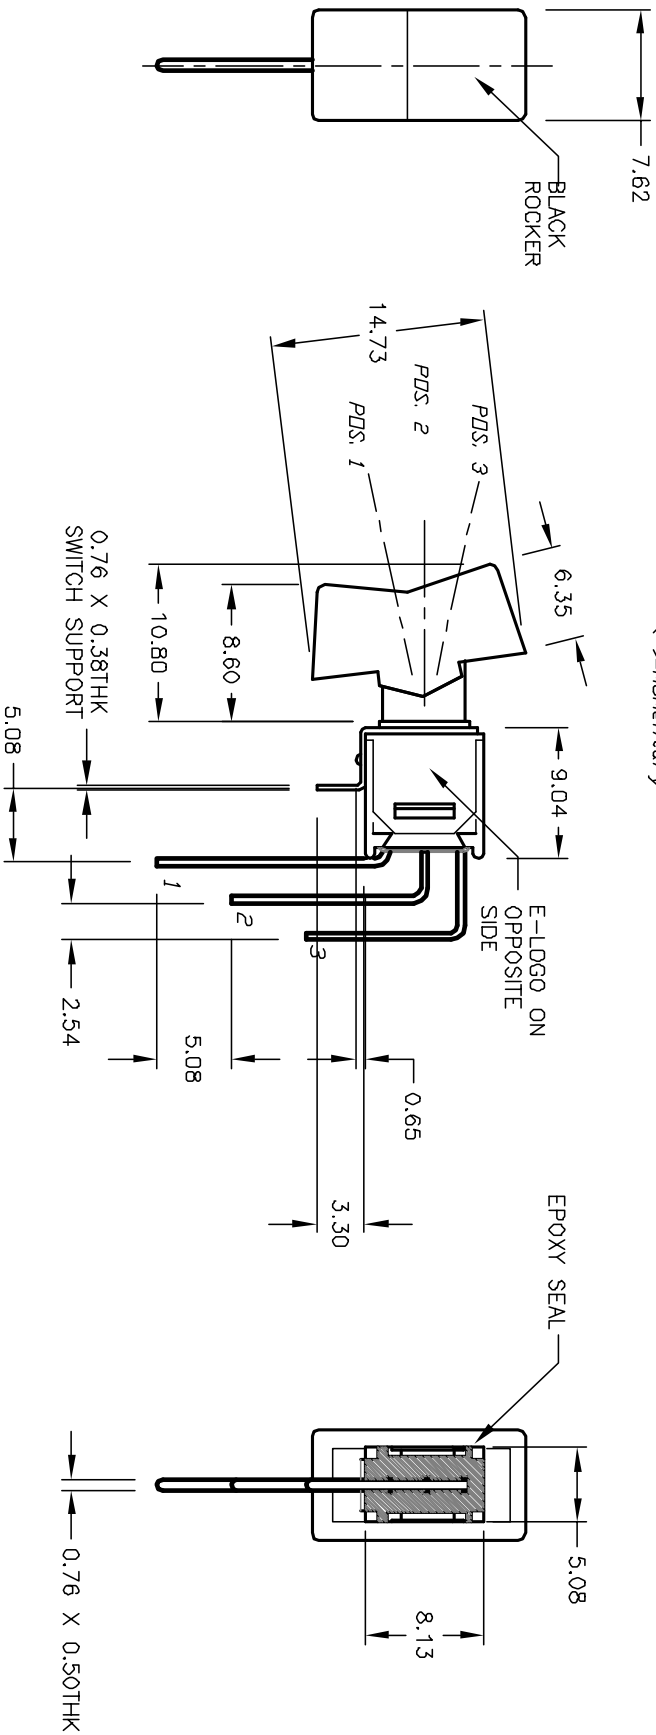


CIRCUIT: SPDT
 CONTACT CONFIGURATION

RECOMMENDED P.C.B. LAYOUT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
		
<DN>	DEF	<DN>
2-3	DPEN	2-1

()=Momentary



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120VAC, OR 28VDC
1A @250VAC
5. FIXED TERMINAL/MOVING CONTACT MATERIAL:
COPPER ALLOY w/SILVER PLATING
6. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP. -50°C to +85°C
10. ▲ DESIGNATE MAJOR FEATURE

REV.	A	ECN No.	12275	RELEASED	6/27/02	CJB	CHKD	SCALE	2:1	DATE	6/27/02	DR	CJB	DWG	T414013	REV	A
DESCRIPTION																	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED																	

E-SWITCH®

400 MSP-4 R1 (BLK) M7 QE