

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[500SDP1S1M6REA](#)


For any questions, you can email us directly:

sales@integrated-circuit.com


SHEET 1 OF 1

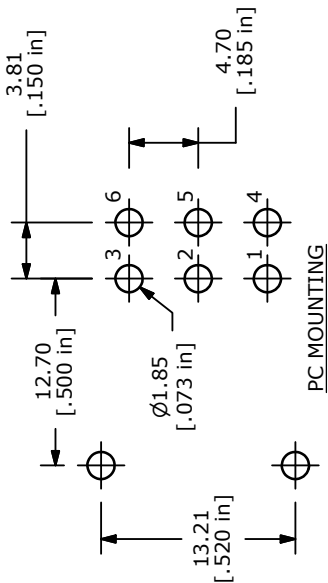




SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
ON	NONE	ON	
2-1, 5-4	N/A	2-3, 5-6	



- NOTE:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X: X=±0.4
X.XX=±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - PLATING MATERIAL: GOLD
 - CONTACT RATING: 0.4VA@20V (AC or DC)
 - CONTACT RESISTANCE: 10 MILLI-OHMS MAX.
 - LIFE EXPECTANCY: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 - INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 - DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
 - OPERATING TEMP.: -30°C to 85°C
 - ▲ DENOTES CRITICAL PARAMETER.
 - 2002/95/EC (ROHS) COMPLIANT

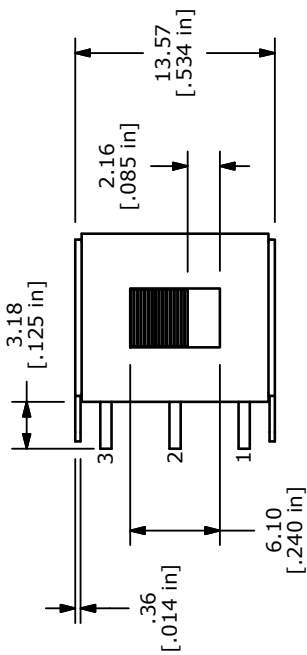

ISOMETRIC

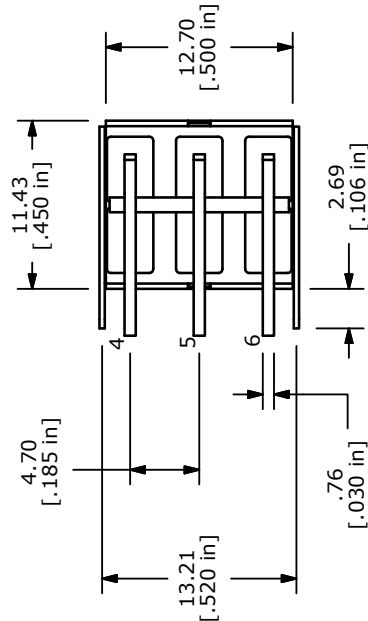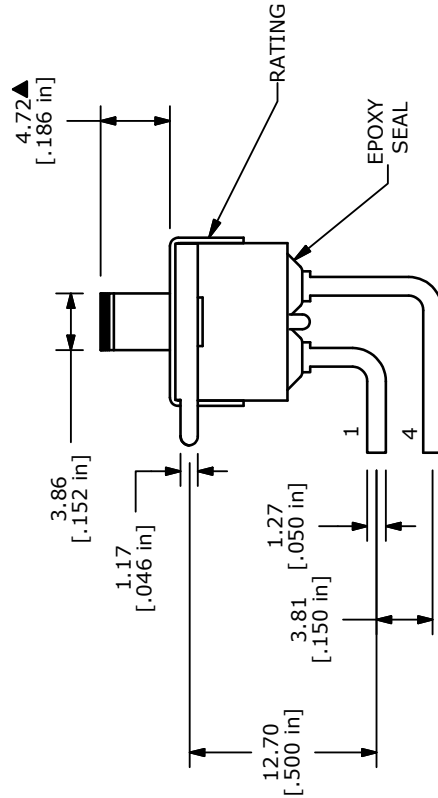

TITLE 500SDP1S1M6REA

C	19567	DRAWING UPDATE / CLEAN-UP	1/7/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	2:1	DATE	1/7/2011	DR	BGL	DWG	T521007	REV	C
-------	-----	------	----------	----	-----	-----	---------	-----	---