

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[500SSP1S2M6REA](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET OF

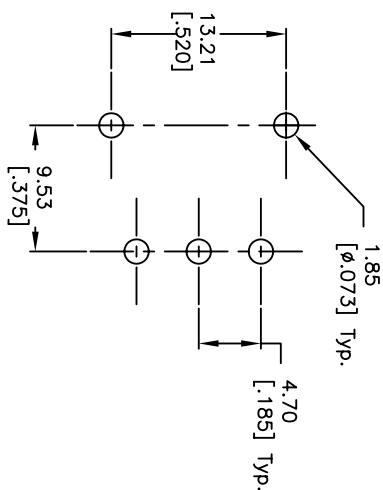

RECOMMEND P.C.B. LAYOUT







CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
		
DN	NONE	DN
2-1	N/A	2-3

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0±0.4
0.00±0.25
3. TERM. NOS. FOR REF. ONLY
4. TRAVEL: 0.4(VA) max. @20 max. (AC or DC)
5. RAY: 2.16 [0.085]
6. ELECTRICAL LIFE: 30,000 ACUTATIONS AT FULL LOAD
7. INSULATION RESISTANCE: 1,000 mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sed level
9. OPERATING TEMP.: -30°C to 85°C

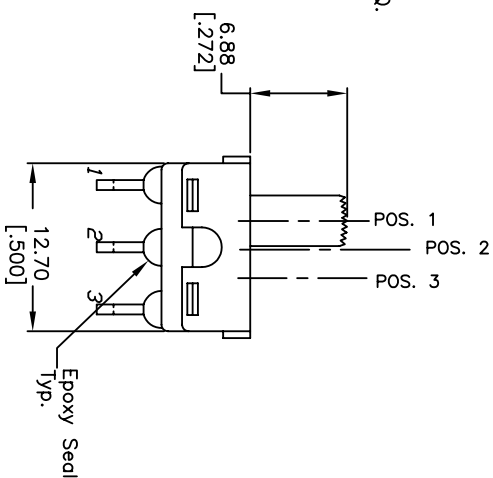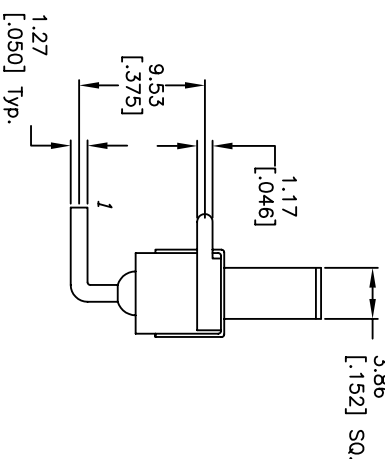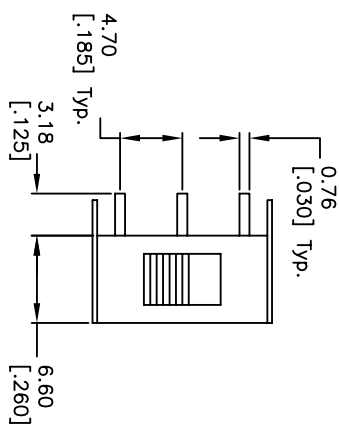

B	16446	CLEANED UP DWG.	9/14/06	BD
A	10782	RELEASED FOR PRODUCTION	7/18/00	MM
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®				
TITLE				
500SSP1S2M6REA				
SCALE	DATE	DR	DWG	REV
2:1	7/18/00	MM	T511035	B