

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[E-Switch](#)
[700SP7M1QEAP1BLK](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



SHEET 1 OF 1

| SWITCH FUNCTION | |
|-----------------|--------|
| POS. 1 | POS. 2 |
| | |
| ON | (ON) |
| 1-3 | 1-2 |

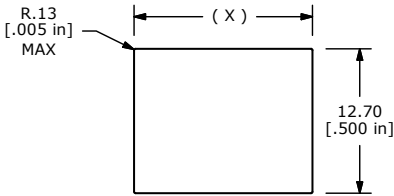

| PANEL THICKNESS | (X) DIM. |
|-----------------|---------------|
| 1.19 - 2.30 | 15.70 |
| 2.31 - 3.18 | 15.75 - 15.88 |

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. PLATING MATERIAL: SILVER
 5. RATING: 1A @ 250VAC
3A @ 125 VAC OR 28VDC
 6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
 7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 8. ACUATION FORCE: 300 ± 100gf
 9. TRAVEL: 1.0 ± 0.2mm
 10. CONTACT RESISTANCE: 20 mOHM MAX.
TYPICAL @ 2-4 VDC
 11. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL.
 12. OPERATING TEMP.: -30°C to 85°C
 13. ▲DENOTES CRITICAL PARAMETER.
 14. 2002/95/EC (ROHS) COMPLIANT.

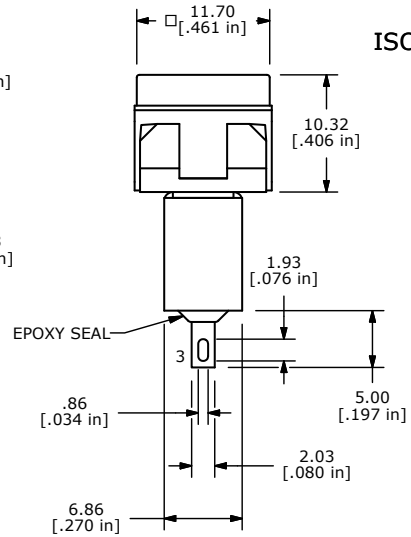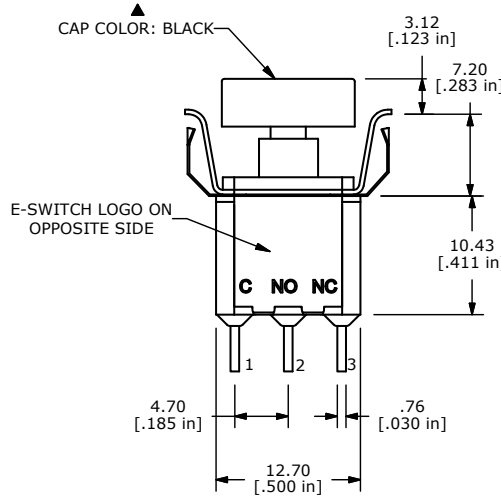

| | | | | |
|------------------------|----------------|--------|-------------|-------|
| | | | | |
| TITLE 700SP7M1QEAP1BLK | | | | |
| SCALE 2:1 | DATE 7/27/2011 | DR BGL | DWG T711901 | REV C |

| C | 20057 | DRAWING UPDATE / CLEAN-UP | 7/27/11 | BGL |
|---|--------|---------------------------|---------|-----|
| REV | PCR NO | DESCRIPTION | DATE | BY |
| <small>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</small> | | | | |