

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)

[800SP8B10M7QEC1RED](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

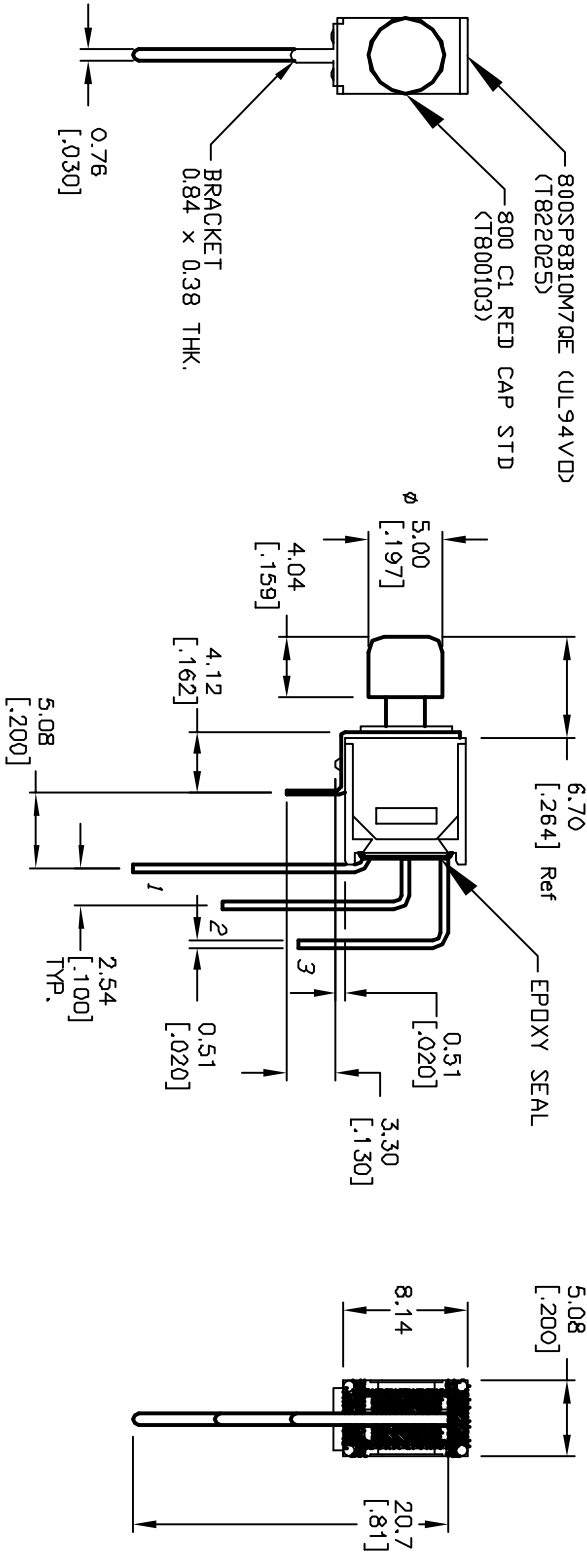

NOTES:


1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120V or 28VDC;  
1A @250VAC
5. FIXED TERM. & MOVING CONTACT:  
Copper Alloy w/SILVER plate.
- ▲ 6. PLUNGER AND BODY: UL94 V0
7. CONTACT RESISTANCE:  
20milli-ohms initial @2-4VDC.
8. ELECTRICAL LIFE: 60,000 make-and-break  
cycles at full load.
9. INSULATION RESISTANCE: 1,000M ohm min.
10. DIELECTRIC STRENGTH: 1000V RMS @sea level
11. OPERATING TEMP.: -30°C to 85°C



CIRCUIT: SPDT

SWITCH FUNCTION	DATE
DN	<DN>
2-1	2-3

< > =MOMENTARY

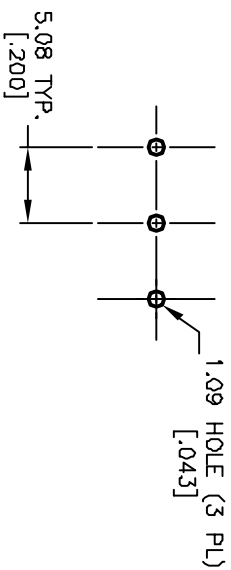

RECOMMENDED P.C.B. LAYOUT

REV.	ECN NO.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
A	13270	RELEASED FOR PRODUCTION	7/7/03	AR	2:1	7/7/03	AR	XT0096P	A
<p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED</p>									
TITLE					800 SP-8 B10 M7 Q E/C1 RED (UL94V0)				
<b>E-SWITCH®</b>									