

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)

[KC14A13.001NLS](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

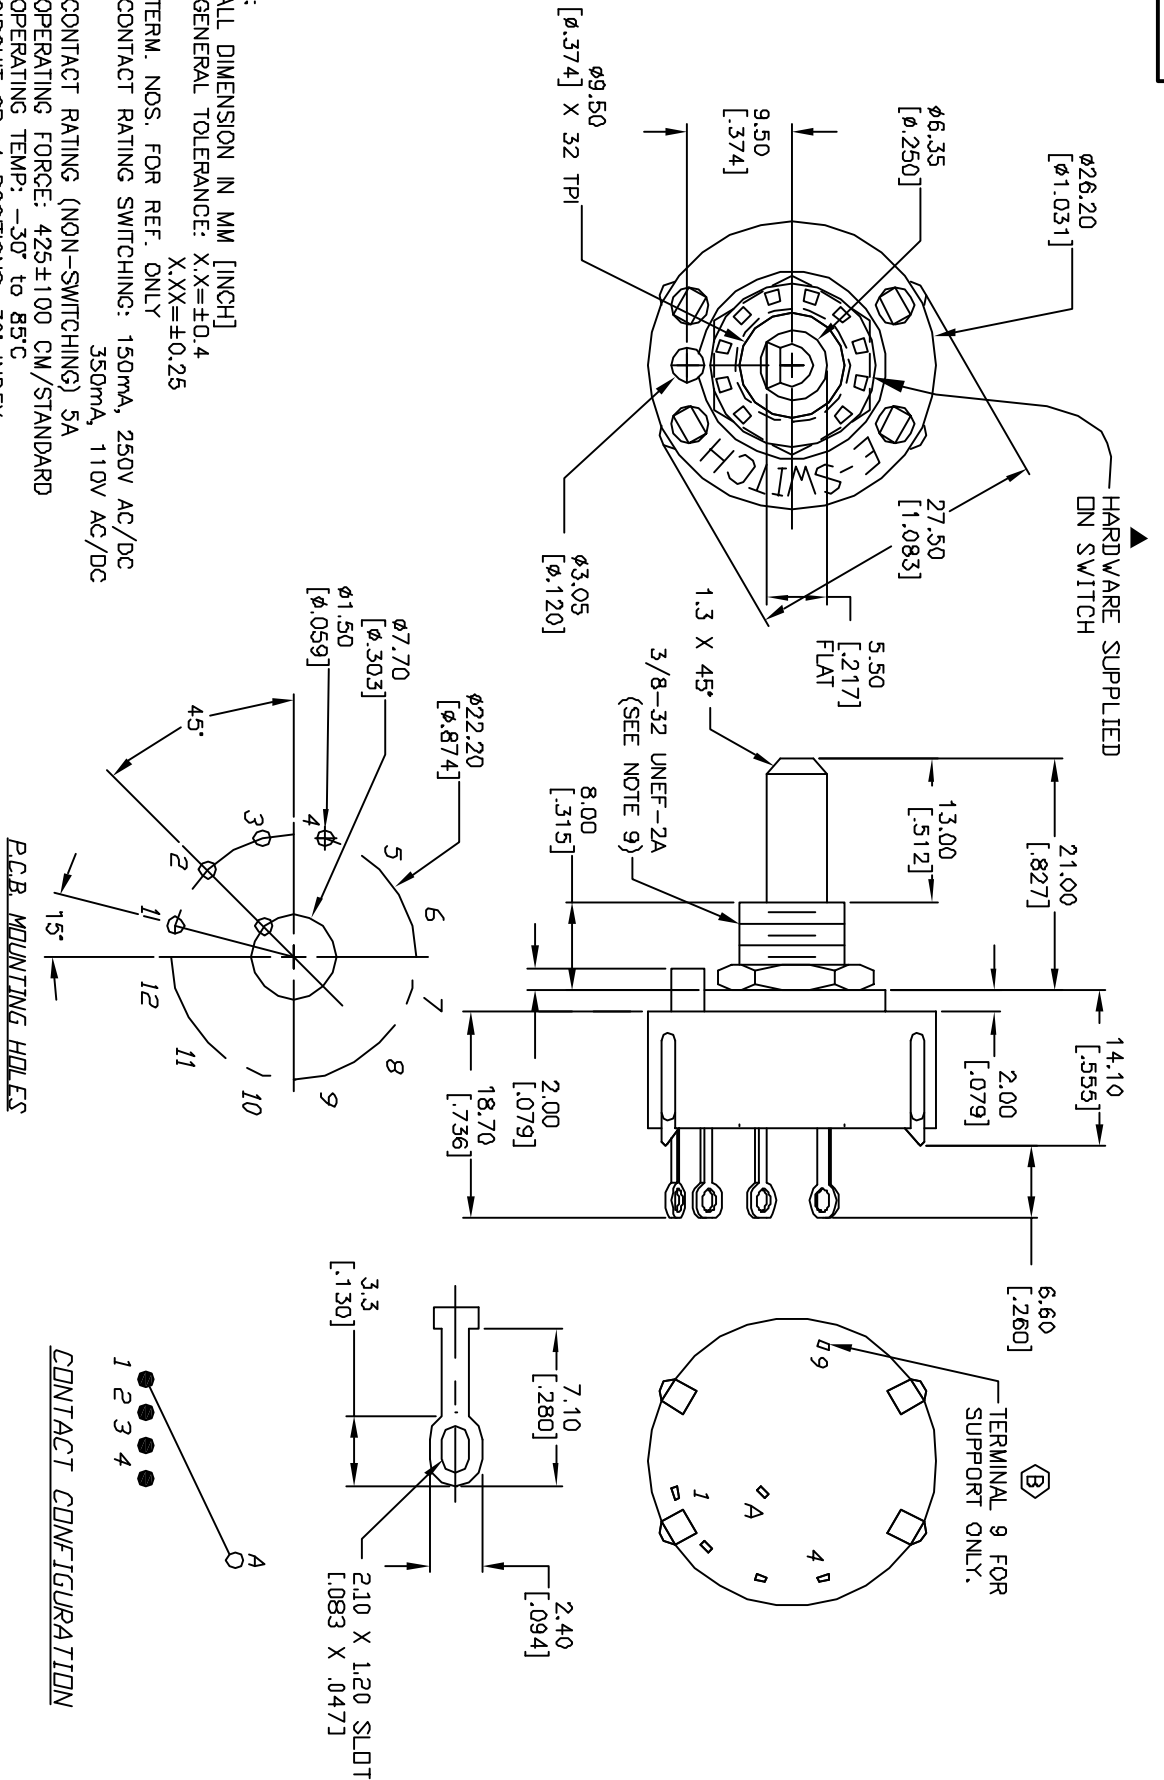

NOTES:

1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: X.X= $\pm 0.4$   
X.XX= $\pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC  
350mA, 110V AC/DC
5. CONTACT RATING (NON-SWITCHING) 5A
6. OPERATING FORCE: 425 $\pm$ 100 CM/STANDARD
7. OPERATING TEMP: -30° to 85°C
8. CIRCUIT SP: 4 POSITIONS, 30° INDEX
9. DIELECTRIC STRENGTH 1000V RMS min.  $\phi$  SEA LEVEL
10.  $\triangle$  DENOTES CRITICAL PARAMETER
11. HARDWARE SUPPLIED ON SWITCH - SEE BELOW  
STOP RING, LOCKWASHER & HEX NUT

B	13286	CORRECT NOTE 8, ADD TERM 9	NOTE	7/14/03	AR
A	13277	RELEASED FOR PRODUCTION		7/10/03	AR
REV.	ECN NO.	DESCRIPTION	DATE	CHKD	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

**E-SWITCH®**

KC14A13.001NLS

SCALE	DATE	DR	DWG	REV
1.5:1	7/10/03	AR	G510888	B