

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[KC18A10.001NLS](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

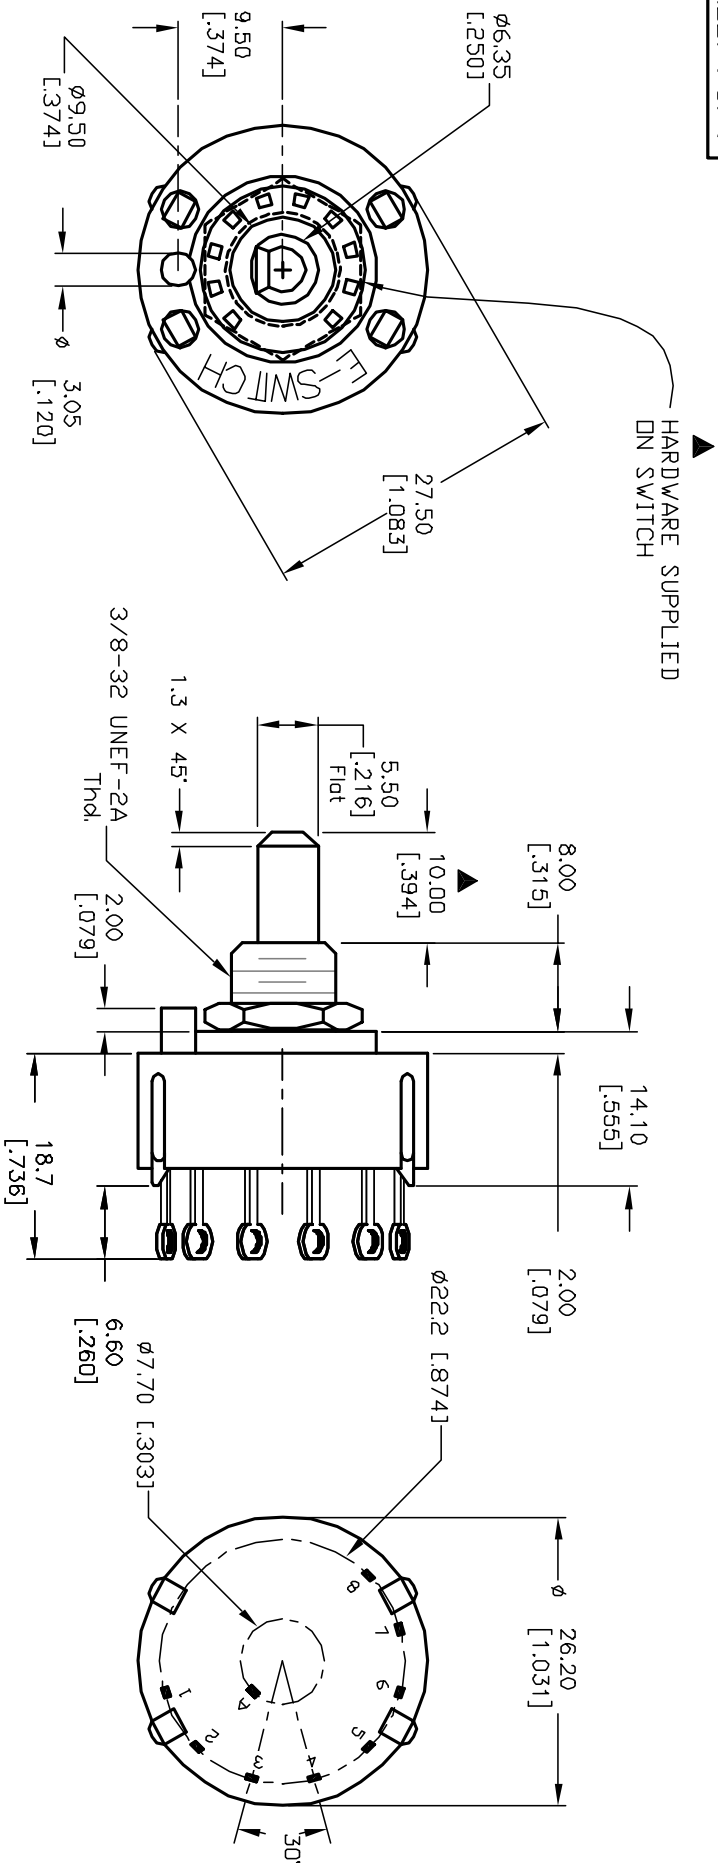

NOTES:

1. ALL DIMENSION IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
350mA, 110V AC/DD
 5. OPERATING FORCE: 425±100 CM/STANDARD
 6. OPERATING TEMP: -30° to 85°C
 7. CIRCUIT SP: 8 POSITIONS, 30° INDEX.
 8. DIELECTRIC STRENGTH: 1000V RMS min.@Sea Level
 9. TIMING: BBI (Non-Shorting) Break Before Make.
 10. HARDWARE SUPPLIED ON SWITCH - SEE BELOW
- STOP. RING, LOCKWASHER, & HEXNUT
11. ▲ DENOTES CRITICAL PARAMETER.

CONTACT CONFIGURATION
(SEE NOTE 10)

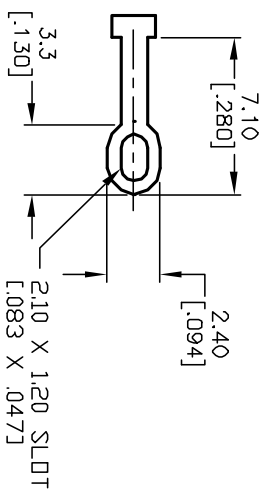

TERMINATION DETAIL
SCALE 2X

11. ▲ DENOTES CRITICAL PARAMETER.				E-SWITCH®			
TITLE				KC18A10.001NLS			
A		13083	RELEASED FOR PRODUCTION	4/24/03		AR	
REV.		ECN No.	DESCRIPTION	DATE		CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED							
SCALE		1.5:1		DATE		4/24/03	
DR		AR		DWG		G530158	
REV		A					