

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[LAKOAV11KGRNGRN](#)


For any questions, you can email us directly:
sales@integrated-circuit.com

SHEET 1 OF 1



Parts List				
ITEM	QTY	PART NUMBER	DESCRIPTION	
1	1	F060621	LAKOAV11	
2	1	F051601	P16 PLASTIC TERM. PROTECTOR	
3	1	F050422	24VDC GREEN LED	
4	1	F051702	25MM RING	
5	1	F061254	25MM GRN LENS	

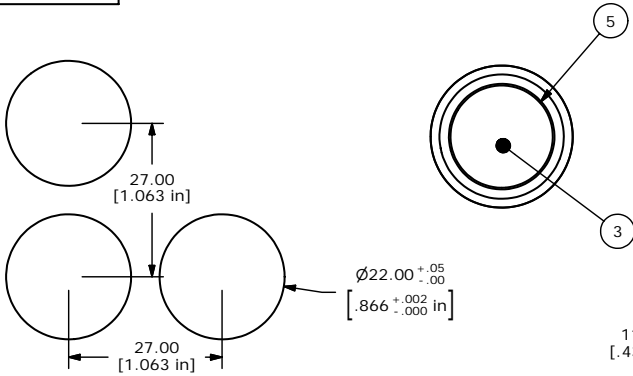


RECOMMEND PANEL MOUNTING



CONTACT CONFIGURATION

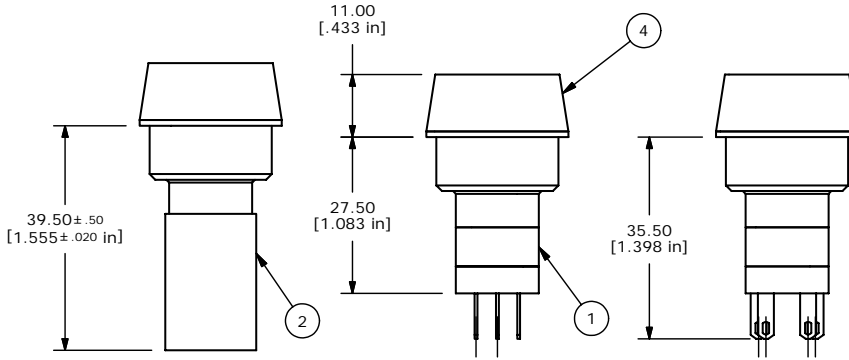

ISOMETRIC



- NOTES:
- ALL DIMENSIONS IN MM [INCH].
 - GENERAL TOLERANCE: 0.0 ± 0.4
 0.00 ± 0.25
 - TERM. NOS. FOR REF. ONLY.
 - RATING: 5A @250VAC
8A @125VAC
.2A @250VDC
6A @24VDC
 - ELECTRIC LIFE: 50,000 MAKE-OR-BREAK CYCLES AT FULL LOAD.
 - INSULATION: 1,000 MΩ MIN.
 - DIELECTRIC STRENGTH: 2000V FOR 1 MIN
 - OPERATING TEMP: -25°C TO 55°C
 - LENS COLOR: GREEN
 - LAMP VOLTAGE: 24VDC LED



B	16491	PUT IN MISSING LED ON SCHEMATIC	9/25/2006	TN
A	15664	RELEASED FOR PRODUCTION	1/10/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE LAKOAV11KGRNGRN				
SCALE 1:1	DATE 1/10/2006	DR PH	DWG XF0665P	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED