

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[PBH2UEENAG1DWHT](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET 1 OF 1



- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING 0.1A @30V DC

▲ 5. MATERIALS:

CONTACT/TERMINALS: SILVER PLATE
HOUSING: PBT UL94HB
BASE: PA66 UL94HB
ACTUATOR: POM
CAP: ABS UL94V0

6. CONTACT RESISTANCE: 100 MILLI-OHM (INITIAL) (C)

▲ 7. TIMING: NON-SHORTING

8. OPERATING FORCE: 230±50GF

9. TRAVEL: LATCHING

2MM TO LOCK



3MM OVERALL

10. ELECTRICAL LIFE: 10000 CYCLES


11. OPERATING TEMP: -20°C TO +70°C (C)

12. 2002/95/EC (ROHS) COMPLIANT (E)

13. ▲ DENOTES CRITICAL PARAMETER.

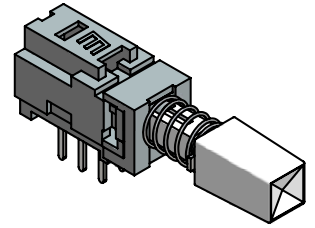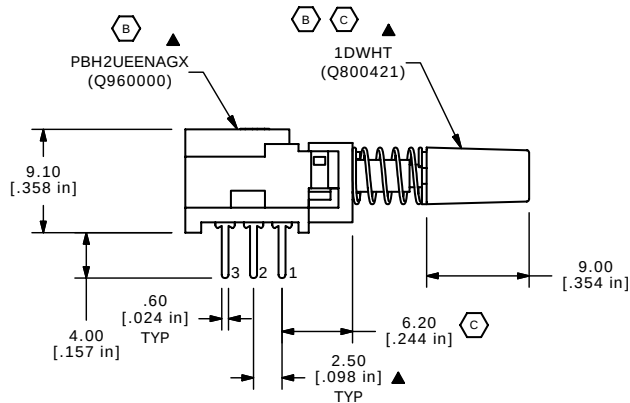

ISOMETRIC

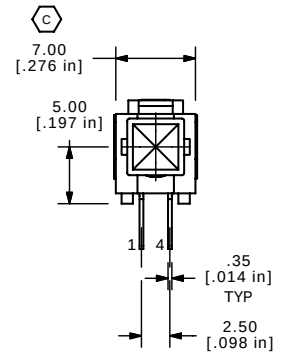

E	15943	ADD ROHS NOTE	4/4/06	BK
D	15260	REVISED CAP DESCRIPTION	9/8/05	PH
C	14893	CHANGED NOTES AND DIMENSIONS	5/3/05	JB
B	14790	ADD MATERIALS TO NOTES	3/29/05	AR
A	14691	RELEASED FOR PRODUCTION	2/14/05	AR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE PBH2UEENAG1DWHT

SCALE 2:1

DATE 02/14/05

DR AR

DWG XQ0003P

REV E