

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[R1966AWHTWHTIF](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

PANEL THICKNESS	X dimension
0.75-1.25 [0.30-.049]	19.2-.01 [7.56]
1.25-2.0 [0.49-.079]	19.4-.01 [7.64]
2.0-3.0 [0.79-.118]	19.8-.01 [7.80]







SWITCH FUNCTION	
POS. 1	POS. 2
DN	OFF
1-1a	DPEN



- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. RATING: 15A @ 125VAC OR
6A @ 250VAC
 5. MATERIALS: TERMINALS: SILVER PLATED COPPER ALLOY
CONTACTS: COIN SILVER, SILVER PLATED
 6. ELECTRIC LIFE: 10,000 CYCLES
 7. CONTACT RESISTANCE: <20 MEGA Ω
 8. INSULATION RESISTANCE: >1000 MEGA Ω
 9. DIELECTRIC STRENGTH: >1500 V 1 MINUTE
>3000 V BETWEEN POLES
 10. ▲ DENOTES CRITICAL PARAMETER.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	13370	RELEASED FOR PRODUCTION	8/14/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

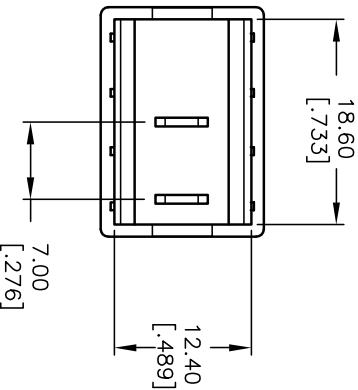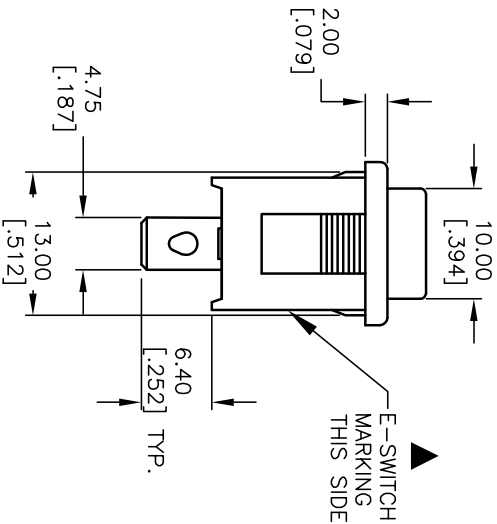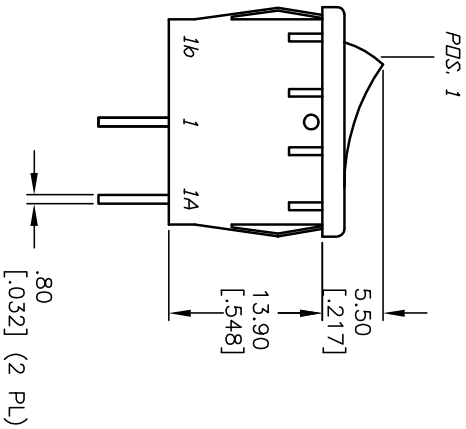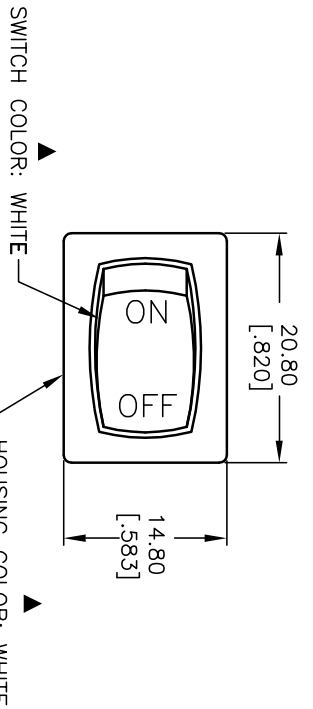

E-SWITCH®

TITLE: R1966AWHTWHTIF

SCALE	DATE	DR	DWG	REV
1.5:1	8/14/03	AR	M301235	A