

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[R1973ABLKBLKIF0](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

SHEET 1 OF 1





RECOMMENDED PANEL MOUNTING




PANEL THICKNESS	X
0.75-1.25	19.2-19.3
1.25-2.00	19.3-19.4
2.00-3.00	19.5-19.6



- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. RATING:
6A @250VAC; 9A @125VAC (UL, CSA, VDE)
 4. MATERIAL:
CONTACT SURFACE: COIN SILVER, SILVER PLATE
TERMINAL: COPPER ALLOY W/SILVER PLATE.
 5. CONTACT RESISTANCE: 20 mILLI-OHMS TYP. INITIAL
 6. INSULATION RESISTANCE: 1000 MEGA-OHMS
 7. DIELECTRIC STRENGTH:
>1500V RMS min. @SEA LEVEL
 8. MECHANICAL LIFE: 30,000 CYCLES.
 9. ELECTRICAL LIFE: 10,000 CYCLES
 10. ▲ DENOTES CRITICAL PARAMETER.
 11. 2002/95/EC (ROHS) COMPLIANT

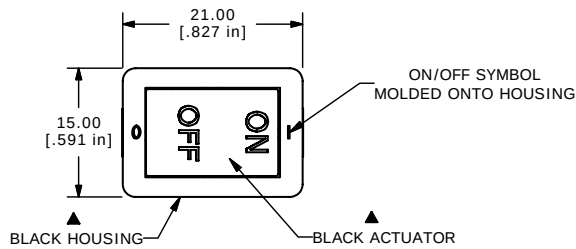

ISOMTRIC

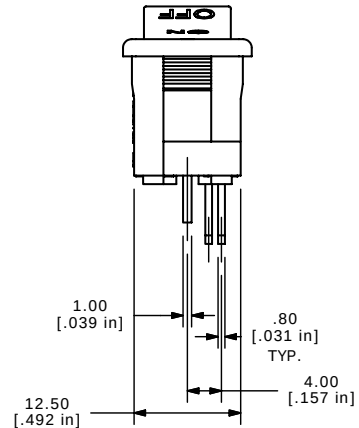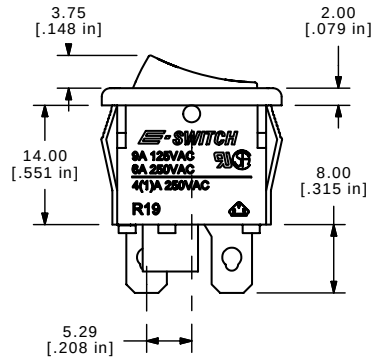

E-SWITCH®

TITLE R1973ABLKBLKIF0

A	15979	NEW PART RELEASE	4/24/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	1.5:1	DATE	4/24/2006	DR	CT	DWG	M400092	REV	A
-------	-------	------	-----------	----	----	-----	---------	-----	---