

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[R1973BBLKRILGF6](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

INCANDESCENT BULB

PARAMETERS	SYMBOL	MAX.	UNITS
LAMP VOLTAGE (AC/DC)	V	6	V
POWER DISSIPATION	P _D	2	Watts
CURRENT	I	200	mA

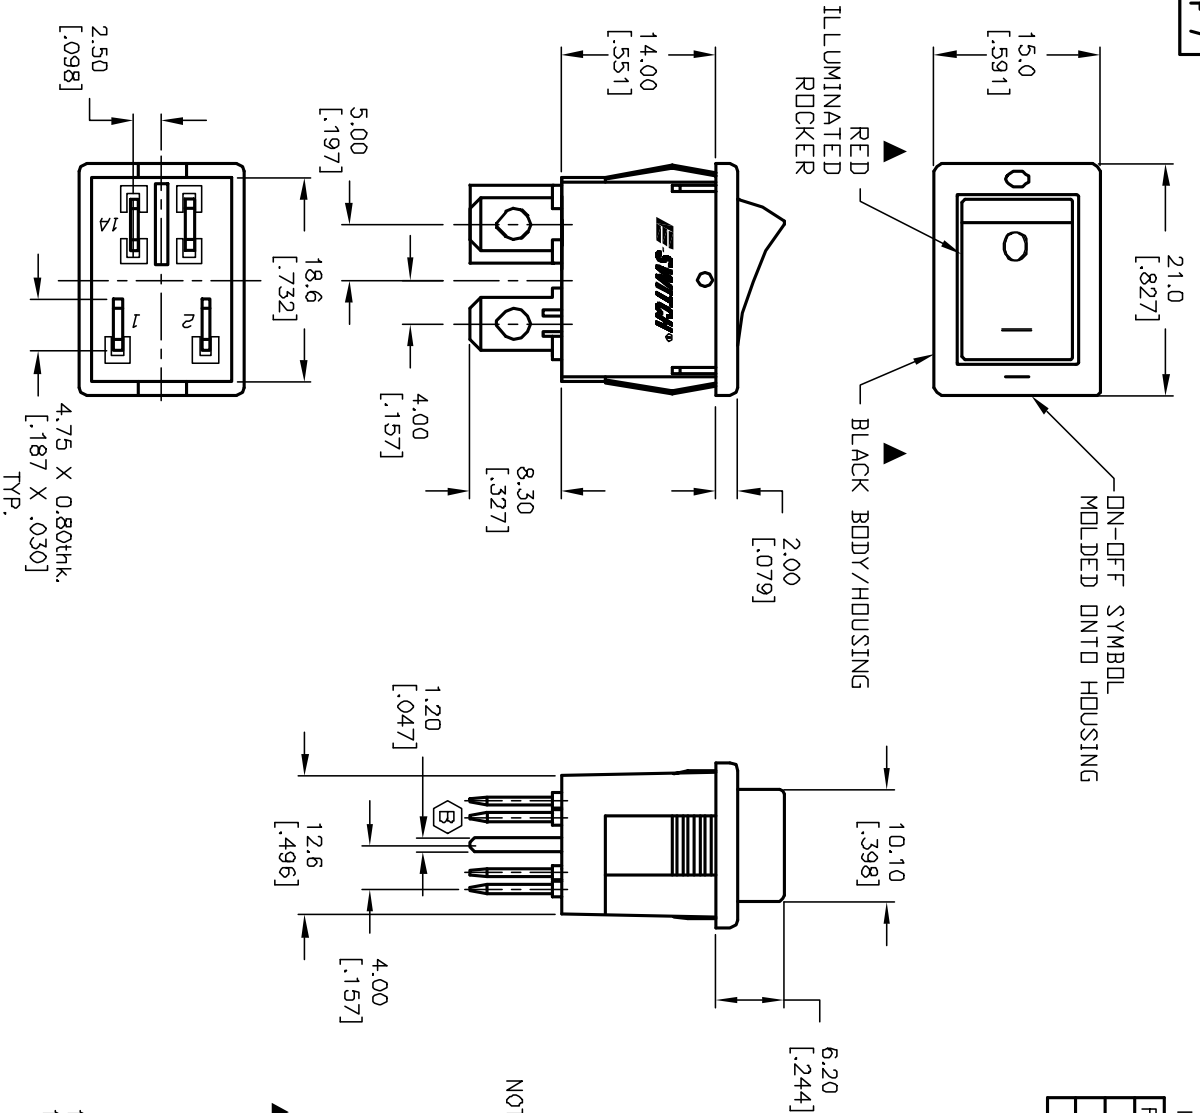

PANEL THICKNESS	X dimension
0.75-1.25 [0.30-0.49]	19.2-02 [0.7561]
1.25-2.0 [0.49-0.79]	19.4-02 [0.7641]
2.0-3.0 [0.79-1.18]	19.8-02 [0.7801]

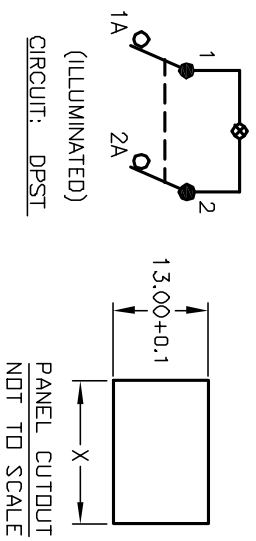

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 6A @250VAC;9A @125VAC (UL, CSA, VDE)
4(1)A @250VAC
4. LAMP VOLTAGE: 6VDC (INCANDESCENT BULB)
5. MATERIAL:
CONTACT SURFACE: Coin Silver, Silver Plate
TERMINAL: Copper Alloy W/ Silver Plate.
CONTACT RESISTANCE: 20mΩTYP. INITIAL
INSULATION RESISTANCE: 1000MΩTYP.
DIELECTRIC STRENGTH:
>1500V RMS min. @SEA LEVEL
>3000V RMS @SEA LEVEL
9. MECHANICAL LIFE: 50,000 CYCLES.
10. ELECTRICAL LIFE: 10,000 CYCLES.
11. ▲ DENOTES CRITICAL PARAMETER.

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
B	13068	ADD TERMINAL IN R. SIDE VIEW	4/22/03	AR
A	13064	RELEASED FOR PRODUCTION	4/21/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE	SCALE	DATE	DR	DWG	REV
R1973BBLKRLGF6	2:1	4/21/03	AR	M400071	B

E-SWITCH®