

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[R4JBLKRILEF3](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




SHEET 1 OF 1



RECOMMENDED PANEL MOUNTING



| PANEL THICKNESS | X± 0.05 |
|-----------------|-------------|
| 0.75-1.25 | 29.6-29.7 |
| 1.25-2.00 | 30.1-30.2 |
| 2.00-3.00 | 30.45-30.55 |

| SWITCH FUNCTION | |
|-----------------|--------|
| POS. 1 | POS. 2 |
| | |
| ON | OFF |
| 1-1a | OPEN |

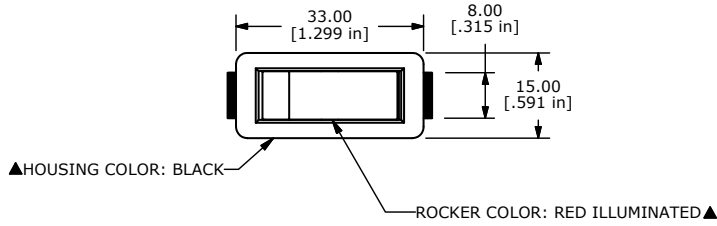

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 20A 125VAC, 16A 250VAC UL APPROVED 16A 250VAC VDE APPROVED
- ELECTRICAL LIFE: OVER 10,000 CYCLES
- MECHANICAL LIFE: OVER 30,000 CYCLES
- CONTACT RESISTANCE: <20 mΩ(INITIAL)
- DIELECTRIC STRENGTH: >1500V 1 min
- INSULATION RESISTANCE: >1,000 mΩ @ 500V DC
- LAMP VOLTAGE: 12VDC INCANDESCENT
- OPERATING TEMPERATURE: TERMINAL SIDE -20°C to 85°C
ROCKER SIDE -20°C to 55°C
- ▲DENOTES CRITICAL PARAMETER
- 2002/95/EC (ROHS) COMPLIANT

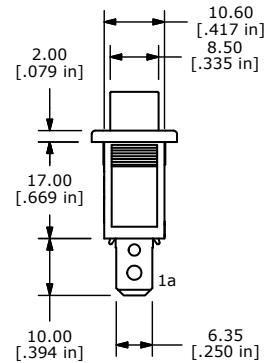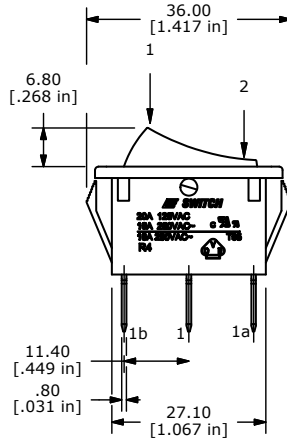

| B | 19898 | UPDATE DRAWING | 04/29/11 | BMA |
|-----|--------|-------------------------|----------|-----|
| A | 16944 | RELEASED FOR PRODUCTION | 01/31/07 | TN |
| REV | PCR NO | DESCRIPTION | DATE | BY |

| | | | | |
|--------------------|----------------|-------|-------------|-------|
| TITLE R4JBLKRILEF3 | | | | |
| SCALE 1:1 | DATE 1/31/2007 | DR PH | DWG M041004 | REV B |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED