

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[R6ABLKREDAF](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

SHEET 1 OF 1






RECOMMENDED P.C.B. PANEL MOUNTING



PANEL THICKNESS	X
0.75-1.25	19.2-19.3
1.25-2.00	19.25-19.35
2.00-3.00	19.3-19.4



HOUSING COLOR: BLACK ▲

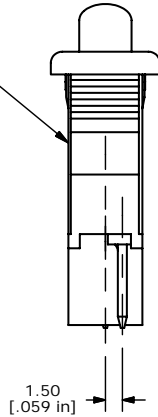

ACTUATOR COLOR: RED ▲

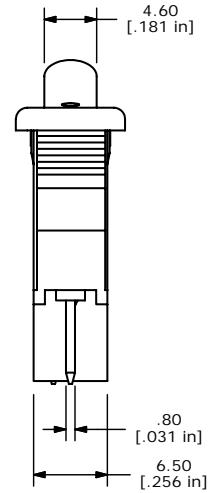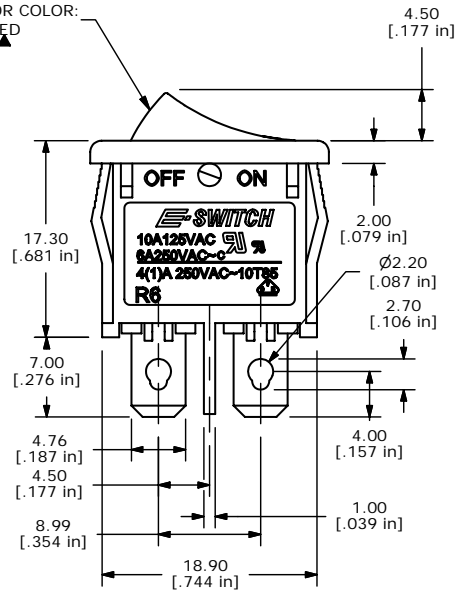

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 6A @ 250VAC
 5. MATERIAL: BODY & ROCKER, NYLON 6/6 UL94 V-2
 6. CONTACT RESISTANCE: 20 MILLI-OHMS
 7. ELECTRICAL LIFE: 10,000 CYCLES
 8. DIELECTRIC STRENGTH: 1,500V FOR 1 MIN
 9. ▲ DENOTES CRITICAL PARAMETER.
 10. 2002/95/EC (ROHS) COMPLIANT



REV	PCR NO	DESCRIPTION	DATE	BY
B	15821	ADD ROHS, REMOVE DEM, SEM NEM, FI	2/27/06	PH
A	15565	RELEASED FOR PRODUCTION	11/30/05	PH

E-SWITCH®				
TITLE R6ABLKREDAF				
SCALE 2:1	DATE 11/30/2005	DR PH	DWG M060303	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED