

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)  
[R6BBLKBLKFF](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

SHEET OF

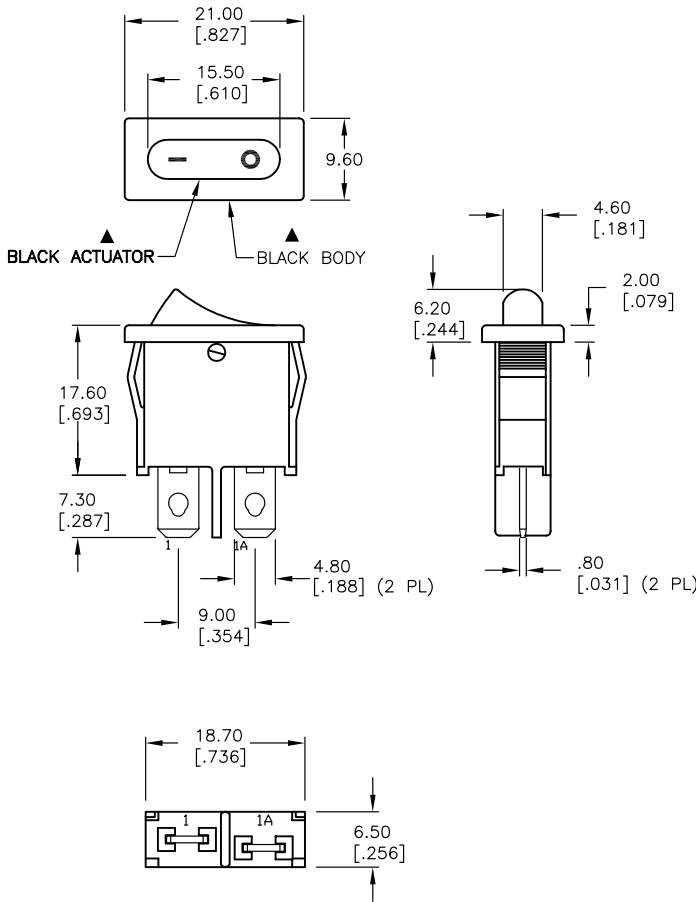


PANEL THICKNESS	X dimension
0.75-1.25 [.030-.049]	19.2-0.1 [.756]
1.25-2.0 [.049-.079]	19.4-0.1 [.764]
2.0-3.0 [.079-.118]	19.8-0.1 [.780]

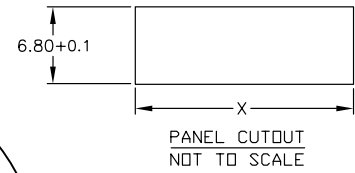

SWITCH FUNCTION	
POS. 1	POS. 2
<ON>	OFF
1-1a	OPEN

< >=Momentary



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4; X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 4(1)A @250VAC, 6A @250VAC, 10A @125VAC
5. MATERIALS: TERMINALS: COPPER ALLOY W/SILVER PLATING  
CONTACTS: COIN SILVER
6. MECHANICAL LIFE: >50,000 CYCLES
7. ELECTRICAL LIFE: >10,000 CYCLES
8. CONTACT RESISTANCE: < 20 milli-OHMS (INITIAL)
9. INSULATION RESISTANCE: > 1000 MEGA-OHMS @ 500VDC
10. DIELECTRIC STRENGTH: >1500VAC 1 MINUTE (INITIAL)  
>3000V BETWEEN POLES
11. ▲ DENOTES CRITICAL PARAMETER.

**E-SWITCH®**

TITLE				
R6BBLKBLKFF				
SCALE	DATE	DR	DWG	REV
1.5:1	11/5/03	AR	M060355	A

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	13578	RELEASED FOR PRODUCTION	11/5/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED