

## Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)  
[TL1105TF160R](#)




For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

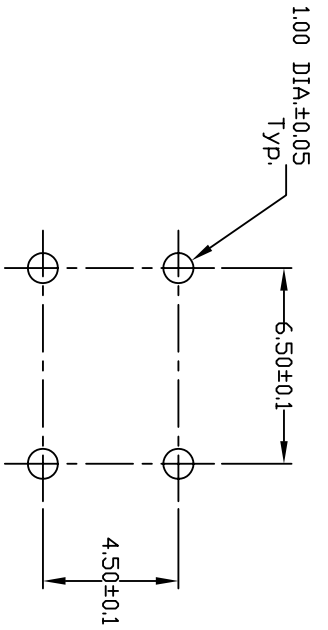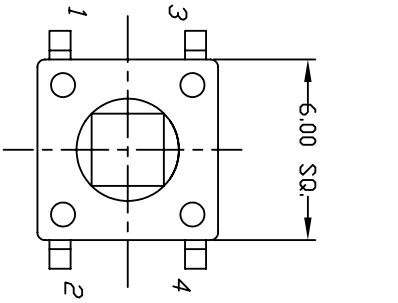

RECOMMEND P.C.B. LAYOUT

- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: 0.0=±0.4  
0.00=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. RATING: 50mA, @12V DC
  5. TRAVEL: 0.25±0.1mm
  6. OPERATING FORCE: 160±50gf
  7. CONTACT RESISTANCE: 100 milliohms Max.
  8. ELECTRICAL LIFE: 100,000 CYCLES MIN.
  9. MATERIAL: GOLD
  10. ▲ DENOTES CRITICAL PARAMETER.

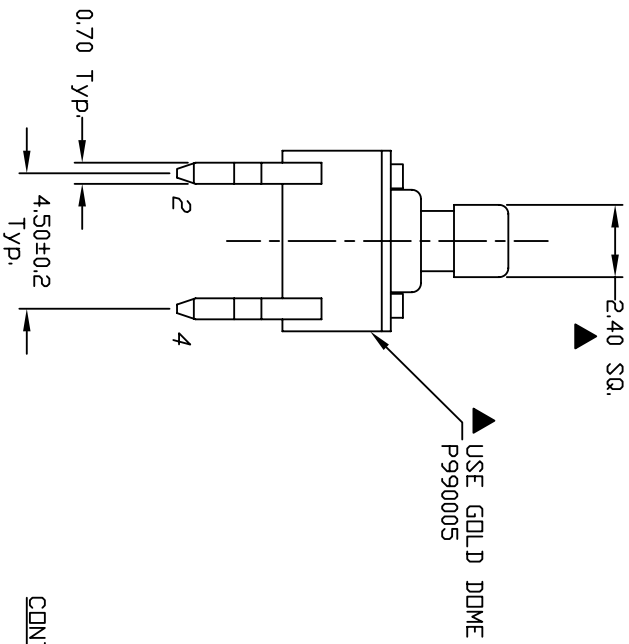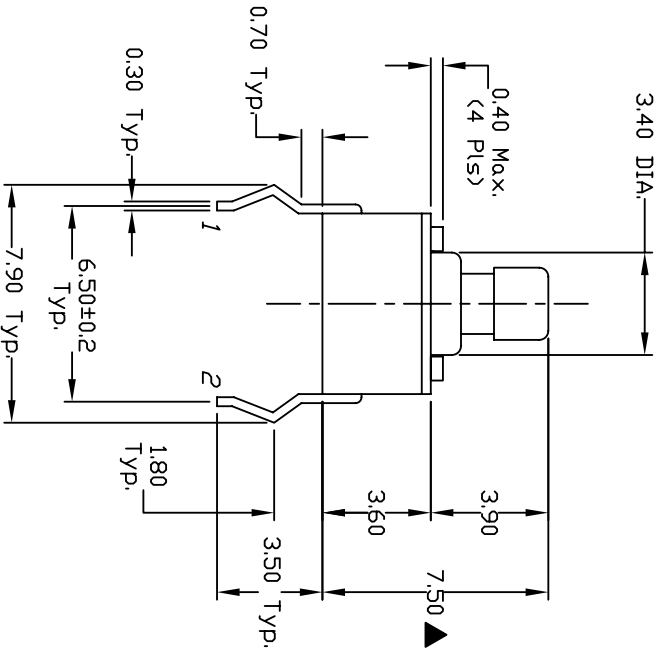

CIRCUIT: SPST  
CONTACT CONFIGURATION

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	16089	ADD GOLD DOME NOTE	6/5/06	CT
A	13726	RELEASED FOR PRODUCTION	1/21/04	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

**E-SWITCH®**

TL 1105 T F160 R

TITLE	SCALE	DATE	DR	DWG	REV
TL 1105 T F160 R	4:1	1/21/04	AR	P010229	B