

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Crouzet](#)
[PB-24MD](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

DIGITAL I/O MODULE MOUNTING BOARDS


FOR "M" SERIES MINIATURE MODULES

PB24MD

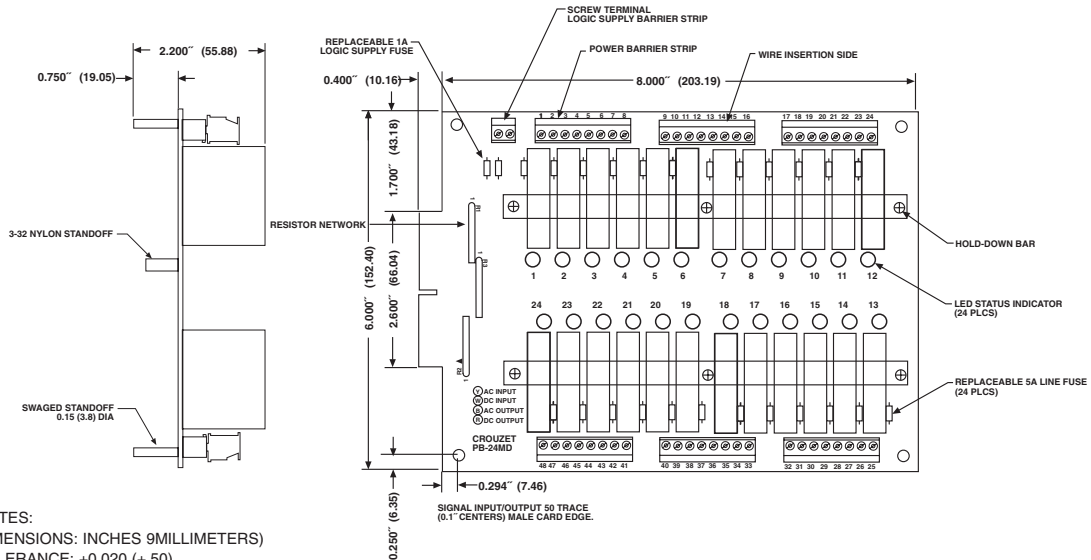

NOTES:
 DIMENSIONS: INCHES 9MILLIMETERS
 TOLERANCE: +0.020 (+.50)

- NOTES: 1) MATING CONNECTOR IS BERG66317-150 OR EQUIVALENT. SPECIFY SUFFIX 'C' FOR OPTIONAL 65823-093 OR EQUIVALENT MALE PIN CONNECTOR FOR PARALLEL-TO-THE-BOARD CABLE CONNECTION. SPECIFY SUFFIX 'V' FOR OPTIONAL CIRCUIT ASSEMBLY CA-50H-2B-SR OR EQUIVALENT MALE PIN CONNECTOR FOR PERPENDICULAR-TO-THE-BOARD CABLE CONNECTION.
 2) 4-40 TERMINAL STRIPS ACCEPT WIRE SIZES FROM 26 TO 14 AWG.
 3) OPTIONAL JUMPERS ARE AVAILABLE TO INTERCONNECT BARRIER STRIP ORDER "JM8"
 4) PHOENIX MKDS1.5 5.08mm SERIES (OR EQUIVALENT) SCREW TERMINAL BLOCKS STANDARD. SPECIFY SUFFIX "A" FOR BOARD-MOUNTED PHOENIX MSTBVA 1.5/16-G-5.08 (OR EQUIVALENT) MALE CONNECTOR. SPECIFY SUFFIX "B" FOR BOARD-MOUNTED PHOENIX MSTBVA 1.5/16-G-5.08 (OR EQUIVALENT) MALE CONNECTOR AND MATING PHOENIX MSTBVA 1.5/16-ST-5.08 (OR EQUIVALENT) FEMALE. SCREW-TERMINAL PLUG-IN CONNECTOR.
 5) LITTLE FUSE 251001 OR EQUIVALENT.
 6) LITTLE FUSE 251005 OR EQUIVALENT.

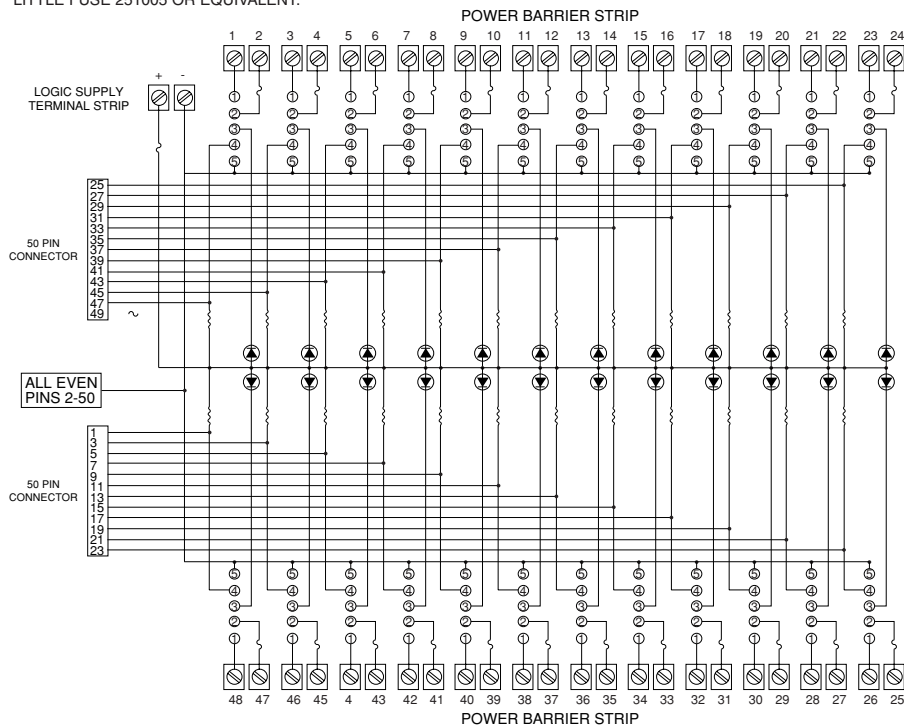

Products and specifications subject to change without notice.
 Consult factory for application assistance.