

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Laird - Embedded Wireless Solutions](#)
[1300-00023](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

Mechanical Properties:

Connectors: Right Angle MMCX Plug
 Johnson p/n 135-3403-101
 Reverse Polarity SMA Jack
 Johnson p/n 142-4303-401
 Cable: Coax, RG-316/U
 Operation Temp: -20°C to +65°C
 Storage Temp: -30°C to +75°C

Electrical Properties:

Freq Range: 2.4~2.5 GHz
 Impedence: 50 ohm nominal
 VSWR: <2.0:1

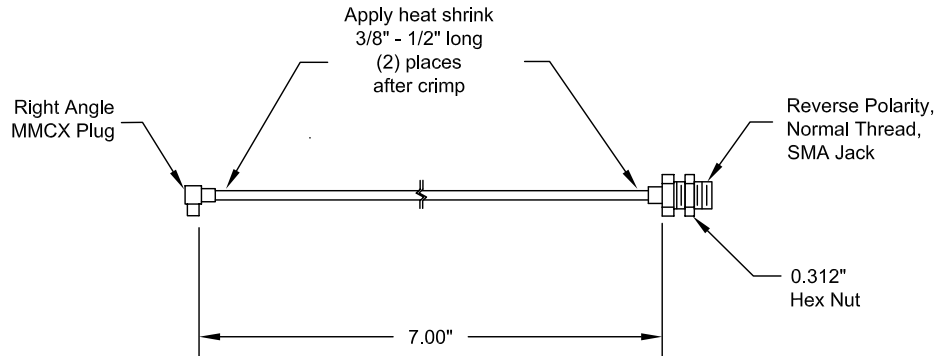

DEVICE USED ON	REQ D	MATERIAL	SIZE	SCALE	UNLESS OTHERWISE SPECIFIED.	Phone: 800-492-2320 Fax: 913-492-1243 e-mail: www.aerocomm.com
		FINISH	A	1=1	TOLERANCES: .XX ±0.01 .XXX ±0.005 ANGLES +1°	
DRAWN BY	THE	DATE	REV	SHEET		
		12-20-2005	0	1/1		
CHECKED BY		DATE	DWG. NO.	TITLE		
APPROVED BY		DATE	1300-00023	Cable Assembly Coax, MMCX Right Angle Plug to Reverse Polarity SMA Jack		