



Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TE Connectivity AMP Connectors](#)
[3-641232-2](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

1

2

3






4

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	CM 00	DIST	00	REV	UNK	DATE	15JUN07	REV	UNK
DESCRIPTION		ECO-07-012870		S				KW	DB

REV	DESCRIPTION	DATE	BY	CHK
24	5-641232-4			
23	5-641232-3			
22	5-641232-2			
21	5-641232-1			
20	5-641232-0			
19	4-641232-9			
18	4-641232-8			
17	4-641232-7			
16	4-641232-6			
15	4-641232-5			
14	4-641232-4			
13	4-641232-3			
12	4-641232-2			
11	4-641232-1			
10	4-641232-0			
9	3-641232-9			
8	3-641232-8			
7	3-641232-7			
6	3-641232-6			
5	3-641232-5			
4	3-641232-4			
3	3-641232-3			
2	3-641232-2			
24	2-641232-4			
23	2-641232-3			
22	2-641232-2			
21	2-641232-1			
20	2-641232-0			
19	1-641232-9			
18	1-641232-8			
17	1-641232-7			
16	1-641232-6			
15	1-641232-5			
14	1-641232-4			
13	1-641232-3			
12	1-641232-2			
11	1-641232-1			
10	1-641232-0			
9	641232-9			
8	641232-8			
7	641232-7			
6	641232-6			
5	641232-5			
4	641232-4			
3	641232-3			
2	641232-2			

DIM	A	NO OF CIRCUITS	PART NO
95.10	[3.744]	24	
91.14	[3.588]	23	
87.17	[3.432]	22	
83.21	[3.276]	21	
79.25	[3.120]	20	
75.29	[2.964]	19	
71.32	[2.808]	18	
67.36	[2.652]	17	
63.40	[2.496]	16	
59.44	[2.340]	15	
55.47	[2.184]	14	
51.51	[2.028]	13	
47.55	[1.872]	12	
43.59	[1.716]	11	
39.62	[1.560]	10	
35.66	[1.404]	9	
31.70	[1.248]	8	
27.74	[1.092]	7	
23.77	[.936]	6	
19.81	[.780]	5	
15.85	[.624]	4	
11.89	[.468]	3	
7.92	[.312]	2	
95.10	[3.744]	24	
91.14	[3.588]	23	
87.17	[3.432]	22	
83.21	[3.276]	21	
79.25	[3.120]	20	
75.29	[2.964]	19	
71.32	[2.808]	18	
67.36	[2.652]	17	
63.40	[2.496]	16	
59.44	[2.340]	15	
55.47	[2.184]	14	
51.51	[2.028]	13	
47.55	[1.872]	12	
43.59	[1.716]	11	
39.62	[1.560]	10	
35.66	[1.404]	9	
31.70	[1.248]	8	
27.74	[1.092]	7	
23.77	[.936]	6	
19.81	[.780]	5	
15.85	[.624]	4	
11.89	[.468]	3	
7.92	[.312]	2	

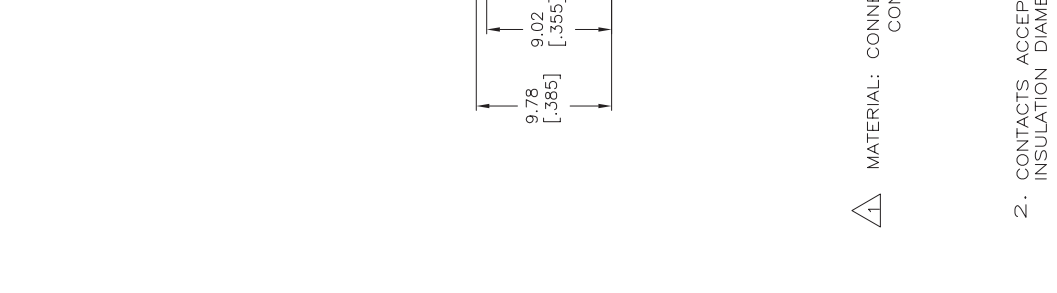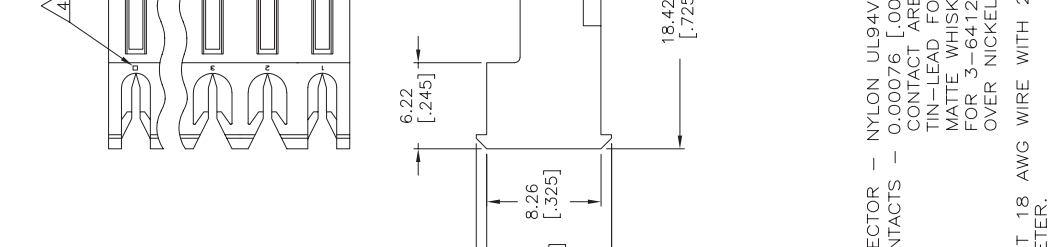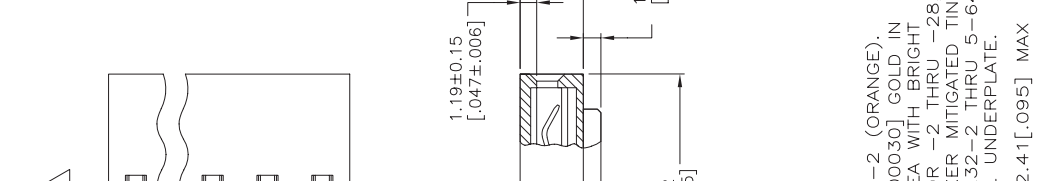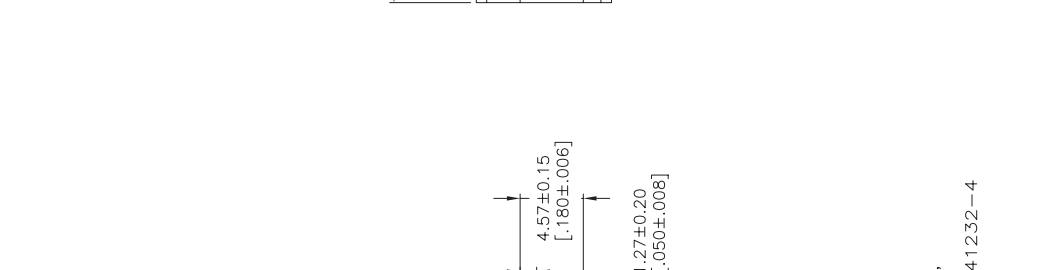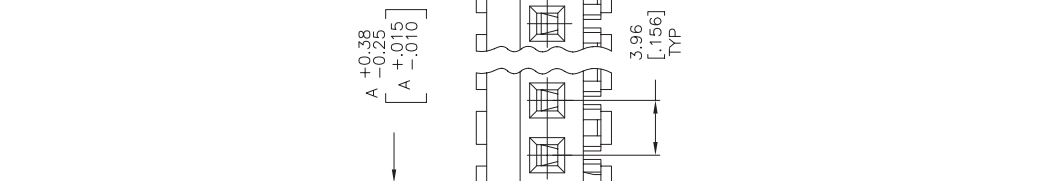

1. MATERIAL: CONNECTOR - NYLON UL94V-2 (ORANGE). CONTACTS - 0.00076 [.000030] GOLD IN CONTACT AREA WITH BRIGHT TIN-LEAD FOR -2 THRU -28; MATTE WHISKER MITIGATED TIN FOR 3-641232-2 THRU 5-641232-4 OVER NICKEL UNDERPLATE.
2. CONTACTS ACCEPT 18 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
3. CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
4. IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
5. DIMENSIONS IN BRACKETS ARE IN INCHES.
6. HOUSING FEATURES ARE: FEED-THRU WITHOUT LOCKING RAMP.

OWN	LEWIS	12 FEB 91	TYPE ELECTRONICS	TYCO ELECTRONICS CORPORATION
CHK	SWING	12 FEB 91	HARRISBURG, PA 17105-3608	
APP	D. CLARK	20 FEB 91	NAME	MTA-156 CONNECTOR ASSEMBLY,
PRODUCT SPEC			SIZE	18 AWG, STANDARD
			SIZE	108-1051
			APPLICATION SPEC	
			WEIGHT	114-1020
				A2 00779 C=641232
				RESTRICTED TO
				SCALE: 4:1
				SHEET 1 OF 1
				REV. S

THIS DRAWING IS A CONTROLLED DOCUMENT.	
TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 F.C.	±
1 F.C.	±
2 F.C.	±
3 F.C.	±
4 F.C.	±
5 F.C.	±
6 F.C.	±
7 F.C.	±
8 F.C.	±
9 F.C.	±
10 F.C.	±
11 F.C.	±
12 F.C.	±
13 F.C.	±
14 F.C.	±
15 F.C.	±
16 F.C.	±
17 F.C.	±
18 F.C.	±
19 F.C.	±
20 F.C.	±
21 F.C.	±
22 F.C.	±
23 F.C.	±
24 F.C.	±
25 F.C.	±
26 F.C.	±
27 F.C.	±
28 F.C.	±
29 F.C.	±
30 F.C.	±
31 F.C.	±
32 F.C.	±
33 F.C.	±
34 F.C.	±
35 F.C.	±
36 F.C.	±
37 F.C.	±
38 F.C.	±
39 F.C.	±
40 F.C.	±
41 F.C.	±
42 F.C.	±
43 F.C.	±
44 F.C.	±
45 F.C.	±
46 F.C.	±
47 F.C.	±
48 F.C.	±
49 F.C.	±
50 F.C.	±
51 F.C.	±
52 F.C.	±
53 F.C.	±
54 F.C.	±
55 F.C.	±
56 F.C.	±
57 F.C.	±
58 F.C.	±
59 F.C.	±
60 F.C.	±
61 F.C.	±
62 F.C.	±
63 F.C.	±
64 F.C.	±
65 F.C.	±
66 F.C.	±
67 F.C.	±
68 F.C.	±
69 F.C.	±
70 F.C.	±
71 F.C.	±
72 F.C.	±
73 F.C.	±
74 F.C.	±
75 F.C.	±
76 F.C.	±
77 F.C.	±
78 F.C.	±
79 F.C.	±
80 F.C.	±
81 F.C.	±
82 F.C.	±
83 F.C.	±
84 F.C.	±
85 F.C.	±
86 F.C.	±
87 F.C.	±
88 F.C.	±
89 F.C.	±
90 F.C.	±
91 F.C.	±
92 F.C.	±
93 F.C.	±
94 F.C.	±
95 F.C.	±
96 F.C.	±
97 F.C.	±
98 F.C.	±
99 F.C.	±
100 F.C.	±

