

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[TL3315NF100Q](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



E-SWITCH™

SERIES TL3315 SWITCHES

TACT SWITCHES SMT - LOW PROFILE

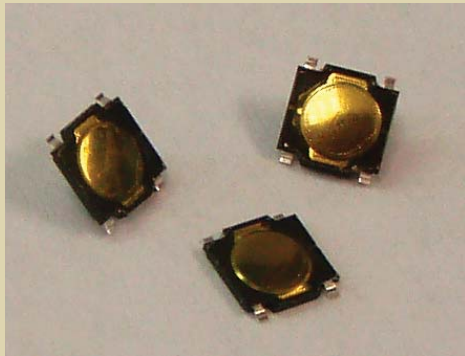

FEATURES & BENEFITS

Very low profile
 Surface Mount

APPLICATIONS / MARKETS

Consumer Electronics
 Audio/visual
 Medical
 Testing/Instrumentation
 Telecommunications
 Computer/Servers/Peripherals

MECHANICAL SPECIFICATIONS

Force:	100 +/- 30 gf; 160 +/- 50 gf; 250 +/- 50 gf
Travel:	0.20mm

ELECTRICAL SPECIFICATIONS

Electrical Life:	1,000,000 cycles - 100 gf 500,000 cycles - 160 gf 200,000 cycles - 250 gf
Contact Rating:	50mA @ 15VDC
Contact Resistance:	200mΩ (initial max)
Insulation Resistance:	50MΩ (Min @ 100VDC)
Dielectric Strength:	250VAC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-20°C to +70°C
Storage Temperature:	-25°C to +80°C

HOW TO ORDER:

