

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[PJ008-4P4C2-K](#)




For any questions, you can email us directly:
sales@integrated-circuit.com

Series: PJ008

❖ Color - Gray


Series option:

H = Shorting bar (available only on 8 position)

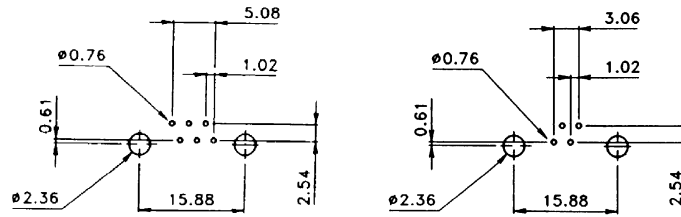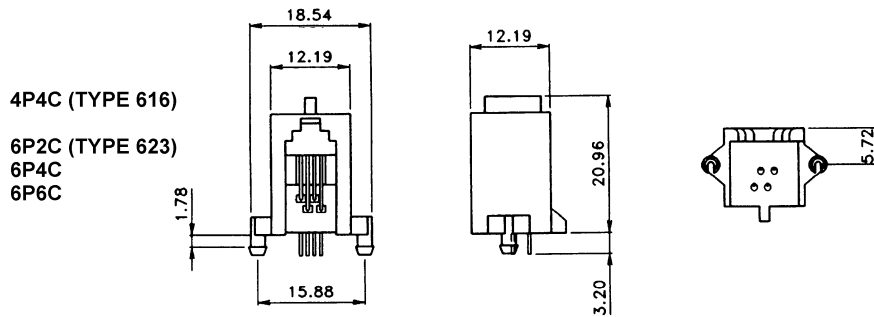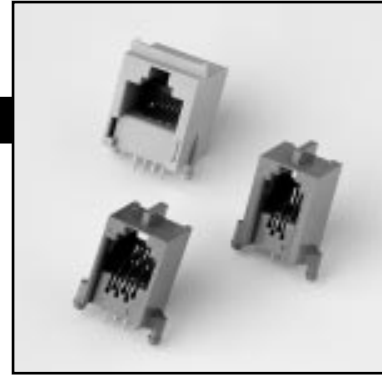

PC Board Layout

PC Board Layout

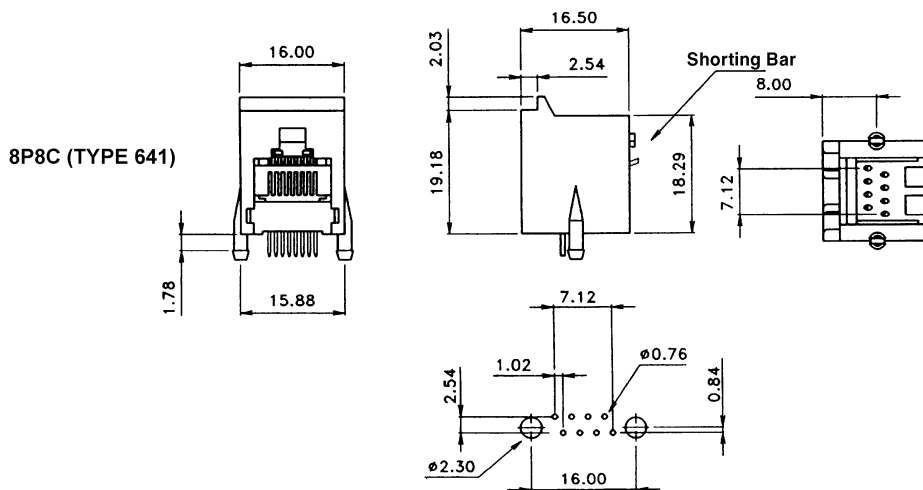

PC Board Layout

Specifications

Phone Jack Series:

PJ

Ratings:

Current	1.5A
Dielectric strength	1000V RMS for 1 minute
Contact resistance	20mΩ max.
Insulation resistance	500MΩ min.
Spring wire durability	500 mating cycles min.
Operating temperature	-25°C / +90°C

Material:

Plastic	PBT, Glass-filled UL94V-0
Color	Black
Spring wire	0.45mm Dia., Phosphor Bronze Gold plated over Nickel

ORDERING PROCEDURE

 1 - 2 3 4 - 5

1) Series

2) Number of Positions (# P)

3) Number of Contacts (# C)

4) Plating:

1 = Full Flash Gold

2 = Full 10μ Gold

3 = Full 30μ Gold

4 = Full 50μ Gold

5) Series options:

B = Ferrite Bead (only available on PJ031)

F = Flanged

S = Shield

K = Keyed

H = Shorting Bar (available only on PJ008, 8 position)