

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Kingbright](#)
[AA3529SES/L](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Kingbright

3.5x2.8 mm SMD CHIP LED LAMP

PRELIMINARY SPEC

Part Number: AA3529SES/L Hyper Orange


Features

- Single color.
- Suitable for all SMT assembly and solder process.
- Available on tape and reel.
- Ideal for backlighting.
- White SMD package, silicone resin.
- Low thermal resistance.
- Package: 1500pcs / reel.
- Moisture sensitivity level : level 2a.
- RoHS compliant.

Description

The Red-orange device is made with TS AlInGaP light emitting diode.

Package Dimensions

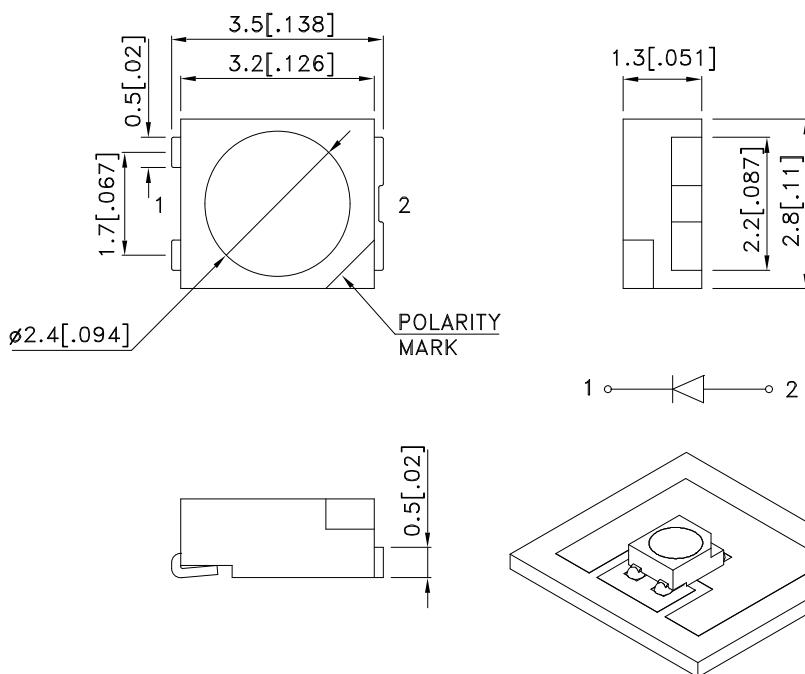

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
3. Specifications are subject to change without notice.
4. The device has a single mounting surface. The device must be mounted according to the specifications.




Kingbright

Handling Precautions



Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force.

As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might leads to damage and premature failure of the LED.


1. Handle the component along the side surfaces by using forceps or appropriate tools.




2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.



3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.



4. The outer diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.



Kingbright

Selection Guide

Part No.	Dice	Lens Type	I _v (mcd) [2] @ 150mA		Φ _v (mlm) [2] @ 150mA		Viewing Angle [1]
			Min.	Typ.	Min.	Typ.	
AA3529SES/L	Hyper Orange (AlInGaP)	WATER CLEAR	3800	6000	2500	4000	120°

Notes:

1. 01/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
2. Luminous intensity / luminous flux: +/-15%.

Absolute Maximum Ratings at T_A=25°C

Parameter	Symbol	Value	Unit
Power Dissipation	P _t	615	mW
Junction Temperature [1]	T _J	110	°C
Operating Temperature	T _{op}	-40 To +85	°C
Storage Temperature	T _{stg}	-40 To +85	°C
DC Forward Current [1]	I _F	150	mA
Peak Forward Current [2]	I _{FM}	350	mA
Thermal Resistance [1] (Junction/ambient)	R _{th j-a}	200	°C/W
Thermal Resistance [1] (Junction/solder point)	R _{th j-s}	80	°C/W

Notes:

1. Results from mounting on PC board FR4(pad size \geq 70mm²), mounted on pc board-metal core PCB is recommend for lowest thermal Resistance.
- 2.1/10 Duty Cycle, 0.1ms Pulse Width.

Electrical / Optical Characteristics at T_A=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ _{peak}	Peak Wavelength	Hyper Orange	626		nm	I _F =150mA
λ _D [1]	Dominant Wavelength	Hyper Orange	618		nm	I _F =150mA
Δλ _{1/2}	Spectral Line Half-width	Hyper Orange	20		nm	I _F =150mA
C	Capacitance	Hyper Orange	25		pF	V _F =0V;f=1MHz
V _F [2]	Forward Voltage	Hyper Orange	3.6	4.1	V	I _F =150mA
I _R	Reverse Current	Hyper Orange		10	uA	V _R = 5V







Notes:

1. Wavelength: +/-1nm.
2. Forward Voltage: +/-0.1V.

Kingbright

Hyper Orange

AA3529SES/L

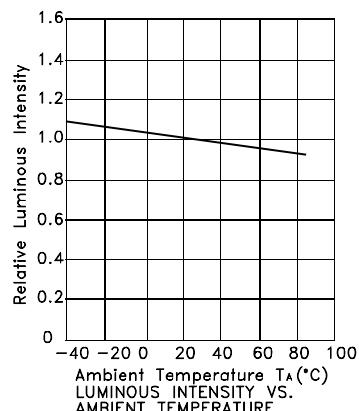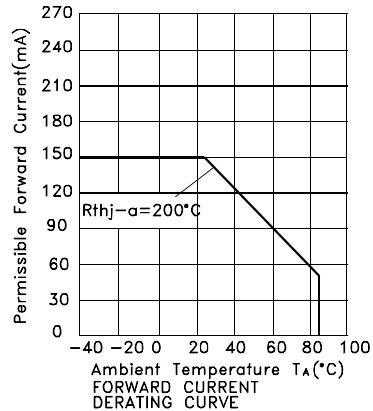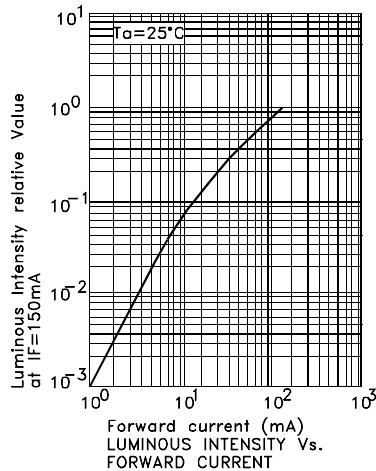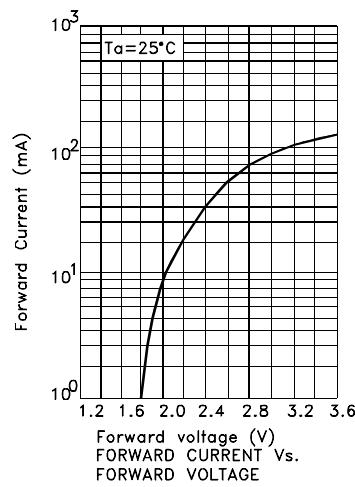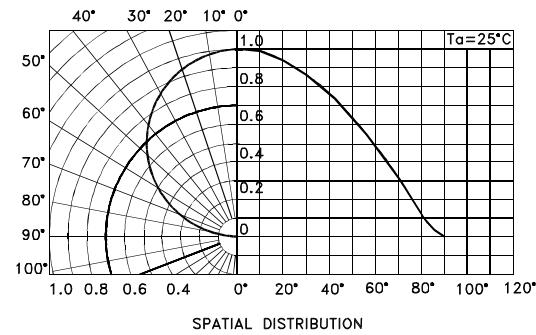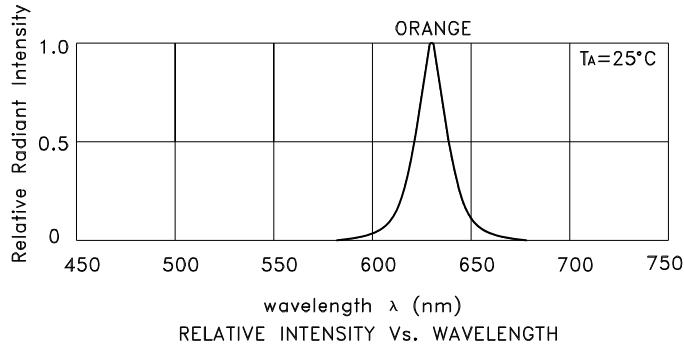


Kingbright

AA3529SES/L

Reflow soldering is recommended and the soldering profile is shown below.
Other soldering methods are not recommended as they might cause damage to the product.

Reflow Soldering Profile For Lead-free SMT Process.

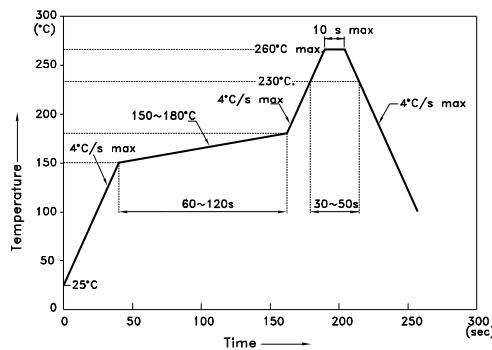


NOTES:

1. We recommend the reflow temperature 245°C ($\pm 5^{\circ}\text{C}$). The maximum soldering temperature should be limited to 260°C .
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

Recommended Soldering Pattern


(Units : mm; Tolerance: ± 0.1)

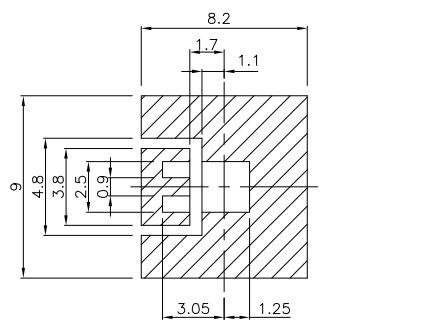

□ Solder Mask

Tape Specifications

(Units : mm)

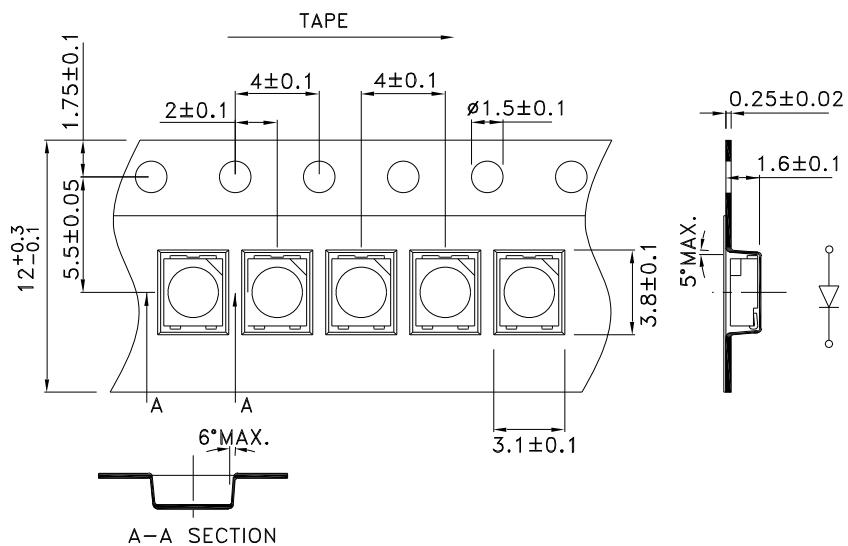

Kingbright

PACKING & LABEL SPECIFICATIONS

AA3529SES/L

