

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ON Semiconductor](#)
[NTGD3149CT1G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NTGD3149C

Power MOSFET

Complementary, 20 V, +3.5/-2.7 A,
 TSOP-6 Dual

Features

- Complementary N-Channel and P-Channel MOSFET
- Small Size (3 x 3 mm) Dual TSOP-6 Package
- Leading Edge Trench Technology for Low On Resistance
- Reduced Gate Charge to Improve Switching Response
- Independently Connected Devices to Provide Design Flexibility
- This is a Pb-Free Device

Applications

- DC-DC Conversion Circuits
- Load/Power Switching with Level Shift

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain-to-Source Voltage		V _{DSS}	20	V
Gate-to-Source Voltage (N-Ch & P-Ch)		V _{GS}	±8	V
N-Channel Continuous Drain Current (Note 1)	Steady State T _A = 25°C T _A = 85°C	I _D	3.2 2.3	A
	t ≤ 5 s T _A = 25°C		3.5	
P-Channel Continuous Drain Current (Note 1)	Steady State T _A = 25°C T _A = 85°C	I _D	2.4 1.7	A
	t ≤ 5 s T _A = 25°C		2.7	
Power Dissipation (Note 1)	Steady State T _A = 25°C	P _D	0.9	W
	t ≤ 5 s		1.1	
Pulsed Drain Current	N-Ch	I _{DM}	11	A
	P-Ch		8.0	
Operating Junction and Storage Temperature		T _J , T _{STG}	-55 to 150	°C
Source Current (Body Diode)		I _S	0.8	A
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)		T _L	260	°C

THERMAL RESISTANCE RATINGS

Parameter	Symbol	Value	Unit
Junction-to-Ambient - Steady State (Note 1)	R _{θJA}	140	°C/W
Junction-to-Ambient - t ≤ 5 s (Note 1)	R _{θJA}	110	°C/W

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.


1. Surface Mounted on FR4 Board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces).



ON Semiconductor®

<http://onsemi.com>

V _{(BR)DSS}	R _{DS(on)} MAX	I _D MAX (Note 1)
N-Ch 20 V	60 mΩ @ 4.5 V	3.5 A
	90 mΩ @ 2.5 V	
P-Ch -20 V	110 mΩ @ 4.5 V	-2.7 A
	145 mΩ @ 2.5 V	

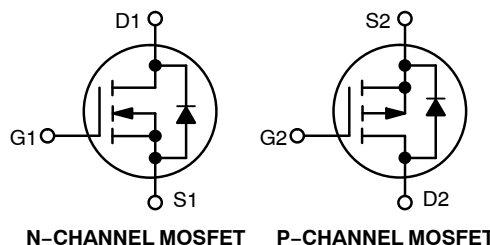


N-CHANNEL MOSFET P-CHANNEL MOSFET




TSOP-6
 CASE 318G
 STYLE 13

MARKING DIAGRAM



CC = Specific Device Code
 M = Date Code
 ■ = Pb-Free Package
 (Note: Microdot may be in either location)

PIN CONNECTION

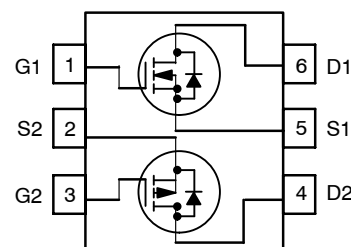

(Top View)

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 3 of this data sheet.

NTGD3149C

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	N/P	Test Conditions	Min	Typ	Max	Unit
OFF CHARACTERISTICS							
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	N	$V_{GS} = 0\text{ V}$	$I_D = 250\ \mu\text{A}$	20		V
		P		$I_D = -250\ \mu\text{A}$	-20		
Drain-to-Source Breakdown Voltage Temperature Coefficient	$V_{(BR)DSS}/T_J$	N			1.1		mV/°C
		P			1.1		
Zero Gate Voltage Drain Current	I_{DSS}	N	$V_{GS} = 0\text{ V}, V_{DS} = 16\text{ V}$	$T_J = 25\ ^\circ\text{C}$		1.0	μA
		P	$V_{GS} = 0\text{ V}, V_{DS} = -16\text{ V}$			-1.0	
		N	$V_{GS} = 0\text{ V}, V_{DS} = 16\text{ V}$	$T_J = 85\ ^\circ\text{C}$		10	
		P	$V_{GS} = 0\text{ V}, V_{DS} = -16\text{ V}$			-10	
Gate-to-Source Leakage Current	I_{GSS}	N	$V_{DS} = 0\text{ V}, V_{GS} = \pm 8\text{ V}$			± 100	nA
		P	$V_{DS} = 0\text{ V}, V_{GS} = \pm 8\text{ V}$			± 100	

ON CHARACTERISTICS (Note 2)

Gate Threshold Voltage	$V_{GS(TH)}$	N	$V_{GS} = V_{DS}$	$I_D = 250\ \mu\text{A}$	0.4	1.0	V
		P		$I_D = -250\ \mu\text{A}$	-0.4	-1.0	
Drain-to-Source On Resistance	$R_{DS(on)}$	N	$V_{GS} = 4.5\text{ V}, I_D = 3.5\text{ A}$		41	60	mΩ
		P	$V_{GS} = -4.5\text{ V}, I_D = -2.7\text{ A}$		83	110	
		N	$V_{GS} = 2.5\text{ V}, I_D = 2.9\text{ A}$		51	90	
		P	$V_{GS} = -2.5\text{ V}, I_D = -2.4\text{ A}$		104	145	
		N	$V_{GS} = 1.8\text{ V}, I_D = 2.2\text{ A}$		67	150	
		P	$V_{GS} = -1.8\text{ V}, I_D = -1.9\text{ A}$		143	220	
Forward Transconductance	g_{FS}	N	$V_{DS} = 10\text{ V}, I_D = 3.5\text{ A}$		4.7		S
		P	$V_{DS} = -10\text{ V}, I_D = -2.7\text{ A}$		5.1		

CHARGES AND CAPACITANCES

Input Capacitance	C_{ISS}	N	$f = 1\text{ MHz}, V_{GS} = 0\text{ V}$	$V_{DS} = 10\text{ V}$		387	pF	
Output Capacitance	C_{OSS}					73		
Reverse Transfer Capacitance	C_{RSS}					43		
Input Capacitance	C_{ISS}	P		$V_{DS} = -10\text{ V}$		509		
Output Capacitance	C_{OSS}					76		
Reverse Transfer Capacitance	C_{RSS}					40		
Total Gate Charge	$Q_{G(TOT)}$	N	$V_{GS} = 4.5\text{ V}, V_{DS} = 10\text{ V}, I_D = 2.0\text{ A}$ $R_G = 6\ \Omega$		4.6	5.5	nC	
Threshold Gate Charge	$Q_{G(TH)}$				0.3			
Gate-to-Source Gate Charge	Q_{GS}				0.7			
Gate-to-Drain "Miller" Charge	Q_{GD}				1.2			
Total Gate Charge	$Q_{G(TOT)}$	P		$V_{GS} = -4.5\text{ V}, V_{DS} = -10\text{ V}, I_D = -1.0\text{ A}$ $R_G = 6\ \Omega$		5.2		5.5
Threshold Gate Charge	$Q_{G(TH)}$					0.4		
Gate-to-Source Gate Charge	Q_{GS}					1.0		
Gate-to-Drain "Miller" Charge	Q_{GD}					1.2		

NTGD3149C

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	N/P	Test Conditions	Min	Typ	Max	Unit
SWITCHING CHARACTERISTICS (Note 3)							
Turn-On Delay Time	$t_{d(ON)}$	N	$V_{GS} = 4.5\text{ V}, V_{DD} = 10\text{ V},$ $I_D = 1.0\text{ A}, R_G = 6.0\ \Omega$		6.5		ns
Rise Time	t_r				3.8		
Turn-Off Delay Time	$t_{d(OFF)}$				16.4		
Fall Time	t_f				2.4		
Turn-On Delay Time	$t_{d(ON)}$	P	$V_{GS} = -4.5\text{ V}, V_{DD} = -10\text{ V},$ $I_D = -1.0\text{ A}, R_G = 6.0\ \Omega$		7.0		
Rise Time	t_r				5.3		
Turn-Off Delay Time	$t_{d(OFF)}$				33.3		
Fall Time	t_f				29.5		

DRAIN-SOURCE DIODE CHARACTERISTICS

Forward Diode Voltage	V_{SD}	N	$V_{GS} = 0\text{ V}, T_J = 25^\circ\text{C}$	$I_S = 0.8\text{ A}$		0.7	1.2	V	
		P		$I_S = -0.8\text{ A}$		-0.7	-1.2		
Reverse Recovery Time	t_{RR}	N	$V_{GS} = 0\text{ V}, dI_S / dt = 100\text{ A}/\mu\text{s}$			7.7		ns	
Charge Time	t_a					4.5			
Discharge Time	t_b						3.2		
Reverse Recovery Charge	Q_{RR}					1.9		nC	
Reverse Recovery Time	t_{RR}	P	$V_{GS} = 0\text{ V}, dI_S / dt = 100\text{ A}/\mu\text{s}$			11.4		ns	
Charge Time	t_a					7.5			
Discharge Time	t_b						3.9		
Reverse Recovery Charge	Q_{RR}								4.7

 2. Pulse Test: pulse width $\leq 300\ \mu\text{s}$, duty cycle $\leq 2\%$.

3. Switching characteristics are independent of operating junction temperatures.

ORDERING INFORMATION

Device	Package	Shipping [†]
NTGD3149CT1G	TSOP6 (Pb-Free)	3000 / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

NTGD3149C

TYPICAL CHARACTERISTICS (N-CHANNEL)

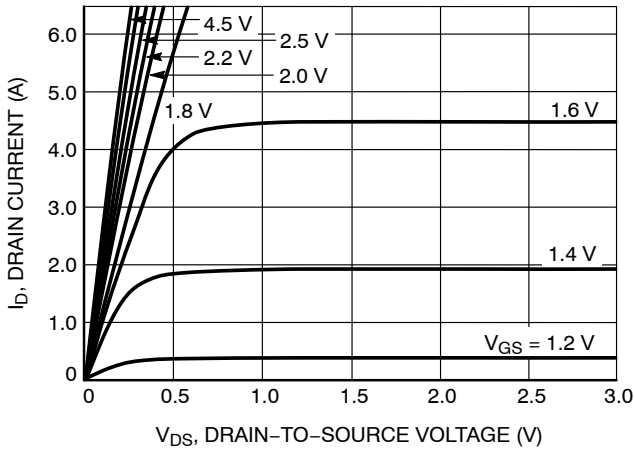


Figure 1. Nch On-Region Characteristics

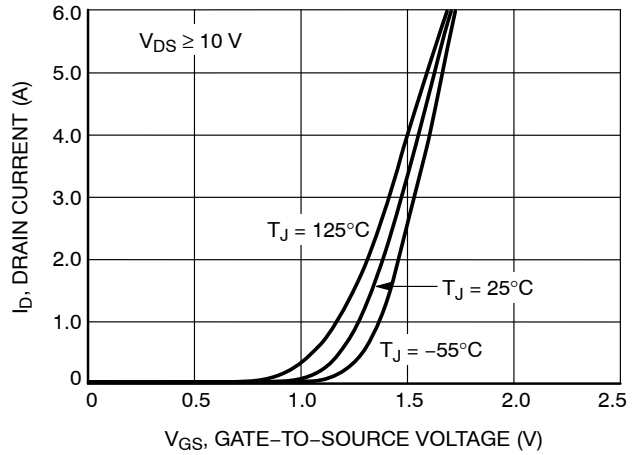


Figure 2. Nch Transfer Characteristics

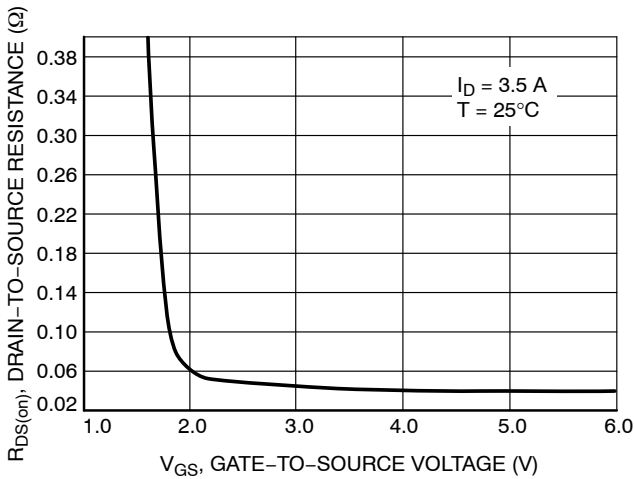


Figure 3. Nch On-Resistance vs. Gate Voltage

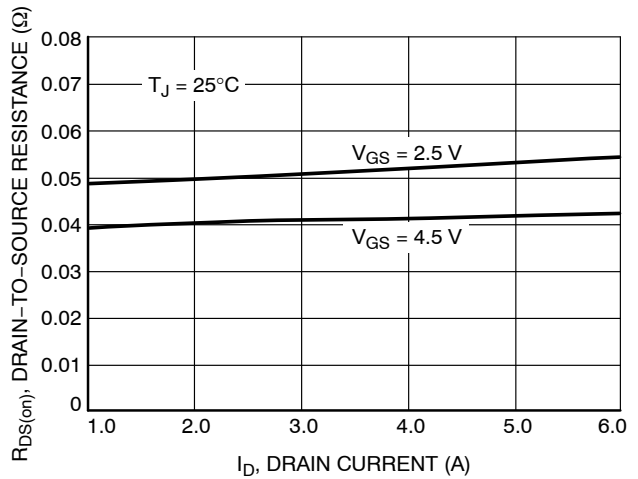


Figure 4. Nch On-Resistance vs. Drain Current and Gate Voltage

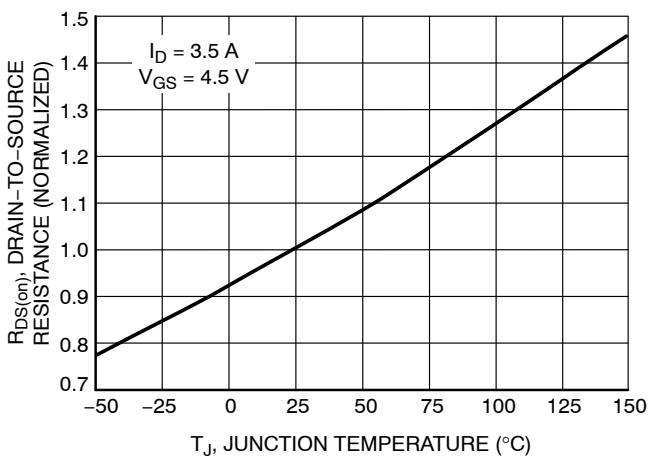


Figure 5. Nch On-Resistance Variation with Temperature

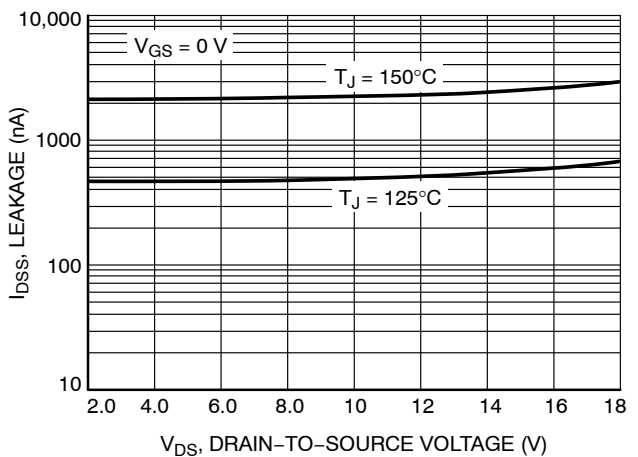


Figure 6. Nch Drain-to-Source Leakage Current vs. Voltage

NTGD3149C

TYPICAL CHARACTERISTICS (N-CHANNEL)

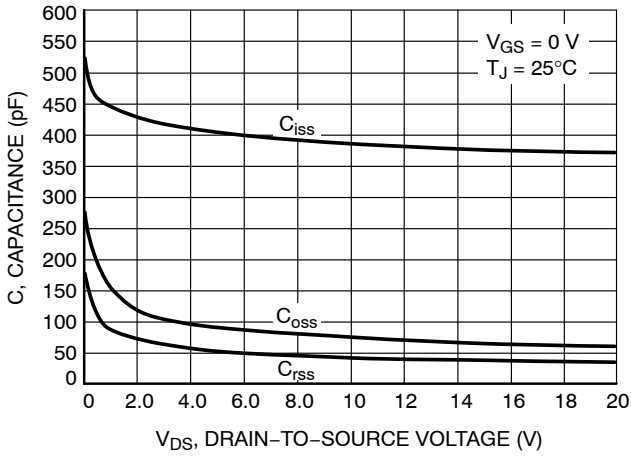


Figure 7. Nch Capacitance Variation

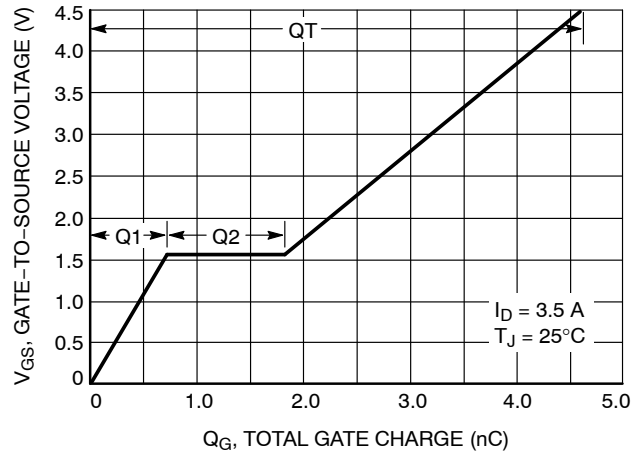


Figure 8. Nch Gate-to-Source Voltage vs. Total Charge

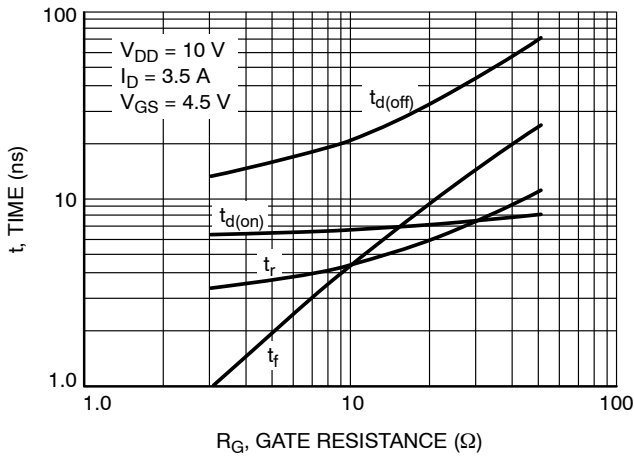


Figure 9. Nch Resistive Switching Time Variation vs. Gate Resistance

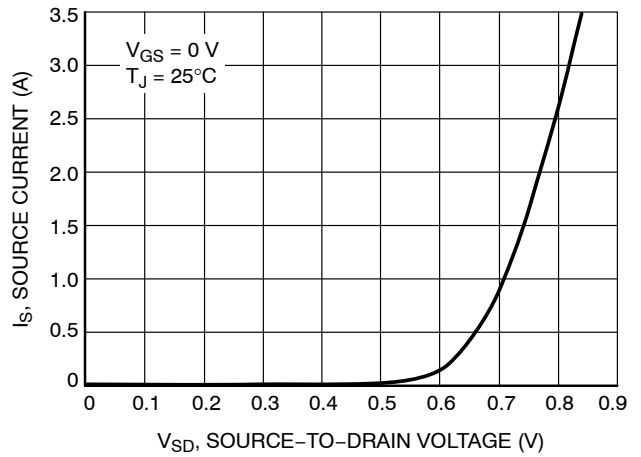


Figure 10. Nch Diode Forward Voltage vs. Current

NTGD3149C

TYPICAL CHARACTERISTICS (P-CHANNEL)

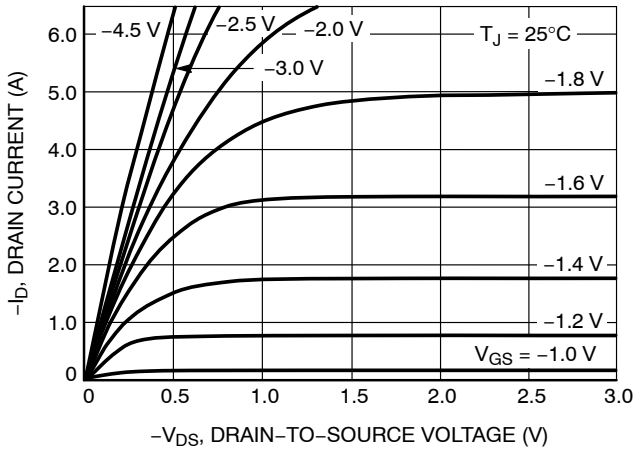


Figure 11. Pch On-Region Characteristics

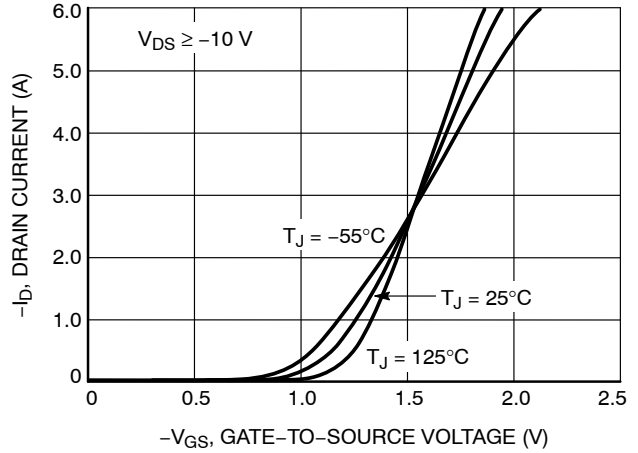


Figure 12. Pch Transfer Characteristics

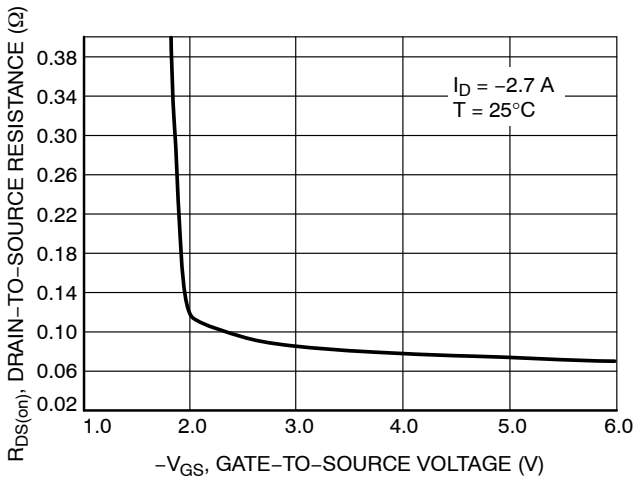


Figure 13. Pch On-Resistance vs. Gate Voltage

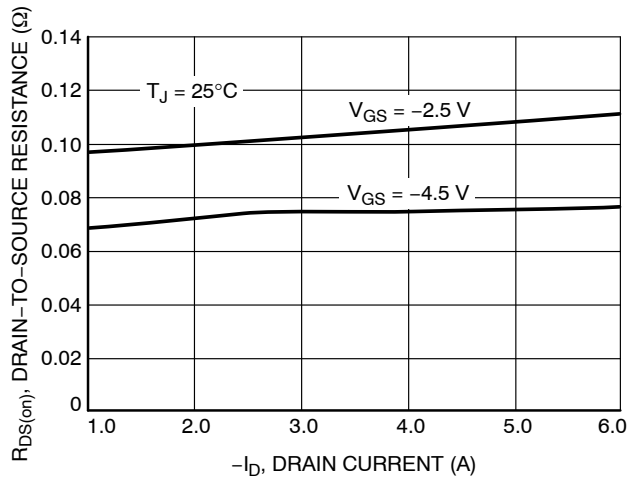


Figure 14. Pch On-Resistance vs. Drain Current and Gate Voltage

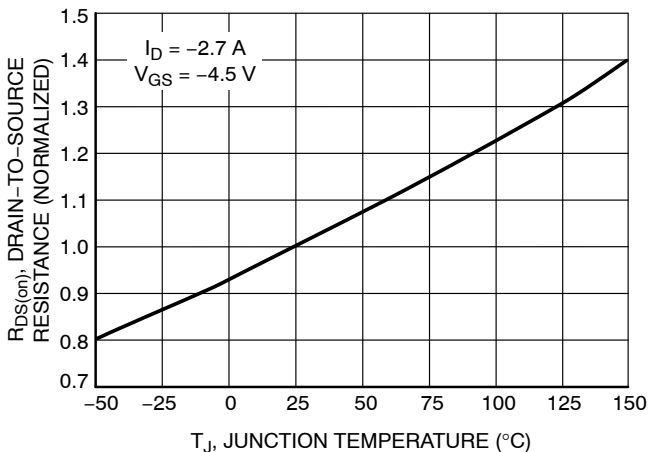


Figure 15. Pch On-Resistance Variation with Temperature

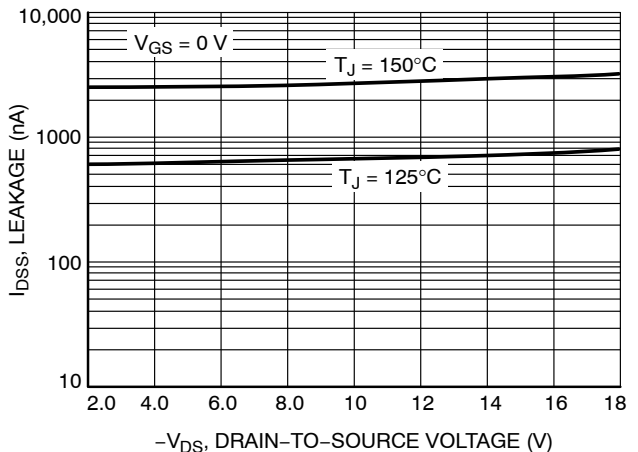


Figure 16. Pch Drain-to-Source Leakage Current vs. Voltage

NTGD3149C

TYPICAL CHARACTERISTICS (P-CHANNEL)

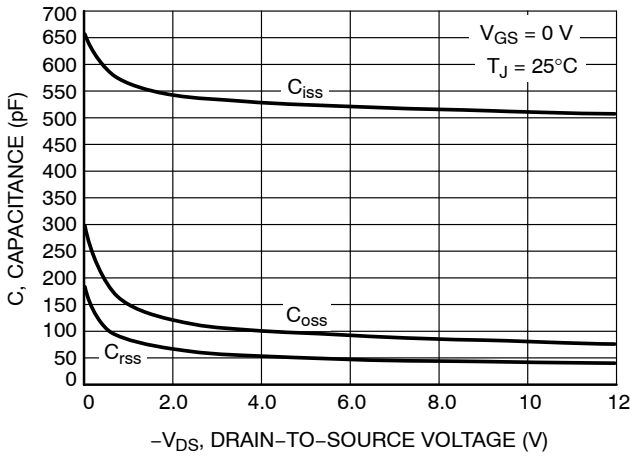


Figure 17. Pch Capacitance Variation

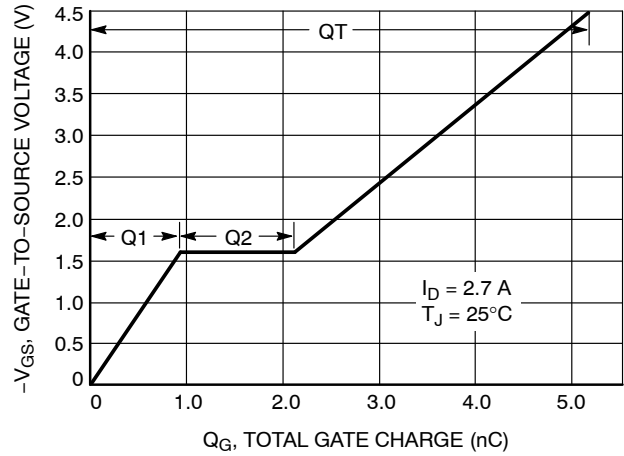


Figure 18. Pch Gate-to-Source Voltage vs. Total Charge

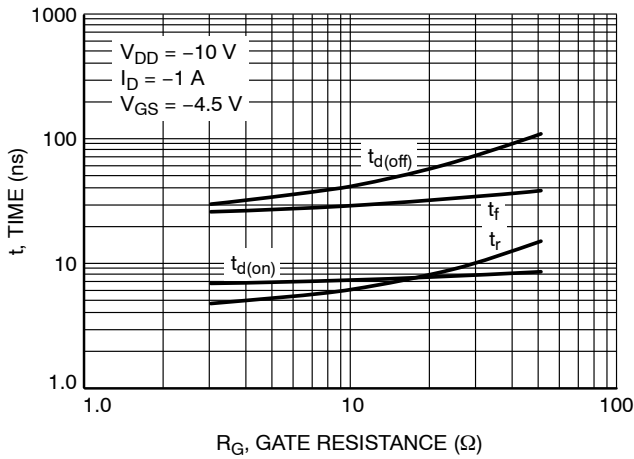


Figure 19. Pch Resistive Switching Time Variation vs. Gate Resistance


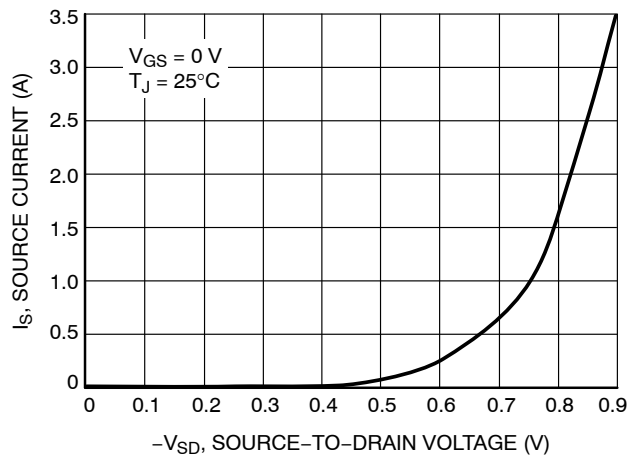


Figure 20. Pch Diode Forward Voltage vs. Current

NTGD3149C

PACKAGE DIMENSIONS

TSOP-6
CASE 318G-02
ISSUE S

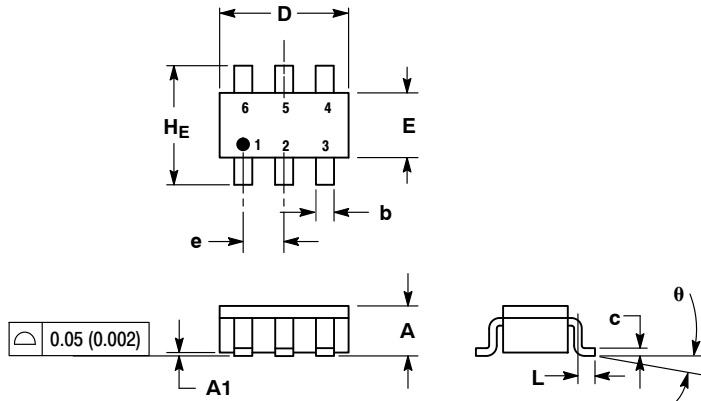

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.90	1.00	1.10	0.035	0.039	0.043
A1	0.01	0.06	0.10	0.001	0.002	0.004
b	0.25	0.38	0.50	0.010	0.014	0.020
c	0.10	0.18	0.26	0.004	0.007	0.010
D	2.90	3.00	3.10	0.114	0.118	0.122
E	1.30	1.50	1.70	0.051	0.059	0.067
e	0.85	0.95	1.05	0.034	0.037	0.041
L	0.20	0.40	0.60	0.008	0.016	0.024
HE	2.50	2.75	3.00	0.099	0.108	0.118
θ	0°	-	10°	0°	-	10°

STYLE 13:

1. GATE 1
2. SOURCE 2
3. GATE 2
4. DRAIN 2
5. SOURCE 1
6. DRAIN 1

SOLDERING FOOTPRINT*

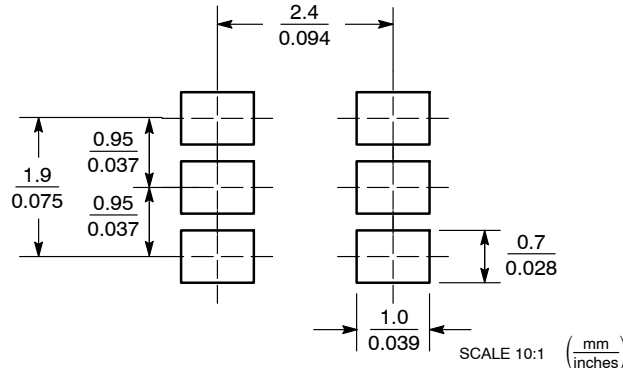

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA
Phone: 480-829-7710 or 800-344-3860 Toll Free USA/Canada
Fax: 480-829-7709 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.