

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)

[AT-K-C-26-6-S/7](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

1 2 3 4 5 6 7

A



B

C

D

E

F

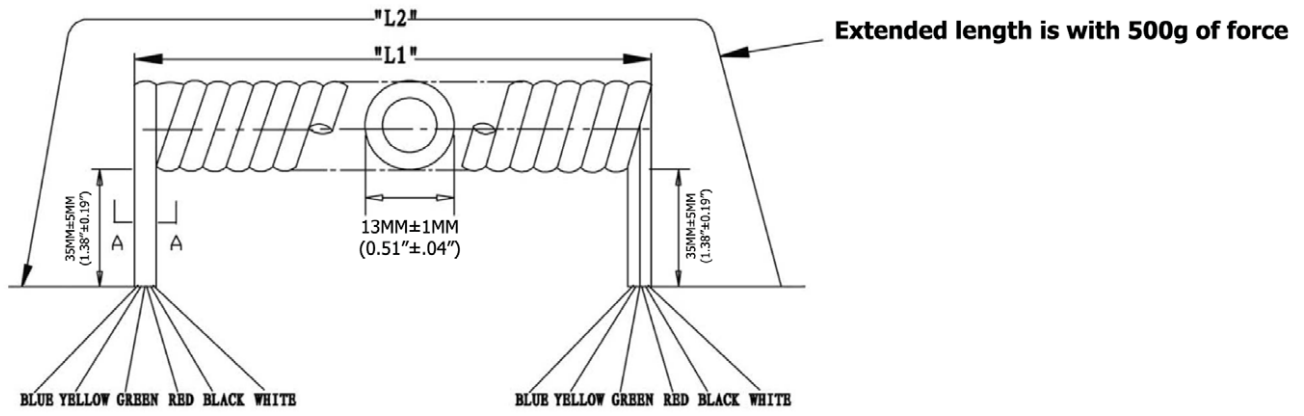

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	29.5 Inches
2,133.6MM-2,453.64MM	749.3MM

- Material:**
- Conductor(X6C): 26AWG (0.12X12) Bare Copper
 - Insulation(X6C):PP6331 ID 0.95-1.0
 - Jacket: PVC NO UL 80P
 - Package: Individual PE Bag



Scale	1:1					Name	Item No.
TOLERANCE					Drawn	11.02.11	AT-K-C-26-6-S/7
X.X	±0.40				Approved		Title
X.XX	±0.25						NON-UL 26AWG (0.16/7)*6C, O.D.: 2.4*6.8MM, Pre-Cut, 7Ft. Silver
X.XXX	±0.15						Drawing No.
Angle	±3°						rev00
							Replace
							Sheet



1 2 3 4 5 6 7

H

A

B

C

D

E

F

G

H