

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)

[AT-K-C-26-6-S/5](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

1 2 3 4 5 6 7

A


B

C


D

E

F

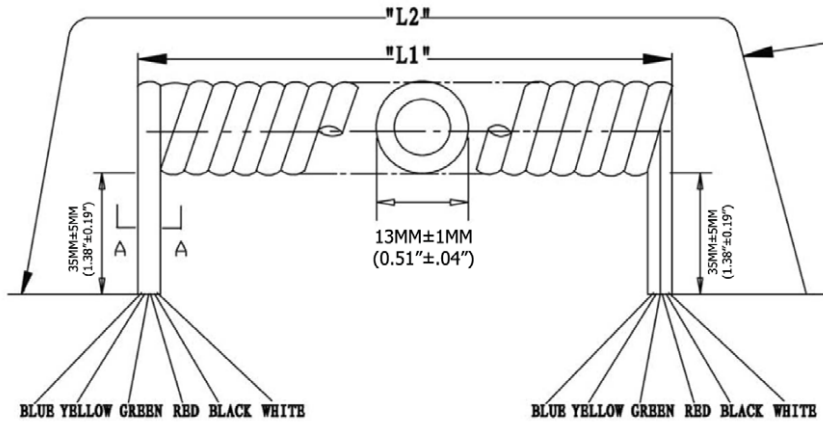

Extended length is with 500g of force



SEC: A=A

Extended Length ("L2")	Typical Retracted Length ("L1")
60.0 Inches - 69.0 Inches	21.5 Inches
1,524.0MM-1,752.6MM	546.1MM

Material:

- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C):PP6331 ID 0.95-1.0
- Jacket: PVC NO UL 80P
- Package: Individual PE Bag

G

H

Scale	1:1					Name	Item No.
TOLERANCE					Drawn	12.19.11	AT-K-C-26-6-S/5
X.X	±0.40				Approved		
X.XX	±0.25						Title
X.XXX	±0.15						NON-UL 26AWG (0.16/7)*6C, O.D.: 2.4*6.8MM, Pre-Cut, 5Ft., Silver
Angle	±3°						Drawing No.
							rev00
							Replace
							Sheet



1 2 3 4 5 6 7