




Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)
[AT-C-26-8/8/W-7/R](#)


For any questions, you can email us directly:
sales@integrated-circuit.com

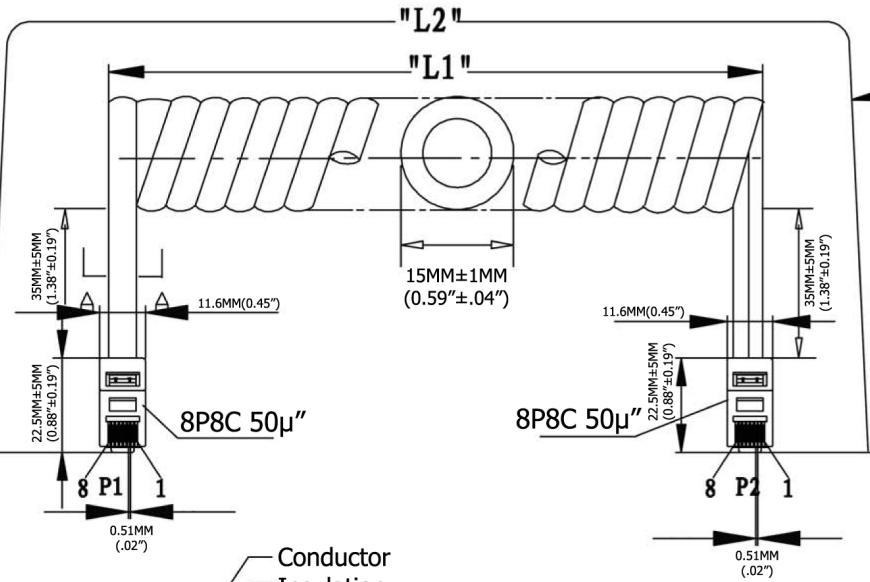

Extended length is with 500g of force

Materials:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [.014MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm [.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

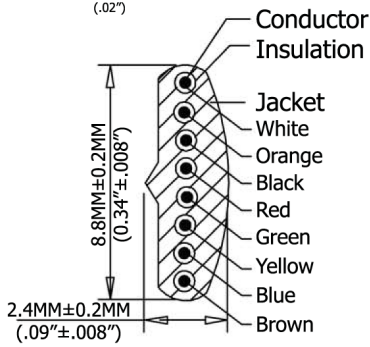

| P1 | P2 |
|----|----|
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |

| Extended Length ("L2") | Typical Retracted Length ("L1") |
|---------------------------|---------------------------------|
| 84.0 Inches - 96.6 Inches | 39.5 Inches |
| 2,133.6MM-2,453.64MM | 1,003.3MM |



ITEM NO
AT-C-26-8/8/W-7/R
 TITLE NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM
 Reverse Plug, 50µ" of contact plating, WHITE

ASSMANN
 Electronics, Inc.
 1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283
 Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
 © Copyright 2009 by Assmann Electronic Components
 All International Rights Reserved