

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[132280](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	ECR NO.	DESCRIPTION
NC	05/30/00	-	INITIAL RELEASE
NC	04/30/08	100012	UPDATE DRAWING FORMAT

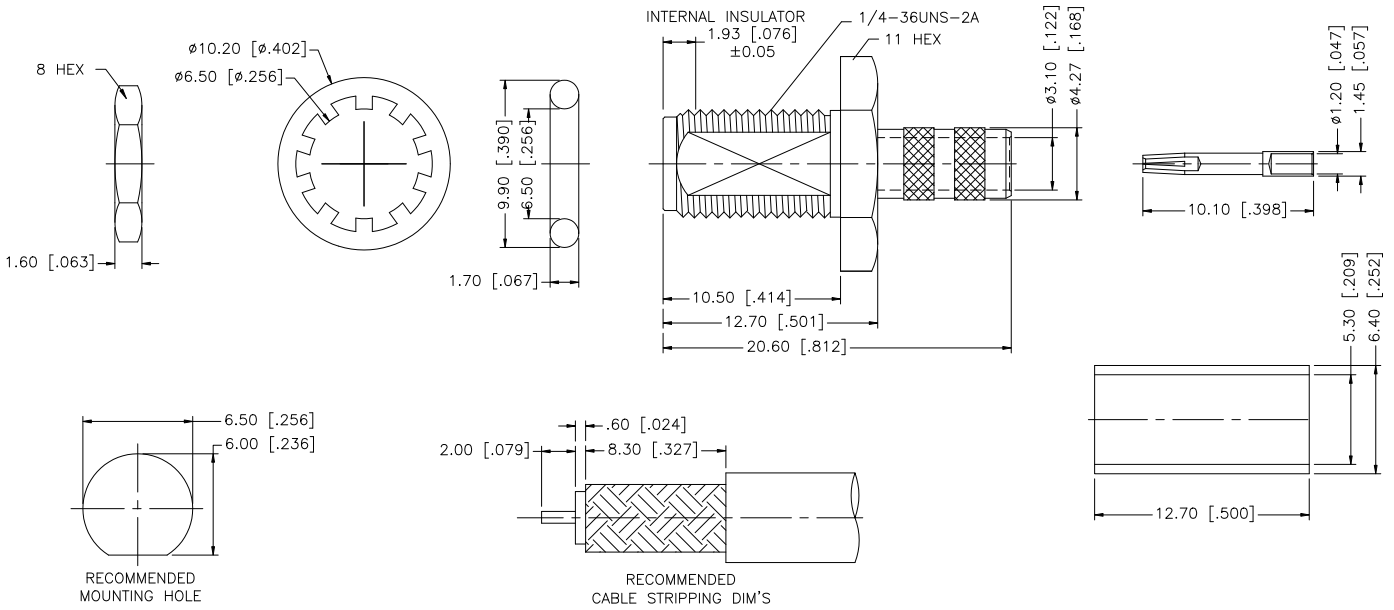

NOTES:
 1. CRIMPED FERRULE HEX CRIMP SIZE .213"

DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	<h1 style="color: blue; margin: 0;">Amphenol Connex</h1>	
8								Amphenol Connex PART DESCRIPTION SMA BULKHEAD CRIMP JACK O-RING SEAL (FOR RG-58C/U, 58/U CABLE)
7	FERRULE	COPPER	GOLD	1	DRAWN	GRS	04/30/08	
6	HEX NUT	BRASS	GOLD	1	CHECKED			
5	LOCK WASHER	BRASS	GOLD	1	ISSUED			
4	GASKET	SILICONE	RED	1	SHEET	1 OF 1		
3	CONTACT PIN	BER. COPPER	GOLD	1	PART NO.			132280
2	INSULATOR	PTFE	NATURAL	1	DWG. NO.			132280.DWG
1	BODY	BRASS	GOLD	1	REV. A			SCALE NA
DO NOT SCALE DRAWING				CAD FILE C:/132/132280.DWG				

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 8mm ± 0.20mm
 8 - 30mm ± 0.40mm
 30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
 .020 - .315 = ± 0.007"
 .315 - 1.180 = ± 0.015"
 1.180 - 4.724 = ± 0.020"

Amphenol Connex

**SMA BULKHEAD CRIMP JACK O-RING SEAL
 (FOR RG-58C/U, 58/U CABLE)**

132280

DWG. NO. 132280.DWG

REV. A

SCALE NA