

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Z-Hook](#)
[BXM-36GRN](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: XMCOLOR
 HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
 AVAILABLE IN TEN COLORS.
 CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533.
 GOLD PLATED PER MIL-G-45204 B TYPE 1 0.0001 [0.00254] THICK MINIMUM.
 SPRING: STAINLESS STEEL TYPE 302.

- P/N: 9202COLOR
 HOUSING: MOLDED NYLON, AVAILABLE IN TEN COLORS.
 FRAME: BRASS, NICKEL PLATED.
 CONTACT: BeCu OR PHOSPHOR BRONZE, NICKEL PLATED.

- P/N: W-200/COLOR
 22AWG 65X40 TINNED COPPER
 0.070 [1.78] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.

- PERFORMANCE
 MAXIMUM CURRENT: 2.5 AMPS
 MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
 MAXIMUM TEMPERATURE: 221°F (105°C)

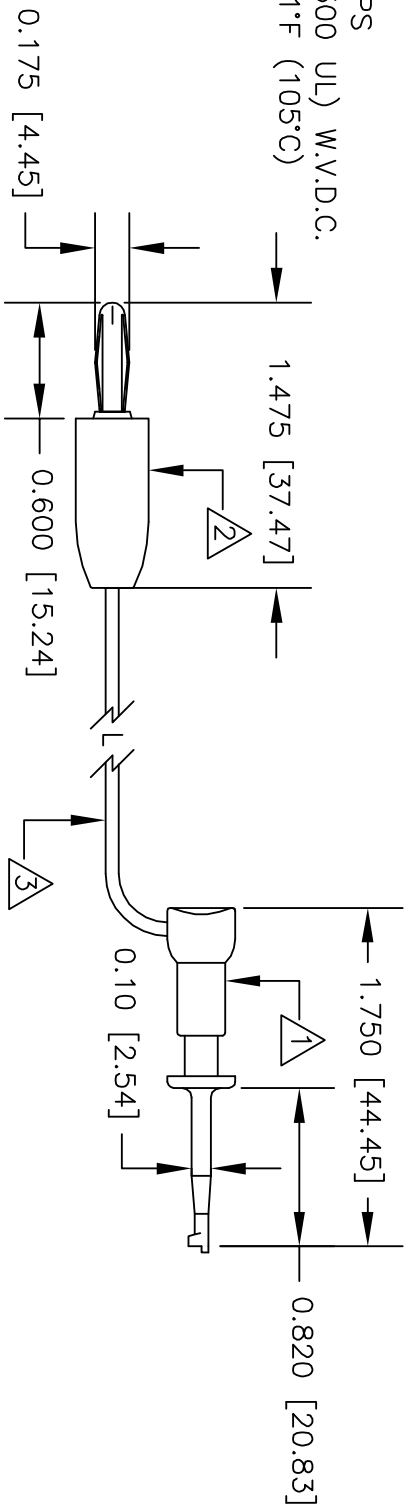

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. FRACTIONS ARE IN FRACTIONS. DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
±	.XX ±	DRAWN	DATE	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
±	.XXX ±	APPROVED BY			
MATERIAL SEE NOTE.		R.L.	9/10		
FINISH SEE NOTE.				MICRO-HOOK (XM) TO	
NEXT ASSY USED ON				STK STD BAN PLUG (9203)	
APPLICATION DO NOT SCALE DRAWING				SIZE CODE IDENT NO. DRAWING NO. A 08505 BXM	
		SCALE 1:1		SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT.

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED