

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RE](#)
[135103-04-06.00](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

| REV. | DATE | ECR-NO. | DESCRIPTION |
|------|----------|---------|-----------------|
| NC | 02/03/09 | - | INITIAL RELEASE |

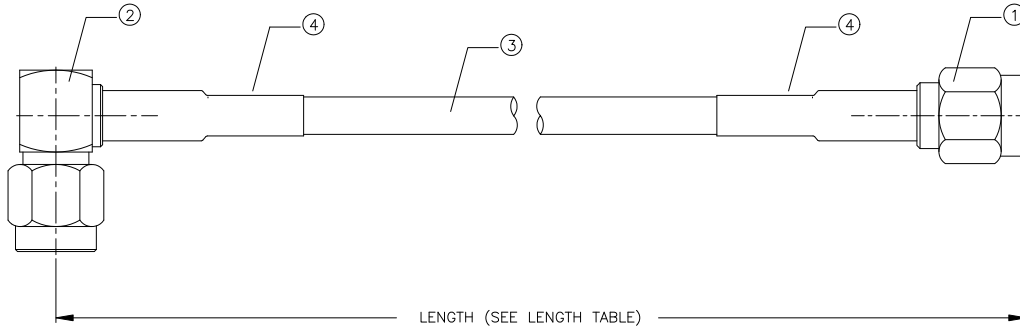

| PART NUMBER | LENGTH (IN.) |
|-----------------|--------------|
| 135103-04-06.00 | 6.00 |
| 135103-04-12.00 | 12.00 |
| 135103-04-24.00 | 24.00 |
| 135103-04-36.00 | 36.00 |
| 135103-04-48.00 | 48.00 |

- NOTE:
- PERFORM CONTINUITY AND HI-POT TESTING.
 - PACKAGED INDIVIDUALLY IN HEAT SEALED POLY BAG.

| | PN | DESCRIPTION | QTY |
|---|-------------|--|--------|
| 4 | 009-954-352 | HEAT SHRINK TUBING, BLACK, 3/8" DIAMETER | A/R FT |
| 3 | 009-881-377 | COAXIAL CABLE, RG58/U | A/R FT |
| 2 | 132122 | CONNECTOR, SMA R/A PLUG, GOLD | 1 |
| 1 | 132113 | CONNECTOR, SMA STRAIGHT PLUG, GOLD | 1 |

| | | | | |
|--|-----------|----------------------------|---|----------|
| <small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE INCHES AND FOR CUSTOMER REFERENCE ONLY.</small> <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:</small> 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:</small> .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING | APPROVALS | DATE | <h2 style="color: blue;">Amphenol Connex</h2> <p>SMA STRAIGHT PLUG TO SMA R/A PLUG RG58</p> <p>PART NO. 135103-04-XX.XX</p> | |
| | DRAWN | G.R.S. | | 02/03/09 |
| | CHECKED | | | |
| | ISSUED | | | |
| | SHEET | 1 OF 1 | | |
| | CAD FILE | C:/135/135103-04-XX.XX.DWG | | |
| | DWG. NO. | 135103-04-XX.XX.DWG | REV. NC SIZE A SCALE NA | |