Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Essentra Components (formerly Richco, Inc.)
RBF-4.8-11.1-12

For any questions, you can email us directly:
sales@integrated-circuit.com

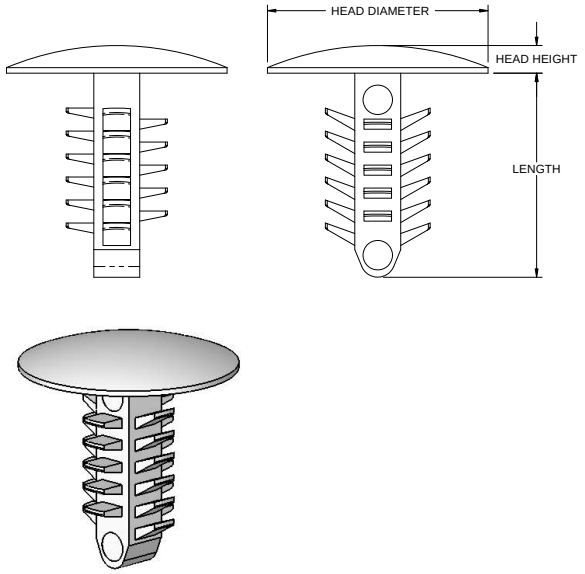

PART NO.	HOLE DIAMETER ±.003 [0.08]	HEAD DIAMETER	SUGGESTED TOTAL BOARD THICKNESS	HEAD HEIGHT	LENGTH
RBF-4-8.6-8	.157(4.00)	.32(8.0)	.08-.17(2.1-4.3)	.04(1.0)	.34(8.6)
RBF-4-11.1-8			.08-.28(2.1-7.2)		.44(11.1)
RBF-4-15-8			.22-.42(5.7-10.7)		.59(15.0)
RBF-4-8.6-12		.47(12.0)	.08-.17(2.1-4.3)	.06(1.5)	.34(8.6)
RBF-4-11.1-12			.08-.28(2.1-7.2)		.44(11.1)
RBF-4-15-12			.22-.42(5.7-10.7)		.59(15.0)
RBF-4-8.6-16		.63(16.0)	.08-.17(2.1-4.3)	.08(2.0)	.34(8.6)
RBF-4-11.1-16			.08-.28(2.1-7.2)		.44(11.1)
RBF-4-15-16			.22-.42(5.7-10.7)		.59(15.0)
RBF-4.8-8.6-8	.188(4.76)	.32(8.0)	.08-.17(2.1-4.3)	.04(1.0)	.34(8.6)
RBF-4.8-11.1-8			.08-.28(2.1-7.2)		.44(11.1)
RBF-4.8-15-8			.22-.42(5.7-10.7)		.59(15.0)
RBF-4.8-8.6-12		.47(12.0)	.08-.17(2.1-4.3)	.06(1.5)	.34(8.6)
RBF-4.8-11.1-12			.08-.28(2.1-7.2)		.44(11.1)
RBF-4.8-15-12			.22-.42(5.7-10.7)		.59(15.0)
RBF-4.8-8.6-16		.63(16.0)	.08-.17(2.1-4.3)	.08(2.0)	.34(8.6)
RBF-4.8-11.1-16			.08-.28(2.1-7.2)		.44(11.1)
RBF-4.8-15-16			.22-.42(5.7-10.7)		.59(15.0)
RBF-6.4-8.6-8	*.250(6.35)	.32(8.0)	.08-.17(2.1-4.3)	.04(1.0)	.34(8.6)
RBF-6.4-11.1-8			.08-.28(2.1-7.2)		.44(11.1)
RBF-6.4-15-8			.22-.42(5.7-10.7)		.59(15.0)
RBF-6.4-8.6-12		.47(12.0)	.08-.17(2.1-4.3)	.06(1.5)	.34(8.6)
RBF-6.4-11.1-12			.08-.28(2.1-7.2)		.44(11.1)
RBF-6.4-15-12			.22-.42(5.7-10.7)		.59(15.0)
RBF-6.4-8.6-16		.63(16.0)	.08-.17(2.1-4.3)	.08(2.0)	.34(8.6)
RBF-6.4-11.1-16			.08-.28(2.1-7.2)		.44(11.1)
RBF-6.4-15-16			.22-.42(5.7-10.7)		.59(15.0)
RBF-7.1-11.1-8	*.281(7.14)	.32(8.0)	.08-.28(2.1-7.2)	.04(1.0)	.44(11.1)
RBF-7.1-15-8			.15-.42(3.8-10.7)		.59(15.0)
RBF-7.1-19-8			.27-.56(6.9-14.2)		.75(19.0)
RBF-7.1-11.1-12		.47(12.0)	.08-.28(2.1-7.2)	.06(1.5)	.44(11.1)
RBF-7.1-15-12			.15-.42(3.8-10.7)		.59(15.0)
RBF-7.1-19-12			.27-.56(6.9-14.2)		.75(19.0)
RBF-7.1-11.1-16		.63(16.0)	.08-.28(2.1-7.2)	.08(2.0)	.44(11.1)
RBF-7.1-15-16			.15-.42(3.8-10.7)		.59(15.0)
RBF-7.1-19-16			.27-.56(6.9-14.2)		.75(19.0)

* FOR USE IN METAL, LEADING EDGE OF HOLE MUST BE BROKE

NOTES:
1. STANDARD MATERIAL: NYLON 6/6 UL94 V-2 (RMS-01). COLOR BLACK.
2. ALTERNATE MATERIALS AVAILABLE BY SPECIAL ORDER ONLY:
 - NYLON 6/6 UL94 V-2 (RMS-01). COLOR NATURAL. TO ORDED ADD "NT" ON THE END OF BASE PART NO.
 - NYLON 6/6 UL 94 V-0 (RMS-19). COLOR BLACK. TO ORDER ADD "-V0" TO END OF PART NUMBER.
 - UV STABILIZED NYLON UL 94 V-2 (RMS-46). COLOR BLACK. TO ORDER ADD "-UVB" TO THE END OF PART NO.

REV.	DESCRIPTION	ENGR.	DATE
D	SEE CO 200656 FOR CHANGES	SK	04/13/11
C	SEE CO 200370 FOR CHANGES	SK	05/26/09
B	SEE ECN # 917 FOR CHANGES	SK	01/18/05
A	RELEASED FOR PRODUCTION	SM	10/19/04

CREATED USING SOLIDWORKS
TOLERANCES UNLESS NOTED
.XX=±.01
.XXX=±.005
FRAC.=±1/64
ANG.=±1°

TITLE: BARBED PUSH FASTENER

DWG IN IN [MM]

FINAL

FILE #: RBF | DWN: D.J.Z. | APP: DJZ

SHEET: 1 OF 1 | SHEET SIZE: B | DT: 06/09/2004 | CHKD: SJ

RE: RICHCO INC.
--

RICHCO, INC.
ENG@RICHCO-INC.COM
(773) 539-4060

PART # SEE TABLE

PRINT TYPE CA