

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Pomona Electronics 73068-BB-12

For any questions, you can email us directly: sales@integrated-circuit.com






Technical Data Sheet

Model 73068

MCX Right-Angle Plug to MCX Right-Angle Plug, RG316/U

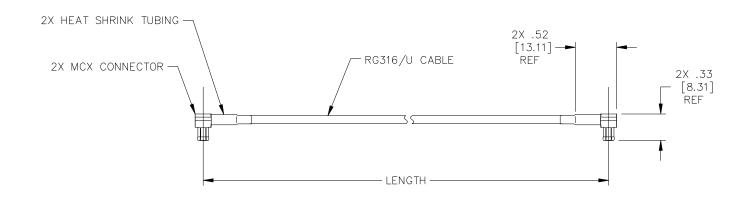



Model 73068 MCX Right-Angle Plug to MCX Right-Angle Plug, RG316/U

Snap-on coupling and miniature size for fast connect and disconnect where space is limited

Features

- DC 3GHz bandwidth.
- Connectors are precision machined and gold-plated for low loss.
- Perfect for applications where space, weight, performance and ease of connection are required.

USA: Sales: 800-490-2361

 $\textcolor{red}{\textbf{Technical Support}} \underbrace{\textbf{technical support@pomonatest.com}}$

Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

Materials

MCX Male Connectors:

Center Contact: Phosphor Bronze, Gold Plated

Connector Body: Brass, Gold Plated Crimp Ferrule: Copper, Nickel Plated Insulators: PTFE

Specifications

Cable Type	RG316/U
Impedance	50Ω
Frequency Range	DC - 3GHz
Insulation Resistance	≥ 1000 MΩ
Insulator Withstand	750V
	-55° C to +155°C
Temperature Range	(-67°F to +311°F)
Jacket	FEP
Cable O.D.	0.098" (2.5mm)
	7 x .18 silver coated
Center Conductor (mm)	copper covered steel

Ordering Information

Model: 73068

Cable Designator: **BB** = RG316/U Standard Lengths: **6"**, **12"**, **24"**, **36"**

- 6" ± .118" (152mm ± 3mm)
- 12" ± .157" (305mm ± 4mm)
- 24" ± .275" (610mm ± 7mm)
- 36" ± .394" (914mm ± 10mm)

Ordering Example: **73068-BB-24**, Cable is RG316/U with length of 24" (610mm)

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.