

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[1200661137](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

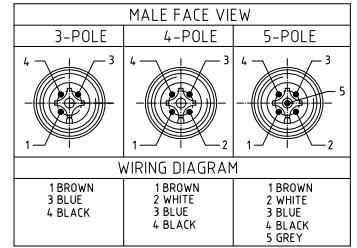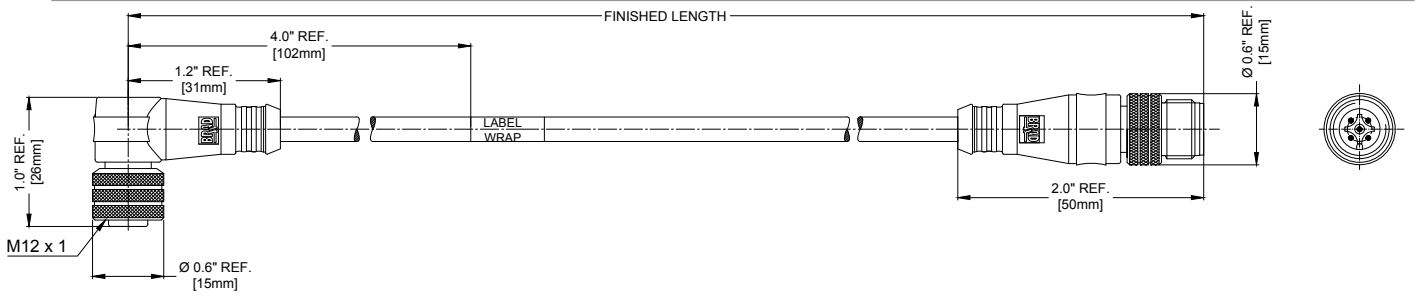

883031A09M010

no poles: 3-5 pole
 cable type: #22/3-5 PVC YELLOW
 cable length: 010----1 Meter / 100----10 Meters

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY IS	RoHS COMPLIANT

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1200661137	883031A09M010	1.0M +55.6 -0 [3.28' +2.19" -0]
1200661389	885031A09M010	1.0M +55.6 -0 [3.28' +2.19" -0]
1200661262	884031A09M010	1.0M +55.6 -0 [3.28' +2.19" -0]
1200661280	884031A09M100	10.0M +55.6 -0 [32.8' +2.19" -0]

COMPONENT	MATERIAL	FINISH
LABEL	MYLAR	BLACK/YELLOW
COUPLER	BRASS	NICKEL PLATED
PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
INSERT	NYLON	BLACK
OVERMOLD	PUR	YELLOW
CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW

UPDATED FOR PART MATRIX EC NO: IPC2014-0586 DRWN: GOSSTARS 1/28/15 CHRD: TWOLLEGE APPR: ENCOOMAN 20/10/129 REV: A	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽ = 0	4 PLACES ± .13 ± .010	IN/MM	NTS	INCH	
	∇ = 0	3 PLACES ± .13 ± .010				
		2 PLACES ± .13 ± .010				
	1 PLACE ± .25 ± .020	ANGULAR ± .5°				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART			
			MATERIAL NO. A3		DOCUMENT NO. SD-120066-013	SHEET NO. 1 OF 1
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

10 9 8 7 6 5 4 3 2 1