

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[CTS Electronic Components](#)
[4300-004LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

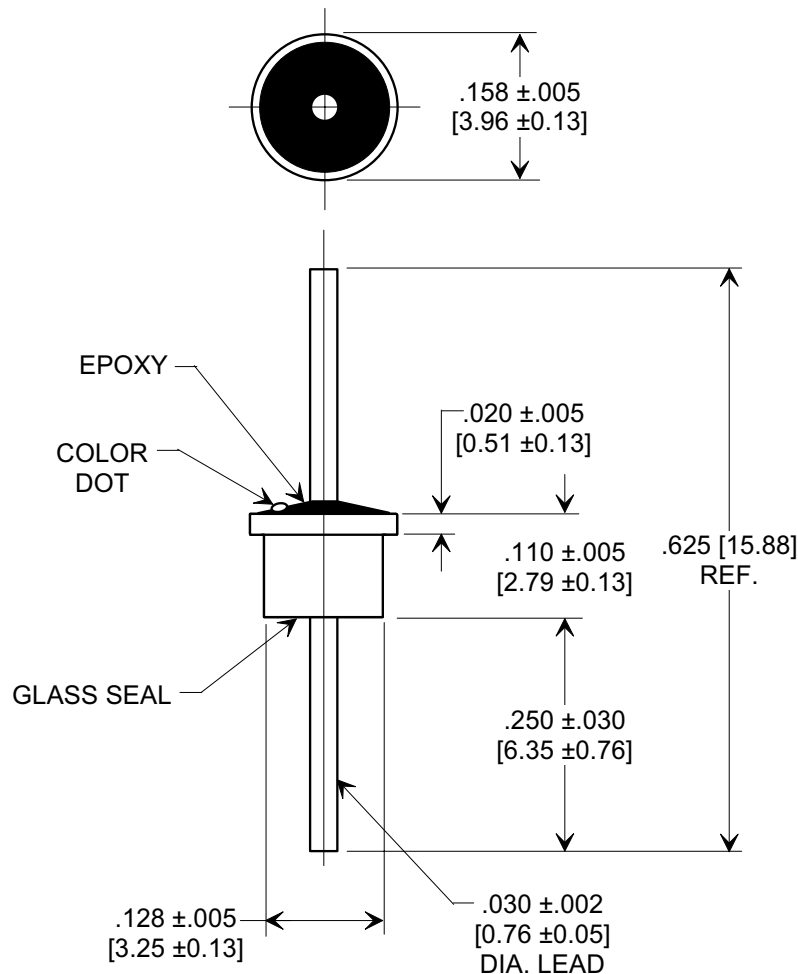

NOTES:

- Operating temperature range: -55°C to +125°C.
- Gold plated case and lead.
- Epoxy sealed on opposite end from glass seal.
- Max. recommended soldering temperature: 260°C.
See installation recommendations.
- Recommended mounting hole: .135 dia.
- Solder preform available for mounting.
- Tusonix Standard part number: 4300-004.
Tusonix RoHS compliant part number: 4300-004 LF.
Customer must specify Standard or RoHS part number when ordering.
- RoHS compliant part marked with additional dark green dot for identification.

Cx (pF)	TOL.	DC WORKING VOLTAGE		DC CURRENT (AMPS)	MIN. NO LOAD INSERTION LOSS (dB) @ 25° C PER MIL-STD-220					COLOR CODE
		85°C	125°C		1 MHz	10 MHz	100 MHz	1GHz	10 GHz	
5000	GMV	150	100	5	---	15	30	45	55	YELLOW

X-2015 Rev-0	REVISION RECORD	Original Release C.O. 20000522-5-01 ADDED NOTES 7 & 8. S.M. 05-23-05	20050511-2-10		--TOLERANCES-- Unless Otherwise Specified	Title SOLDER MOUNT EMI FILTER	
					DECIMAL $\pm$		
					ANGLES $\pm$	Drawn S.M. 05-23-00	Scale 5 X
					TUSONIX TUCSON, ARIZONA	Approved H.R. 05-23-00	A 4300-004