

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CTS Electronic Components](#)

[CV35A250](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.


Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

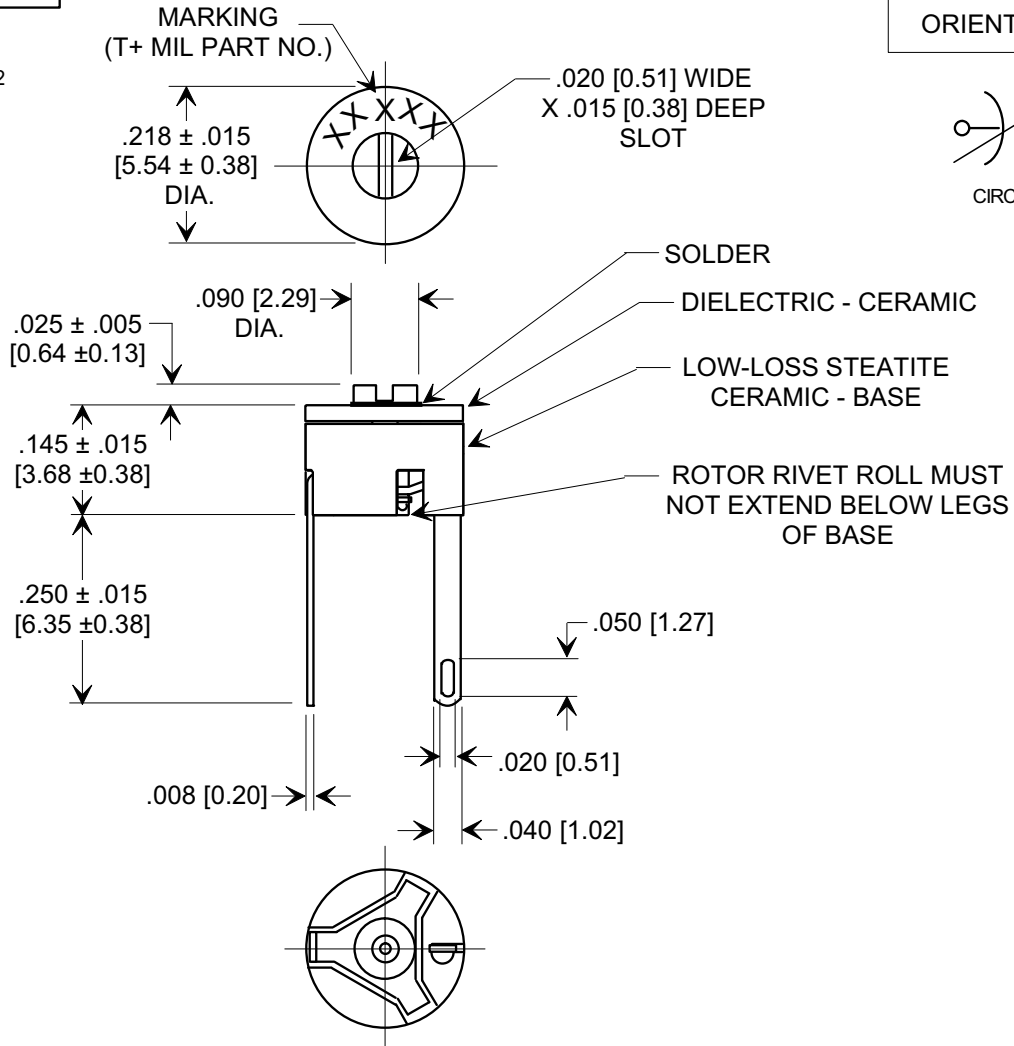

SPECIFICATIONS

TUSONIX STYLE	518-016
Capacitance Range:	5.0 - 25 pF
Capacitance Tolerance:	MIN: +0% , MAX: -0, +50%
Temperature Characteristic:	DIELECTRIC CODE A
Rating:	100 VDC @ 85°C
Operating Temperature Range:	-55°C TO + 125°C
To MIL - C - 81/6E CV35A250	

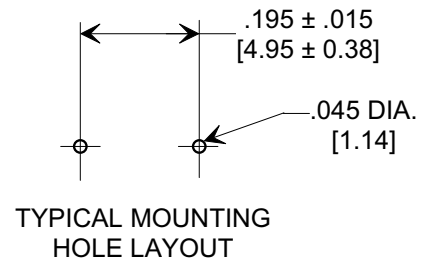

X-2015 Rev-0

REVISION RECORD

Original Release
C.O. **ECO-671**

A

TOLERANCES
unless otherwise specified
2 PLC.
DECIMAL ± $\frac{\quad}{\quad}$
3 PLC.
DECIMAL ± .005 [0.13]

ANGLES ± $\frac{\quad}{\quad}$

TUSONIX
TUCSON, ARIZONA

Title MINIATURE CERAMIC TRIMMER	
Drawn	L.E. 04-16-09
Approved	R.L. 04-16-09
A	518-016 A 5.0-25