



**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**



Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

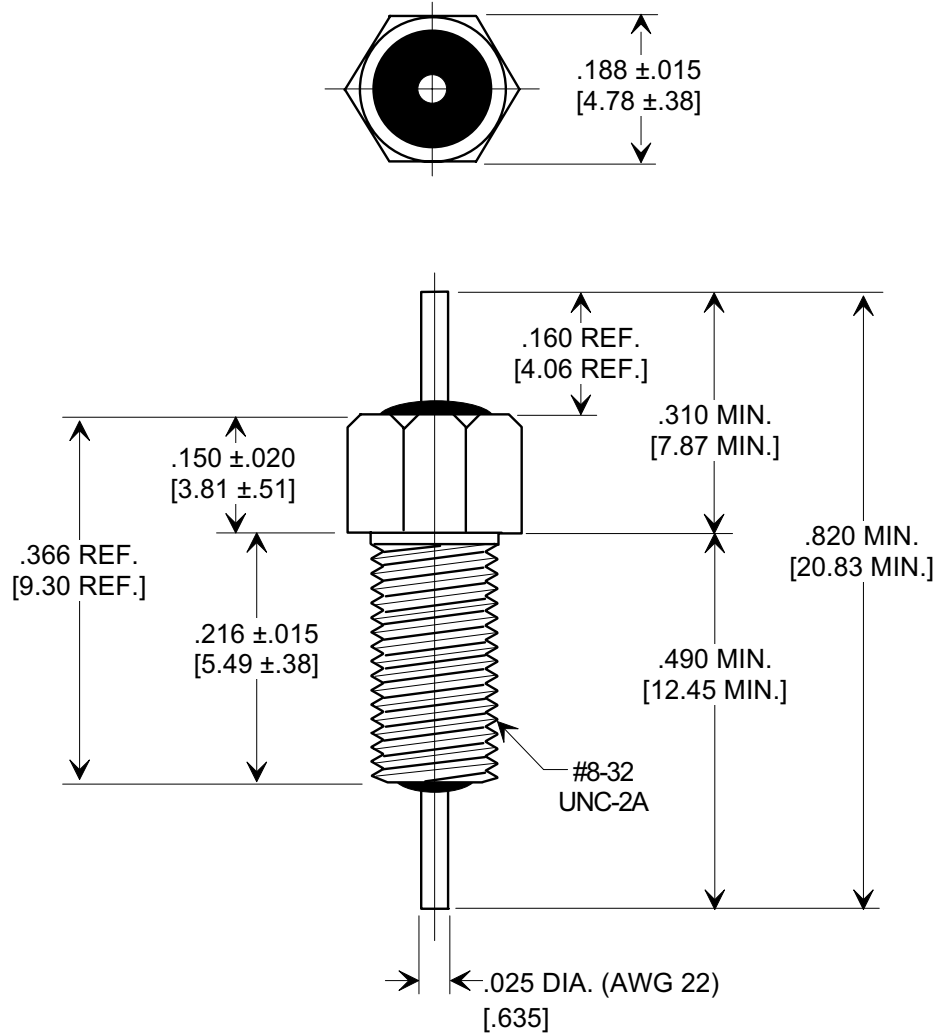

15,000 pF	50 VDC	20A	20	50	65	75	85
MIN. CAP.	125°C WORKING VOLTAGE	CURRENT IDC	10 MHz	50 MHz	100 MHz	200 MHz	1-10 GHz
			MINIMUM NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220				

X-2015 Rev-0	<b>REVISION RECORD</b>			--TOLERANCES-- Unless Otherwise Specified	Title		
	Original Release C.O.				<b>EMI FILTER MIL-15733</b>		
	WAS SK 7093-001-S., E.C. 06-14-93	<b>0</b>		DECIMAL ±			Drawn
	DWV REVISED. E.C. 05-12-94	<b>1</b>		ANGLES ±	Approved	J.Mc. 01-12-98	
REW. TO COMP. FMT. & ADD THREAD CALLOUT. S.M. 01-12-98	<b>2</b>	<b>19980105-10-01</b>		<b>TUSONIX</b> TUCSON, ARIZONA	<b>A</b>	<b>4251-503</b>	