

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[10084600-111LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER
SEE TABLE, SHEET 5

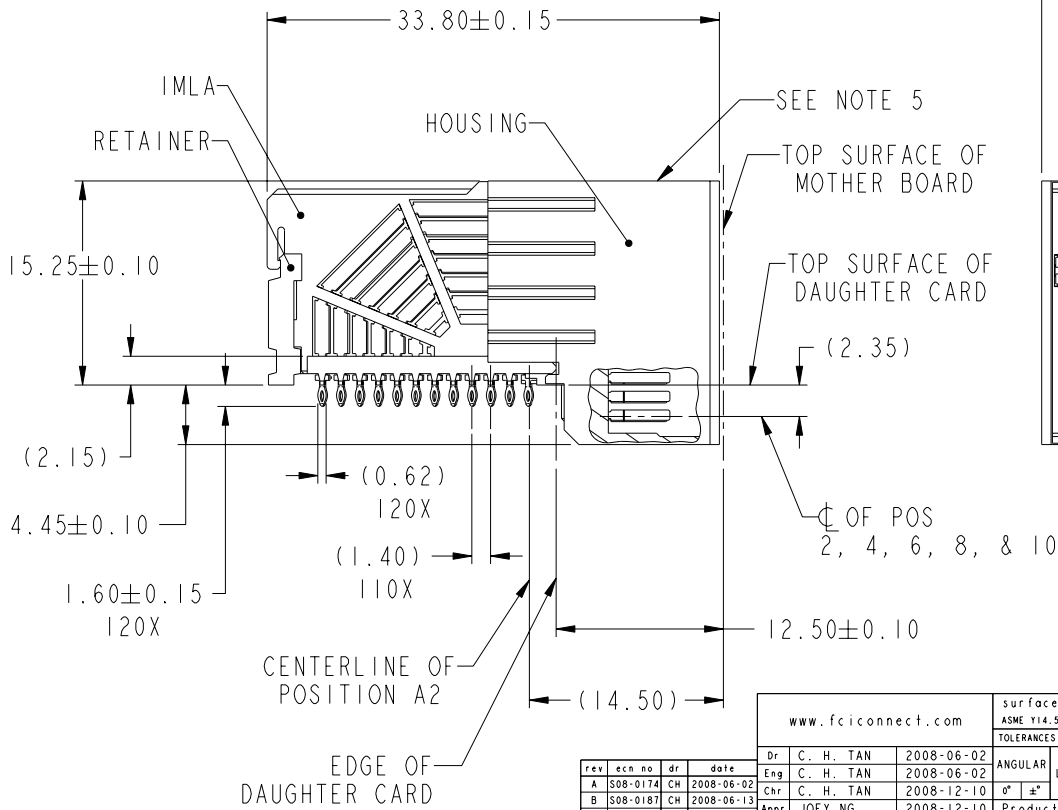


rev	ecn no	dr	date
A	S08-0174	CH	2008-06-02
B	S08-0181	CH	2008-06-13
C	S08-0405	CH	2008-12-10
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface  tolerance std		projection 		MM 		
			ASME Y14.5		ASME Y14.5				
			TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	C. H. TAN	2008-06-02	ANGULAR	LINEAR	0.X	±	size	Scale	
Eng	C. H. TAN	2008-06-02			0.XX	±	A4	5:2	
Chr	C. H. TAN	2008-12-10			0.XXX	±	ECN	***	
Appr	JOEY NG	2008-12-10	Product family AirMax VS			Spec ref			
			title AirMax VS R/A HEADER ASSY				deg no 10084600		
			PRESS-FIT, 120 POS, 22MM				Rev. C		
			catalog no -				CUSTOMER		
							sheet 1 of 5		

REV F - 2008-04-11

DESCRIPTION	DIM A	DIM B	DIM C
2-22MM MODULES PLACED END-TO-END	4.00	21.90 2X	22.00
1-20MM MODULE & 1-22MM MODULE PLACED END-TO-END	3.00	19.90 1X & 21.90 1X	21.00

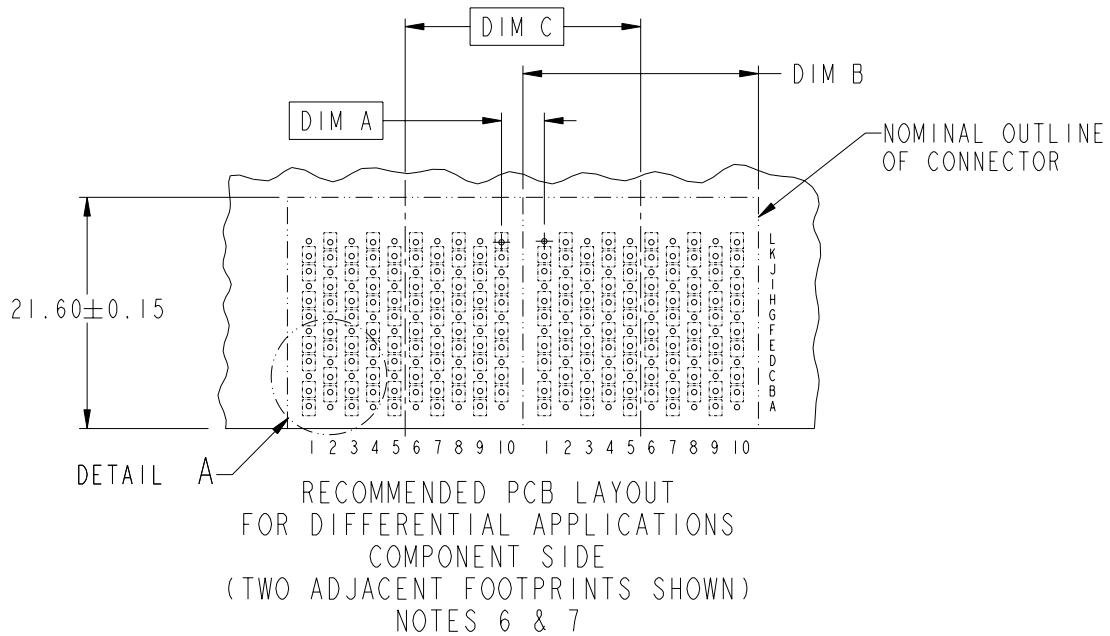


FCI	title	AirMax VS R/A HEADER ASSY	deg no	10084600	Rev.	C
	catalog no	-	CUSTOMER	sheet 2 of 5		

PDM: Rev:C

STATUS:Released

Printed: Dec 01, 2010

DESCRIPTION	DIM D	DIM E	DIM F
2-22MM MODULES PLACED END-TO-END	4.00	21.90 2X	22.00
1-20MM MODULE & 1-22MM MODULE PLACED END-TO-END	3.00	19.90 1X & 21.90 1X	21.00

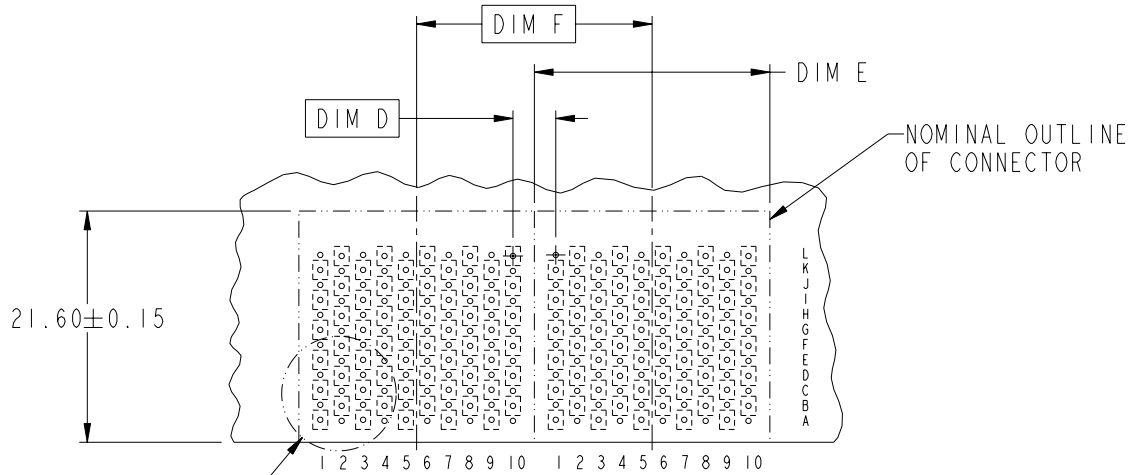

RECOMMENDED PCB LAYOUT
FOR SINGLE ENDED APPLICATIONS
COMPONENT SIDE
(TWO ADJACENT FOOTPRINTS SHOWN)
NOTES 6 & 7




title	AirMax VS R/A HEADER ASSY	dag no	10084600	Rev.	C
catalog no	-	CUSTOMER	sheet 3 of 5		

REV F - 2006-04-11

PDM: Rev:C

STATUS:Released

Printed: Dec 01, 2010

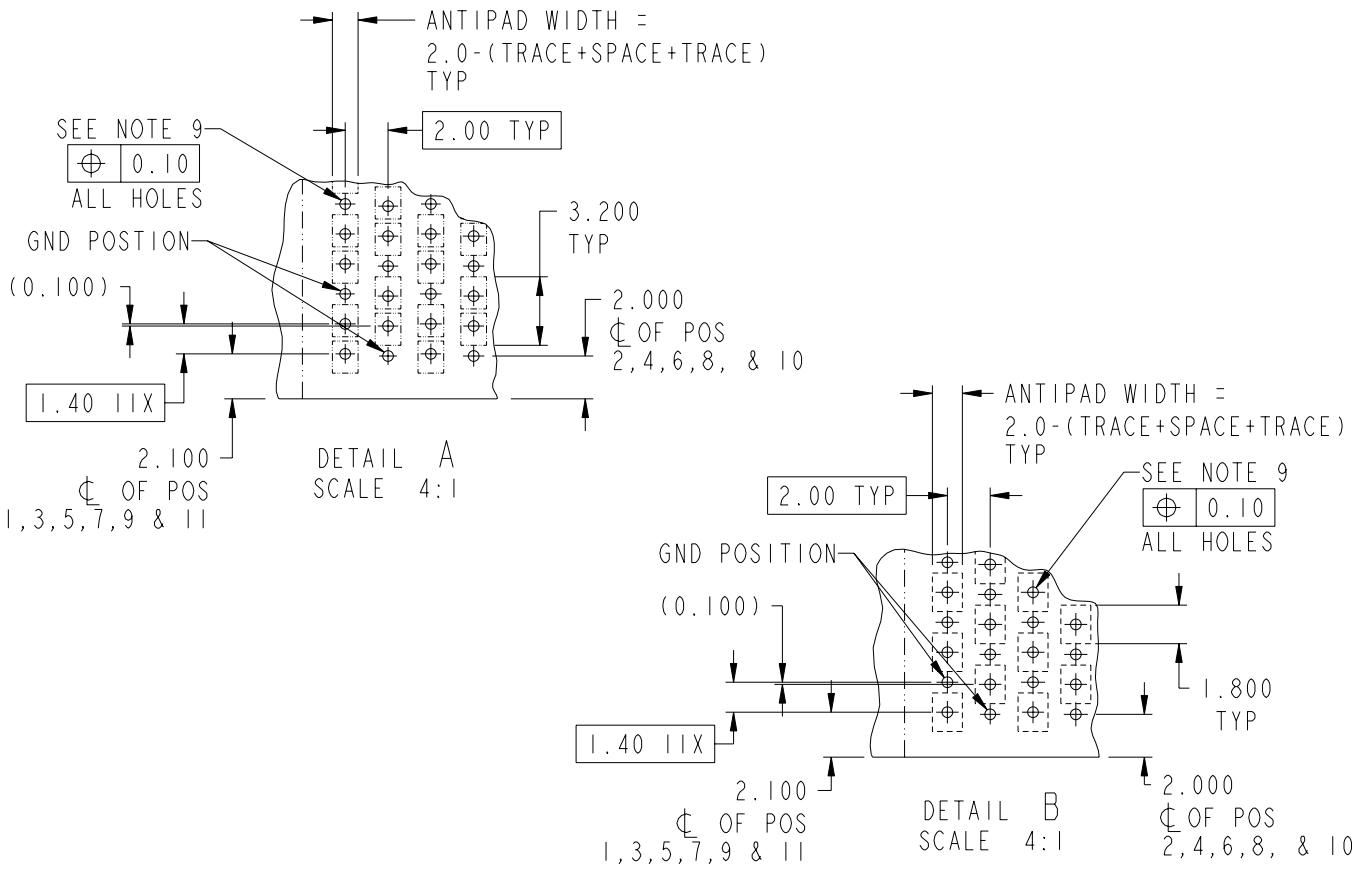


FCI	title	AirMax VS R/A HEADER ASSY	des no	10084600	Rev.	C
	catalog no	PRESS-FIT, 120 POS, 22MM	CUSTOMER	sheet 4 of 5		

PDM: Rev:C

STATUS:Released

Printed: Dec 01, 2010

PART NUMBER	PRESS-FIT TAIL PLATING TYPE	SHORT DETECT CONTACT
10084600-101LF	TIN OVER NICKEL (LEAD FREE)	NO
10084600-111LF	TIN OVER NICKEL (LEAD FREE)	YES (SEE NOTE 13)

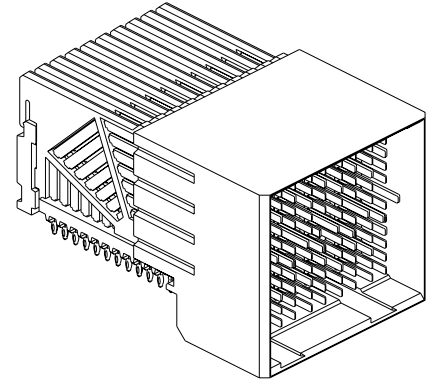

NOTES:

1. CONNECTOR MATERIALS:
HOUSING & RETAINER: HIGH TEMP THERMOPLASTIC, NATURAL, UL94V-0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94V-0
CONTACT: COPPER ALLOY
2. CONTACT PLATING:
SEPARABLE INTERFACE:
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-239, INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE.
PRESS-FIT TAILS: SEE TABLE
3. PRODUCT SPECIFICATION: GS-12-239
4. APPLICATION SPECIFICATION: GS-20-035
5. PRODUCT MARKING, (PART NUMBER & LOT CODE), ON THIS SURFACE
6. REFER TO CUSTOMER DRAWING 10035911 FOR INFORMATION REGARDING PCB LAYOUT OF POWER AND GUIDE MODULES RELATIVE TO SIGNAL MODULES
7. POSITIONS F OF ODD NUMBERED COLUMNS AND POSITIONS G OF EVEN NUMBERED COLUMNS CORRESPOND TO EARLY MATE HEADER PINS
8. THERE IS NO GROUND BUSSING WITHIN THE CONNECTOR SYSTEM
9. REFER TO CUSTOMER DRAWING 10045979 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS.

10. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
11. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
12. PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
13. MATING PIN F6 IS SHORTER THAN THE REMAINING SIGNAL PIN. NOMINAL MATING WIPE FOR PIN F6 IS 0.5MM LESS THAN ALL REMAINING SIGNAL PINS.
14. A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.



title	AirMax VS R/A HEADER ASSY	deg no	10084600	Rev.	C
catalog no	PRESS-FIT, 120 POS, 22MM	-	CUSTOMER	sheet 5 of 5	

REV F - 2006-04-17

PDM: Rev:C

STATUS: Released

Printed: Dec 01, 2010



Copyright FCI.