
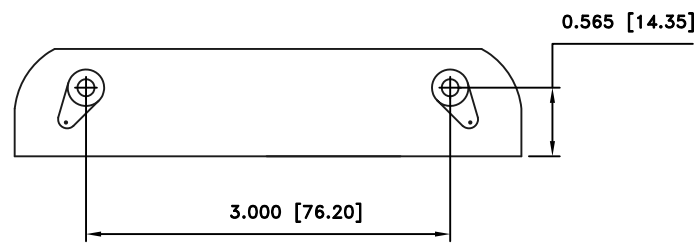
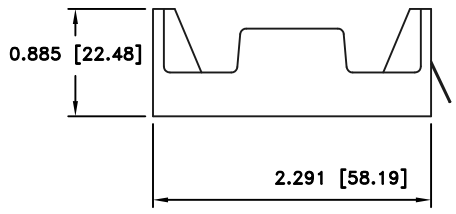


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/12/05	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/18/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/06/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	
5/31/13	D	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
6/14/13	E	UPDATED TITLE	T.B.	B.S.	

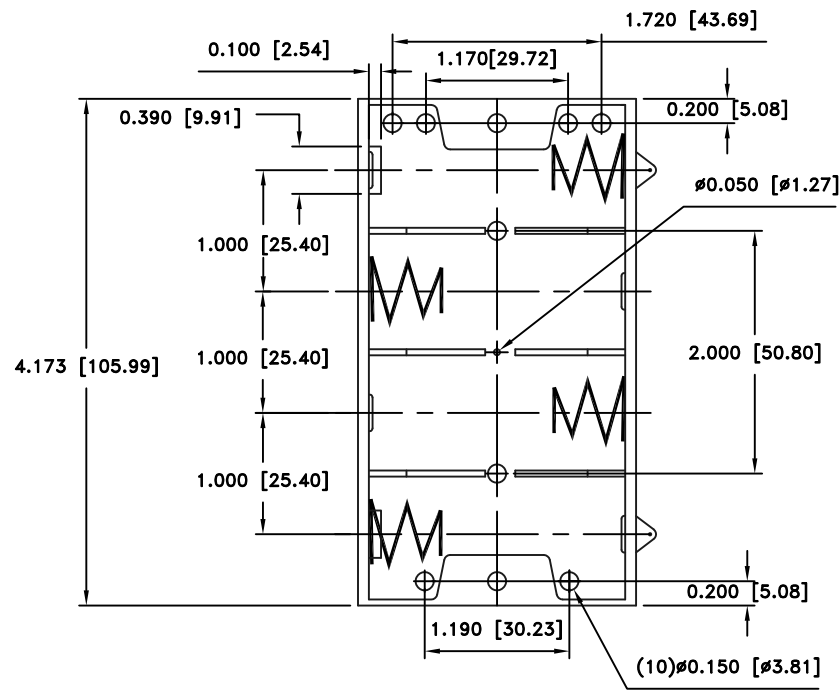


Solder Lugs shown
 ORDERING CODE BH4C

SPECIFICATIONS

Plastic material - Polypropylene
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA
 Rivets - Brass, Nickel Plated
 9Volt Snaps - Brass, Nickel Plated
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
 ROHS 2 COMPLIANT

L- Solder Lugs
 W- (6") Wire Leads
 SF- 9Volt type snaps
 B- Bump plates

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By T.S.
		1=1	Approved By T.B.
decimal ±.5 (.020)	Title FOUR "C" CELL HOLDER WITH SOLDER LUGS		
Fractional ± .8 (.030)	Date 6/14/13	Drawing Number BH4CL	
Angular ± 3°			