

Excellent Integrated System Limited

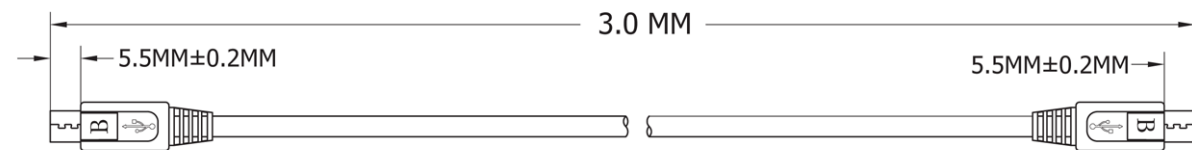



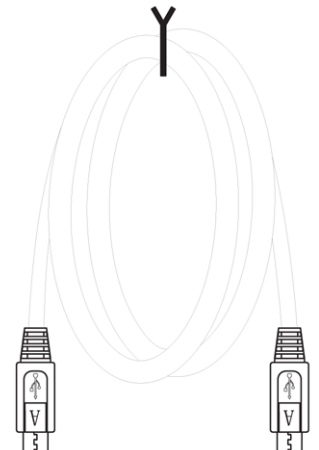
Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)
[AK67401-3](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

	1	2	3	4	5	6	7																																																																																		
A								A																																																																																	
B								B																																																																																	
C	 							C																																																																																	
D								D																																																																																	
E	PIN ASSIGNMENT <table><tr><td>P1</td><td></td><td>P2</td></tr><tr><td>1</td><td>RED</td><td>1</td></tr><tr><td>2</td><td>WHITE</td><td>2</td></tr><tr><td>3</td><td>GREEN</td><td>3</td></tr><tr><td>5</td><td>BLACK</td><td>5</td></tr><tr><td>SHELL</td><td>DRAIN + BRAID</td><td>SHELL</td></tr></table>							P1		P2	1	RED	1	2	WHITE	2	3	GREEN	3	5	BLACK	5	SHELL	DRAIN + BRAID	SHELL	E																																																															
P1		P2																																																																																							
1	RED	1																																																																																							
2	WHITE	2																																																																																							
3	GREEN	3																																																																																							
5	BLACK	5																																																																																							
SHELL	DRAIN + BRAID	SHELL																																																																																							
F	Material: - Cable: USB2.0 UL2725 [28AWG(7/0.12TC+A:)*1P+28AWG(7/0.12TC)*2C]+AEB(488 TC) - Jacket: Black - OD: 3.5MM - Connectors: Micro USB 5P B/M Solder Type - Shell: Nickel - Pin: G/F - Insulator Color: Black - Outer Jacket: Black PVC-50P Electrical: 100% short, open, miswire test - Conduct resistance: 2Ω Max. - Insulation resistance: 5MΩ Min. - Hi-Pot test: 300V DC							F																																																																																	
G	<table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td></td><td>Name</td><td>Item No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>10/11/12</td><td>Miller</td></tr><tr><td>X.X</td><td>±0.40</td><td></td><td></td><td></td><td></td><td>Approved</td><td>10/11/12</td><td>Miller</td></tr><tr><td>X.XX</td><td>±0.25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XXX</td><td>±0.15</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>±3°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>							Scale	1:1						Name	Item No.	TOLERANCE						Drawn	10/11/12	Miller	X.X	±0.40					Approved	10/11/12	Miller	X.XX	±0.25								X.XXX	±0.15								Angle	±3°																																			G
Scale	1:1						Name	Item No.																																																																																	
TOLERANCE						Drawn	10/11/12	Miller																																																																																	
X.X	±0.40					Approved	10/11/12	Miller																																																																																	
X.XX	±0.25																																																																																								
X.XXX	±0.15																																																																																								
Angle	±3°																																																																																								
H	  <table><tr><td>Modification</td><td>Date</td><td>Name</td><td></td><td></td><td></td><td></td><td></td></tr></table>							Modification	Date	Name						H																																																																									
Modification	Date	Name																																																																																							
	1	2	3	4	5	6	7																																																																																		